

STANDARD ENGINEERING SYMBOLS

THE SEAL(S) AND SIGNATURE(S) APPLY ONLY TO THE DOCUMENT TO WHICH THEY ARE AFFIXED, AND EXPRESSLY DISCLAIM ANY RESPONSIBILITY FOR ALL OTHER PLANS, SPECIFICATIONS, ESTIMATES, REPORTS OR OTHER DOCUMENTS OR INSTRUMENTS RELATING TO OR INTENDED TO BE USED FOR ANY PART OR PARTS OF THE ARCHITECTURAL OR ENGINEERING PROJECT.



Webster University
Interdisciplinary Science
Building

CANNONDESIGN

1100 Clark Avenue
St. Louis, Missouri 63102
T: 314.241.6250
F: 314.241.2570

William Tao & Associates, Inc.
ME/PFP Engineer
7955 Manchester Road, Suite 125
St. Louis, MO 63143
314-884-7600

David Mason & Associates, Inc.
Structural & Civil Engineer
800 South Vandeventer Avenue
St. Louis, MO 63110
314.534.1053

Faith Group
Technology
3101 S. Hanley Rd., Suite 100
St. Louis, MO 63143
314.591.2229

Kuhlmann Leavitt, Inc.
Environmental Graphics & Signage
7400 Pershing Ave.
St. Louis, MO 63130
314.725.6616

KWA Architects
Architecture
8721 Litzinger Road
St. Louis, MO 63124
314.962.2560

Spellman Brady & Company
Interior Designer
8251 Maryland Avenue, Suite 300
St. Louis, MO 63105
314.862.0070

SWT Design
Landscape Architect
7722 Big Bend Blvd.
St. Louis, MO 63119
314.644.5700

Webb Engineering Services, Inc.
Planning & Fire Protection
1400 S. 3rd Street, Suite 201
St. Louis, MO 63104
314.588.0600

ISSUED FOR CONSTRUCTION (BP2) 01 MAR 2016
No. Description Date



Drawing Title:

**STANDARD MECHANICAL
AND ELECTRICAL
SYMBOLS SHEET**

Project No.: 04561.01 Checked by:

ME0002

ELECTRICAL

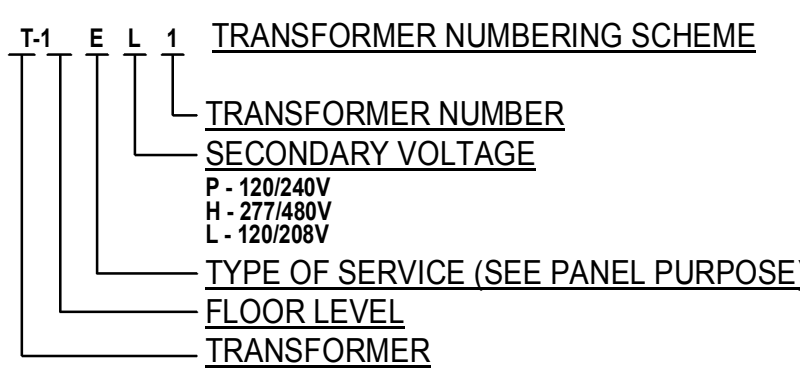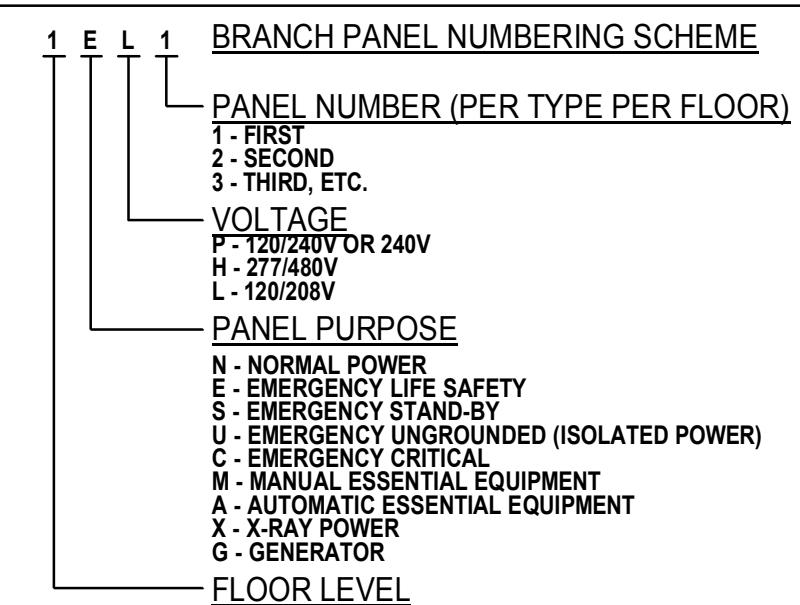

ABBREVIATIONS FOR ELECTRICAL EQUIPMENT

MOUNTING

ELECTRICAL EQUIPMENT SHALL BE MOUNTED AT HEIGHTS INDICATED IN SPECIFICATIONS. SYMBOL, SCHEDULES, HEIGHTS MARKED AT OUTLETS, AND AS FOLLOWS: HEIGHTS ARE TO CENTERLINES OF DEVICES.

WIRING DEVICE SUBSCRIPTS

C	COUNTER OUTLET - BOTTOM OF OUTLET BOX TO OCCUR 1" ABOVE HIGHEST ELEMENT OF COUNTER (I.E. BACKSPASH, OR COUNTER TOP IF NO BACKSPASH).
CR	CASEWORK RECESSED OUTLET - MOUNT BOX IN CASEWORK VERTICAL SURFACE. BOTTOM OF BOX 1" ABOVE WORKING SURFACE. PROVIDE JUNCTION BOX AND INTERCONNECTION BOXES WITH FLEXIBLE CONDUIT.
E	DEVICE ON EMERGENCY CIRCUIT
EQ	EQUIPMENT OUTLET - FINAL TERMINATION METHOD AND EXACT LOCATION TO BE DETERMINED FROM EQUIPMENT MANUFACTURER'S SHOP DRAWINGS.
EX	EXISTING DEVICE TO REMAIN
S	SURFACE MOUNTED DEVICE

MISCELLANEOUS ABBREVIATIONS






ADP	AUTOMATIC DATA PROCESSING	MC	MOTOR CONTROL PANEL
AFF	ABOVE FINISHED FLOOR	MH	MOUNTING HEIGHT
ATS	AUTOMATIC TRANSFER SWITCH	MTS	MANUAL TRANSFER SWITCH
CB	CIRCUIT BREAKER	NC	NORMALLY CLOSED
CC	CLOSED CIRCUIT	NO	NORMALLY OPEN
CCTV	CLOSED CIRCUIT TELEVISION	PE	PULL BOX
ED	EXPLOSION PROOF	PWCP	PREWIRED CONTROL PANEL
EP	ELECTRICALLY OPERATED	RS	ROUGH-IN ONLY
FL	FIELD DATA PANEL	RT	RAINTIGHT (NEMA 3R)
FDP	FLEXIBLE CONDUIT	ST	SWITCHBOARD
FLA	FULL LOAD AMPERES	SWD	SWITCH
FS	FUSIBLE SWITCH	TEL	TELEPHONE
GB	GROUND BUS	TS	TIMESWITCH
GR	GROUND FAULT	TV	TELEVISION SYSTEM
GRC	GALVANIZED RIGID STEEL	UNG	UNDERGROUND
HP	HORSEPOWER	VP	WEATHERPROOF
KW	KILOWATTS	WT	WATERTIGHT (NEMA 12)
MCA	MINIMUM CIRCUIT AMPERES	XFMR	TRANSFORMER
MCB	MINIMUM CIRCUIT BREAKER		
MCC	MOTOR CONTROL CENTER		

WIRING DEVICES

SWITCHES - SINGLE POLE, 2 POLE, 3 WAY, 4 WAY
LOWER CASE LETTER INDICATES SWITCH LEG (TYPICAL ALL SWITCHES)


KEY SWITCHES - SINGLE POLE, 3 WAY, ETC.

\$ K	\$ K ³	PILOT LIGHT SWITCH
\$ PL		MOMENTARY CONTACT SWITCH
\$ M		MOTION SENSOR SWITCH - CEILING MOUNTED
\$ X		A - 360° PIR
\$ X		B - 360° DUAL TECH
\$ X		C - 180° PIR
\$ X		D - 180° DUAL TECH
\$ PIR		WALL SWITCH SENSOR
\$ 1		SINGLE RECP. - 120V GROUNDING TYPE - STANDARD MH
\$ 1		DUPLEX RECP. - 120V GROUNDING TYPE - STANDARD MH
\$ 1		DUPLEX RECP. - 120V ISOLATED GROUNDING TYPE - STANDARD MH
\$ USB		DUPLEX RECEPTACLE WITH USB PORTS
\$ 1		WIRED THRU OF RECEPTACLE
\$ 1		DUPLEX RECP. - 120V GROUND FAULT TYPE - STANDARD MH
\$ 1		DUPLEX RECEPTACLE WITH ONE BOSS SWITCHED
\$ 1		DUPLEX RECP. - MH 42" TOILET; MH 48" UNFINISHED AREAS
\$ 1		DOUBLE DUPLEX RECP. - 120V GROUND, TYPE - STAND. MH
\$ 1		SPECIAL RECEPTACLE - SEE NOTE ON DRAWING
\$ 1		FLOOR BOX - WITH DEVICES INDICATED
\$ 1		R-RECESSED TYPE (WITH WIRE MANAGEMENT SLOT)
\$ 1		F-FLUSH TYPE
\$ 1		U-UNDERFLOOR TYPE (BELOW RAISED FLOOR)
\$ 1		FLOOR BOX - WITH SPECIAL RECEPTACLE
\$ 1		RI-ROUGH IN ONLY
\$ 1		POWER POLE
\$ 1		CHIME, BELL
\$ 1		BUZZER
\$ 1		GENERAL HORN - WALL MOUNTED DUAL, SINGLE
\$ 1		PUSHBUTTON (QTY. OF CIRCLES = QTY. OF BUTTONS)
\$ 1		EPO - EMERGENCY POWER OFF PULL STATION
\$ X		SWITCH - DIGITAL
\$ X		1CH - 1 BUTTON CHANNEL 1/1
\$ X		2CH - 2 BUTTONS (2 CHANNELS)
\$ X		3CH - 3 BUTTONS (3 CHANNELS)
\$ X		4CH - 4 BUTTONS (4 CHANNELS)
\$ X		6CH - 6 BUTTONS (6 CHANNELS)
\$ X		1RL - 3 BUTTONS 1 CHANNEL PLUS RAISE/LOWER
\$ X		2RL - 6 BUTTONS 2 CHANNELS PLUS RAISE/LOWER
\$ X		3PR - 6 BUTTONS (4 PRESETS PLUS RAISE/LOWER)
\$ X		6PR - 6 BUTTONS (6 PRESETS)
\$ DX		DIMMER SWITCH - MH 48"
\$ DX		X = NUMERICAL SUBSCRIPT IDENTIFYING DIMMER TYPE
\$ 1		CLOCK HANGER OUTLET, WITH SINGLE RECEPTACLE
\$ 1		MH 7'-6" AFF OR 12" BELOW CEILING
\$ 1		M - FOR FUTURE MANUALLY CORRECTED INDICATOR CLOCK
\$ 1		C - COMPLETE WITH MANUALLY CORRECTED INDICATOR CLOCK
\$ PM-30		SURFACE RACEWAY
\$ 1		PM - NUMBER INDICATES TYPE (SEE SPECIFICATIONS)
\$ 1		PHOTOCELL

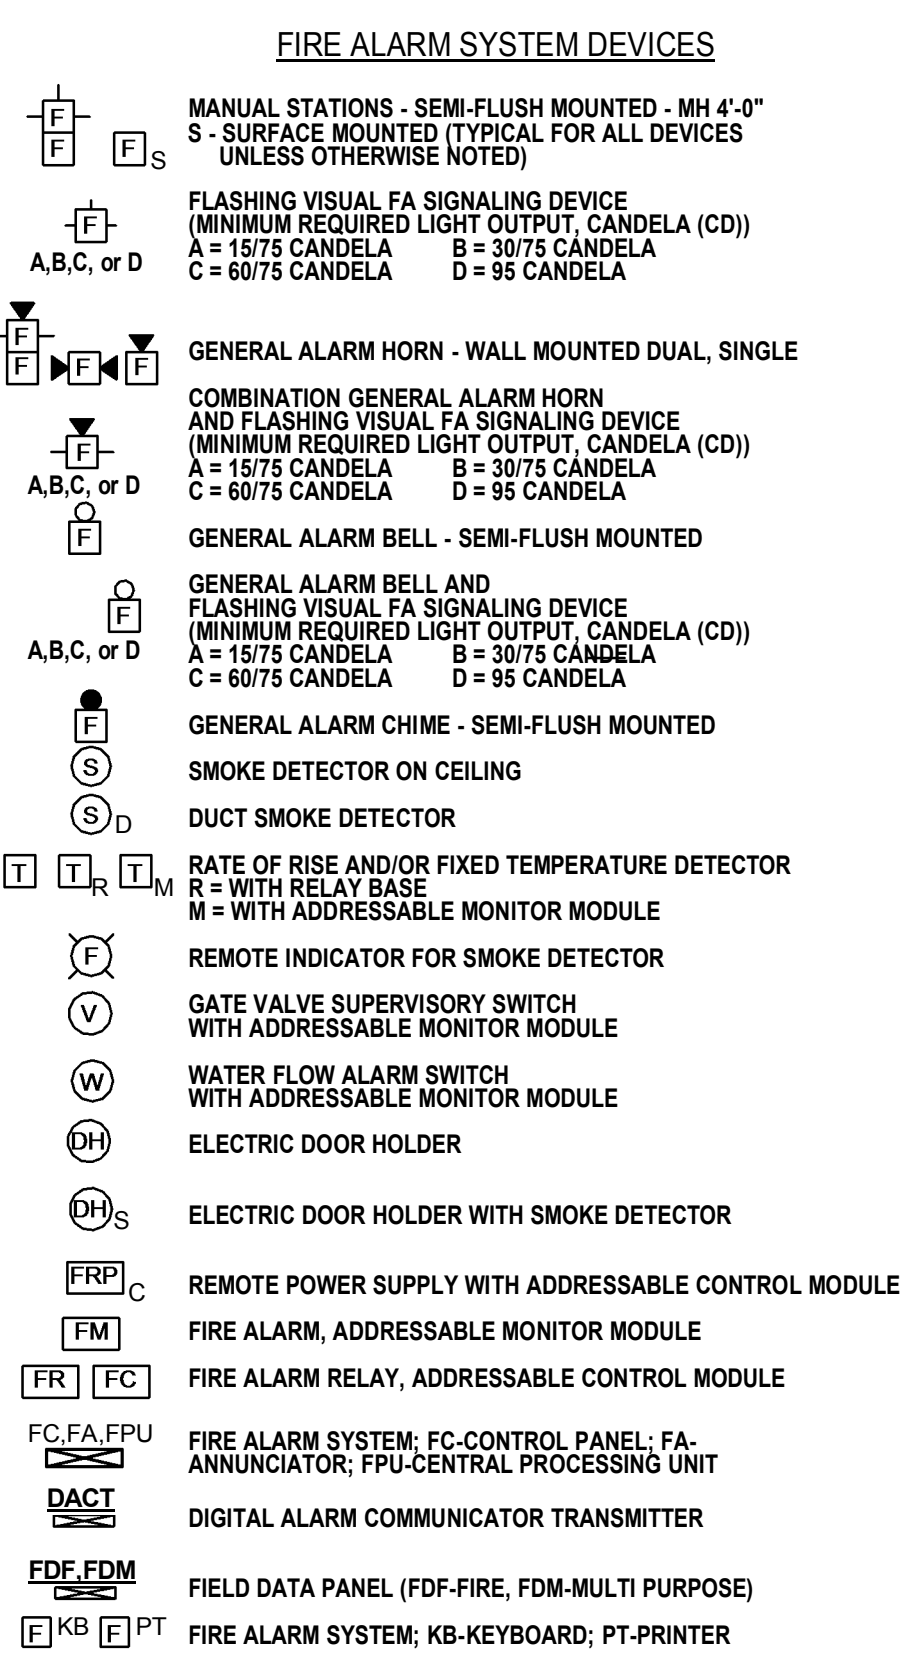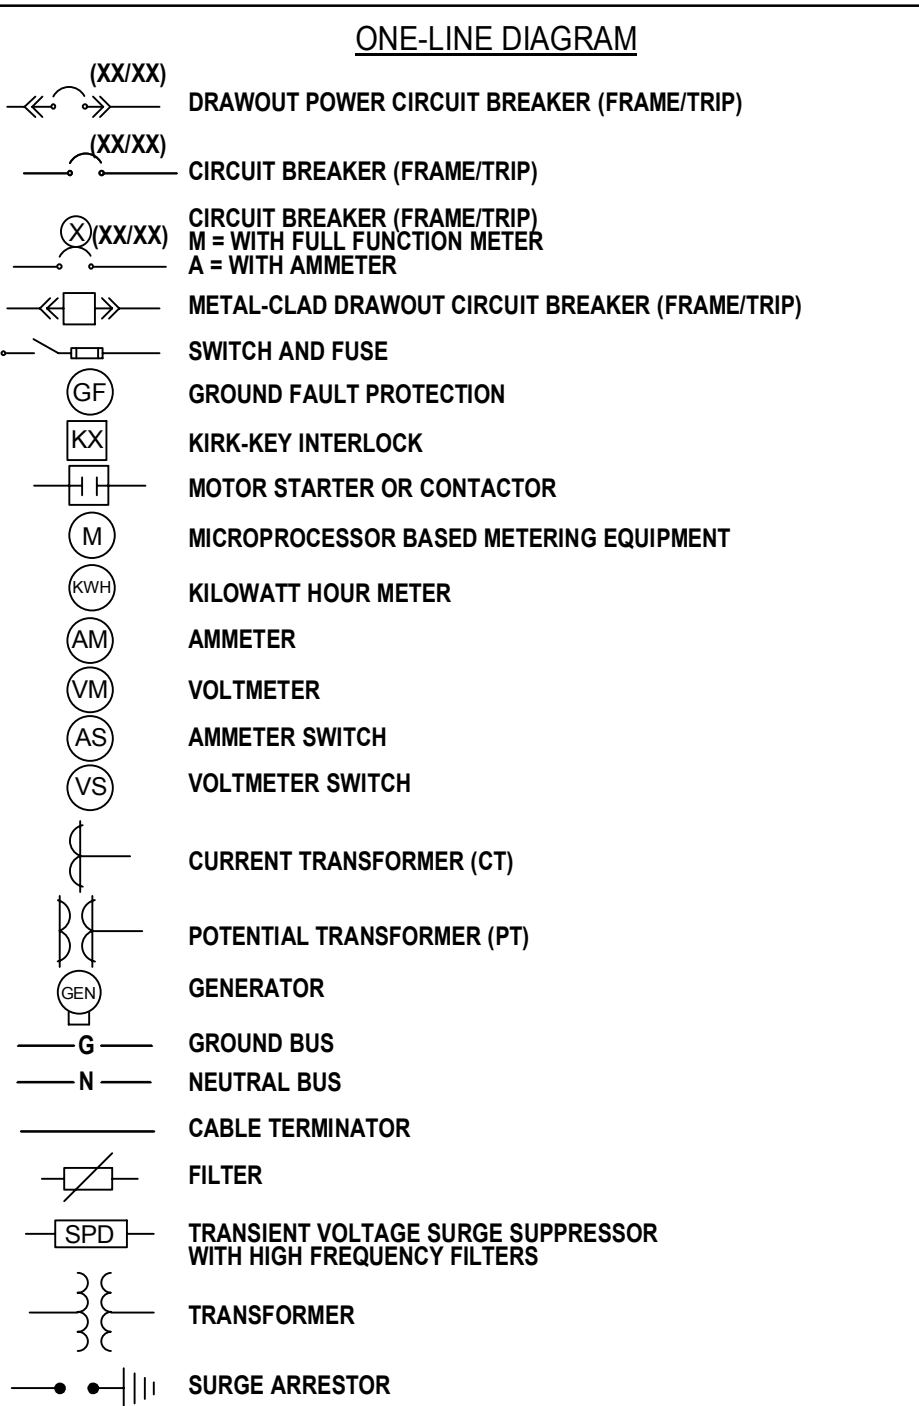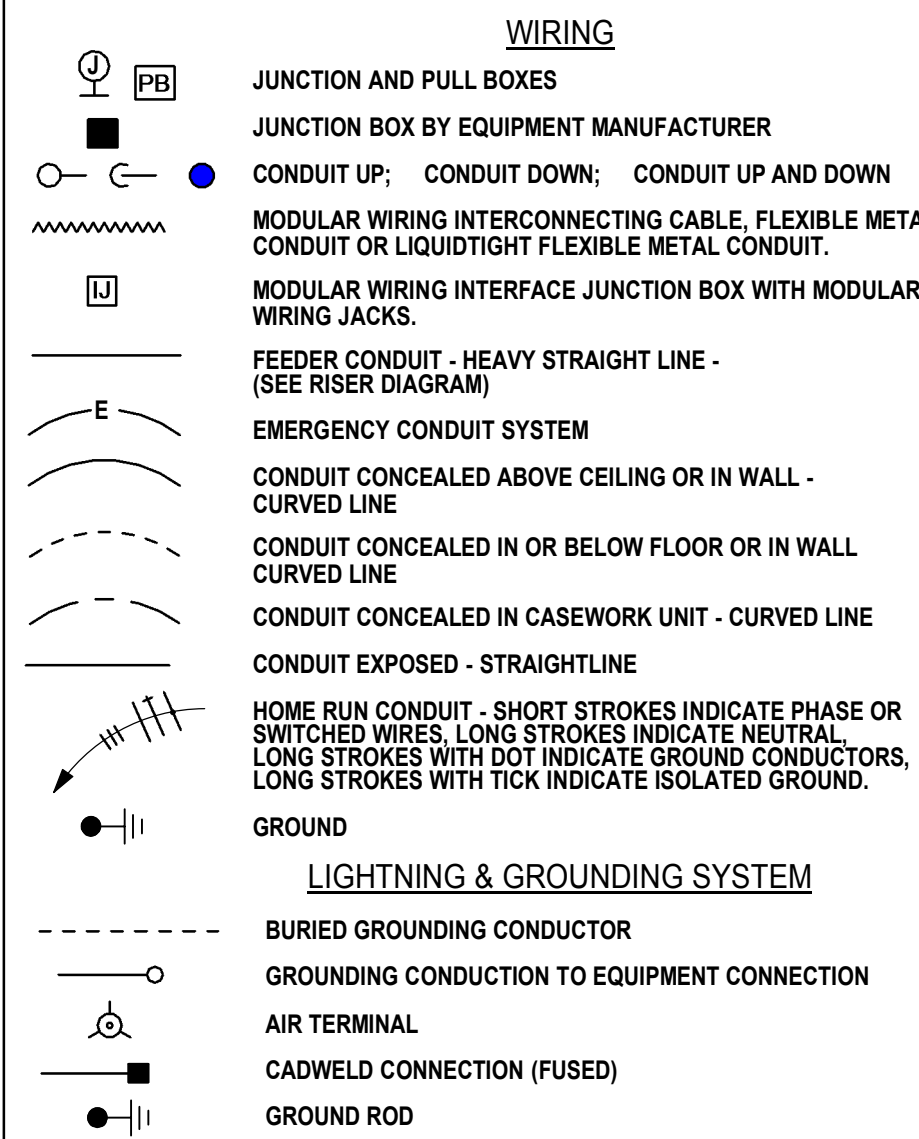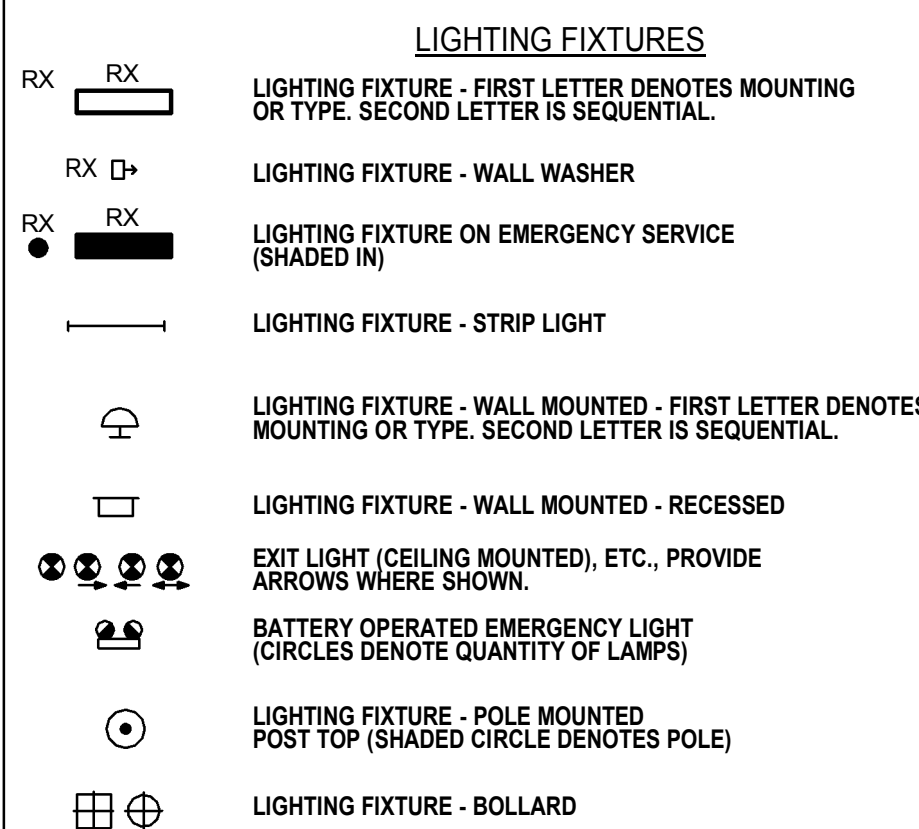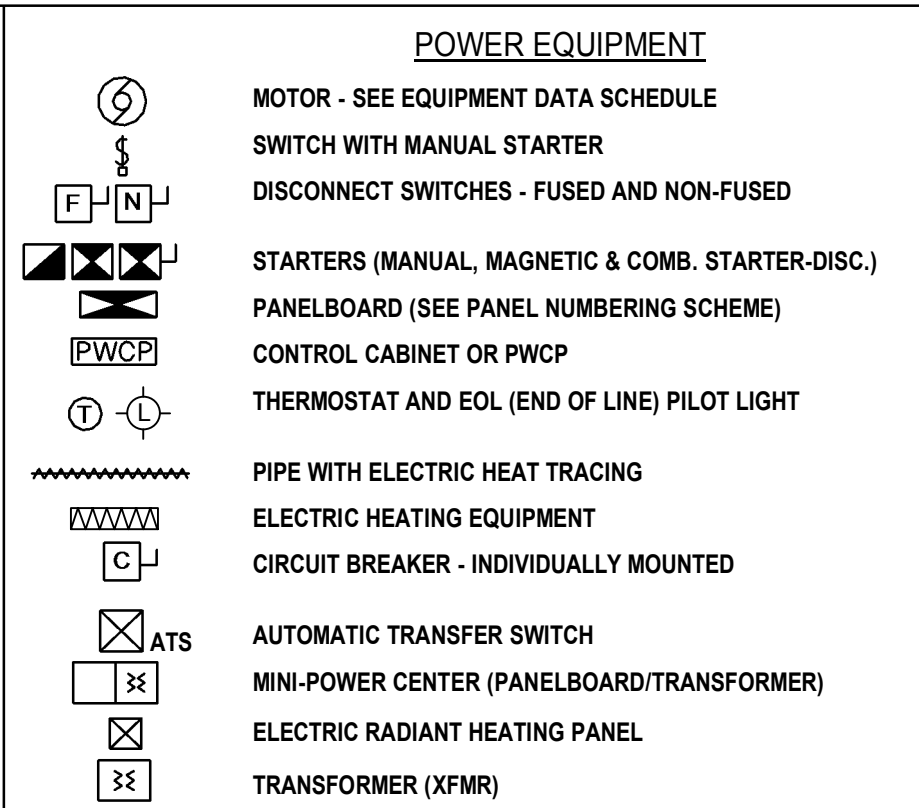


COMMUNICATIONS ROUGH-IN


TELECOMMUNICATIONS ROUGH-IN: REFER TO TECHNOLOGY DRAWINGS FOR ROUGH-IN INFORMATION

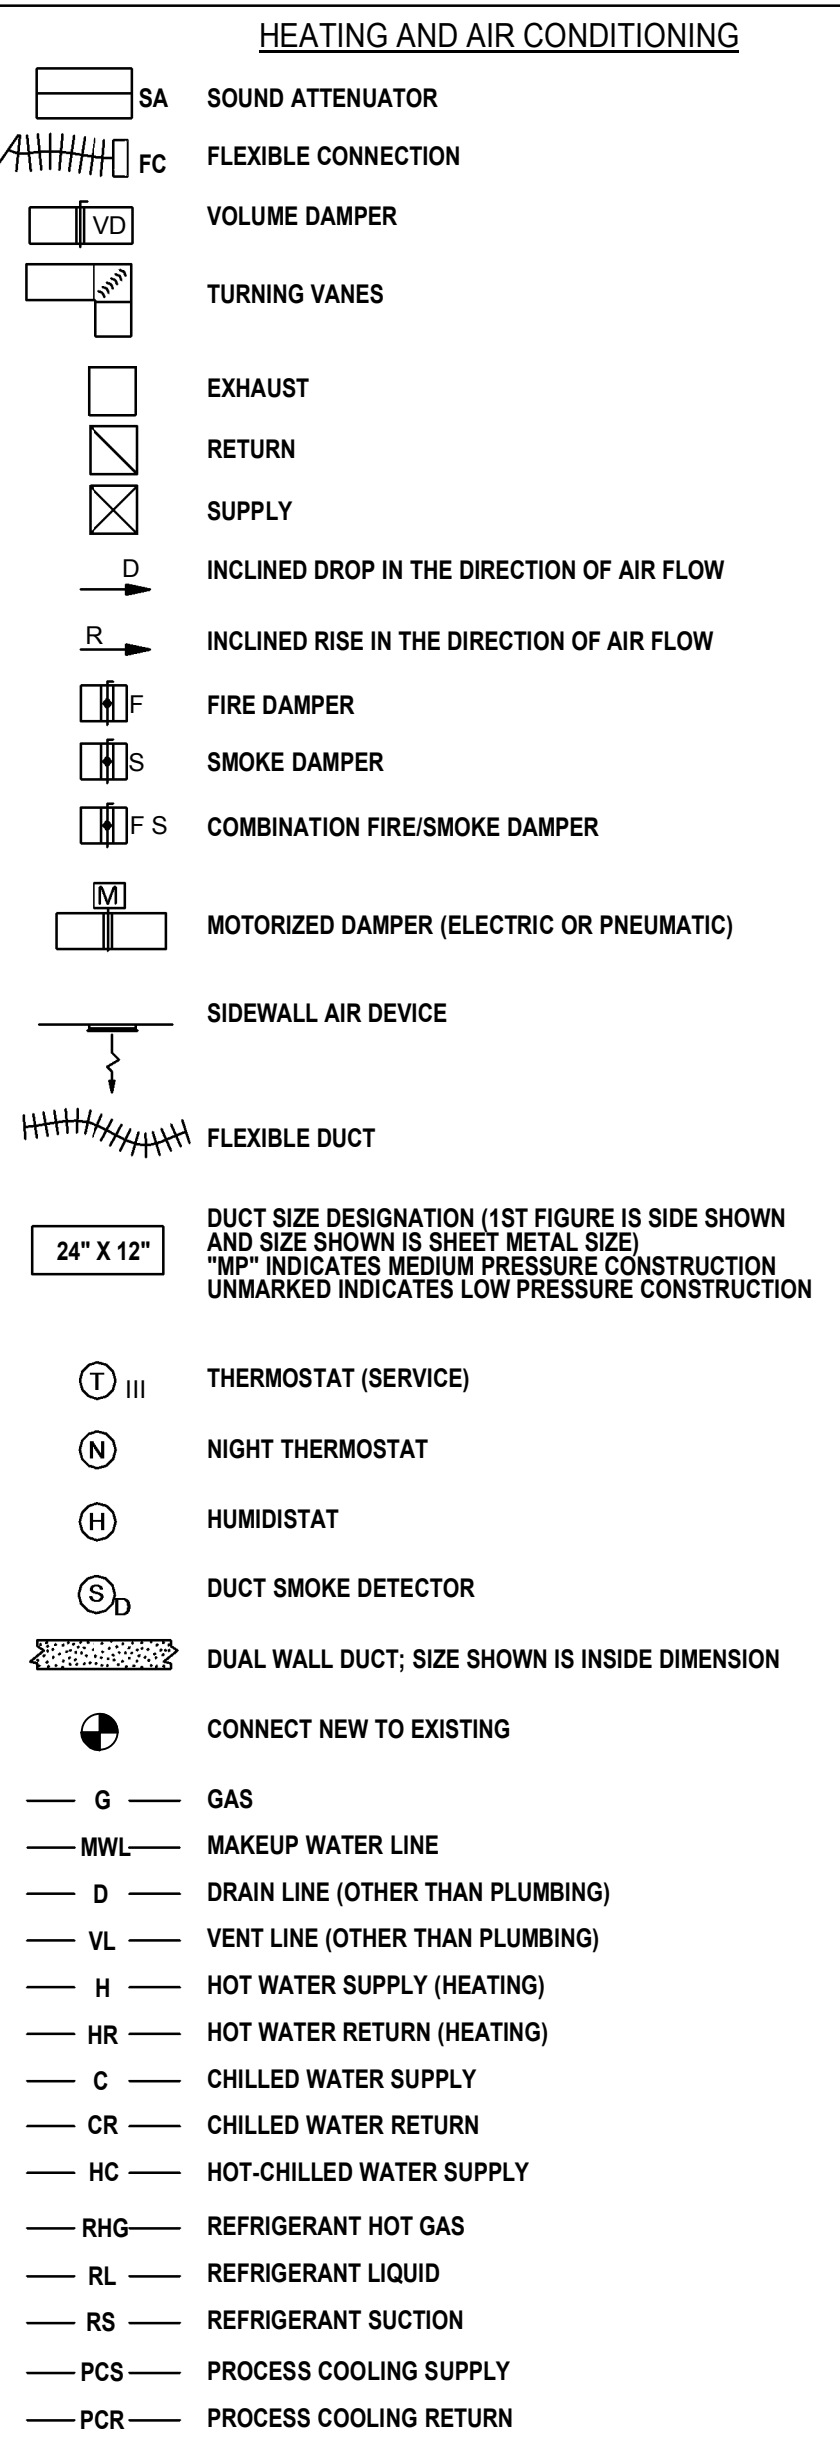

MECHANICAL

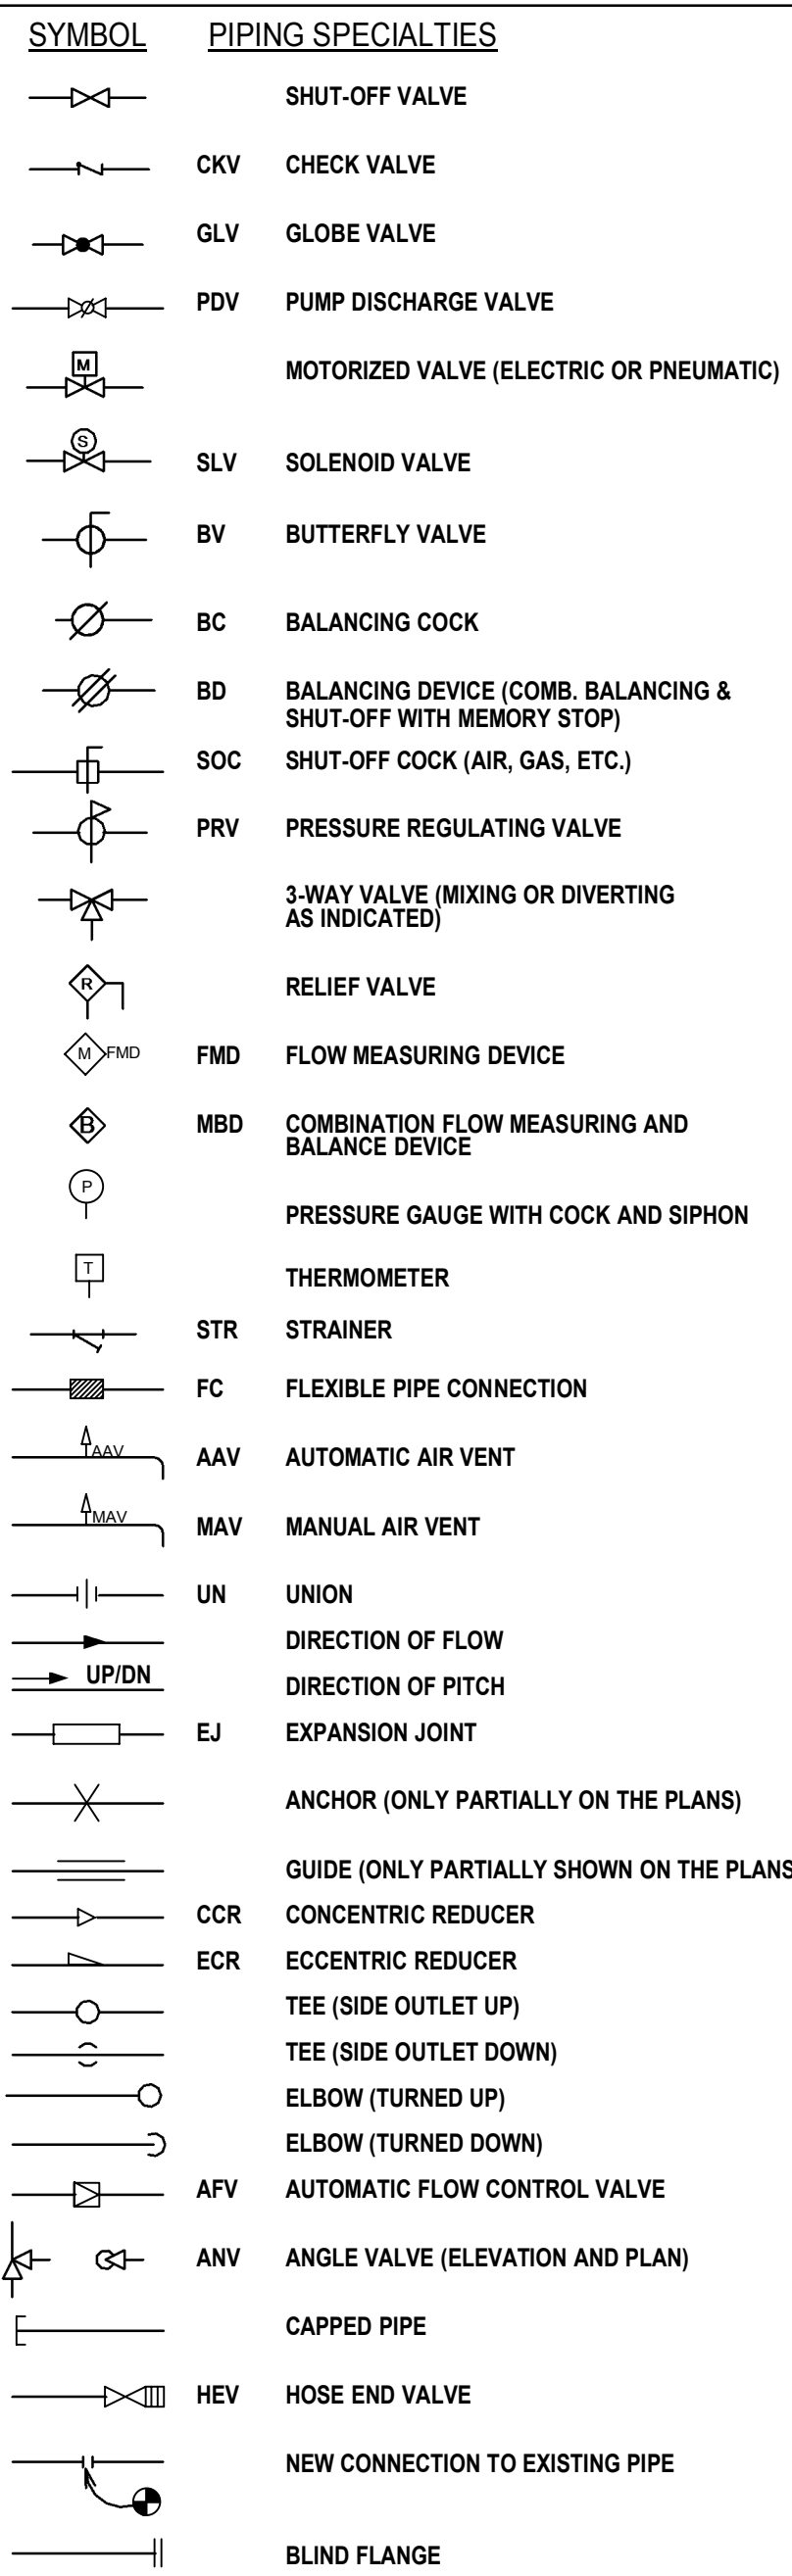

MISCELLANEOUS

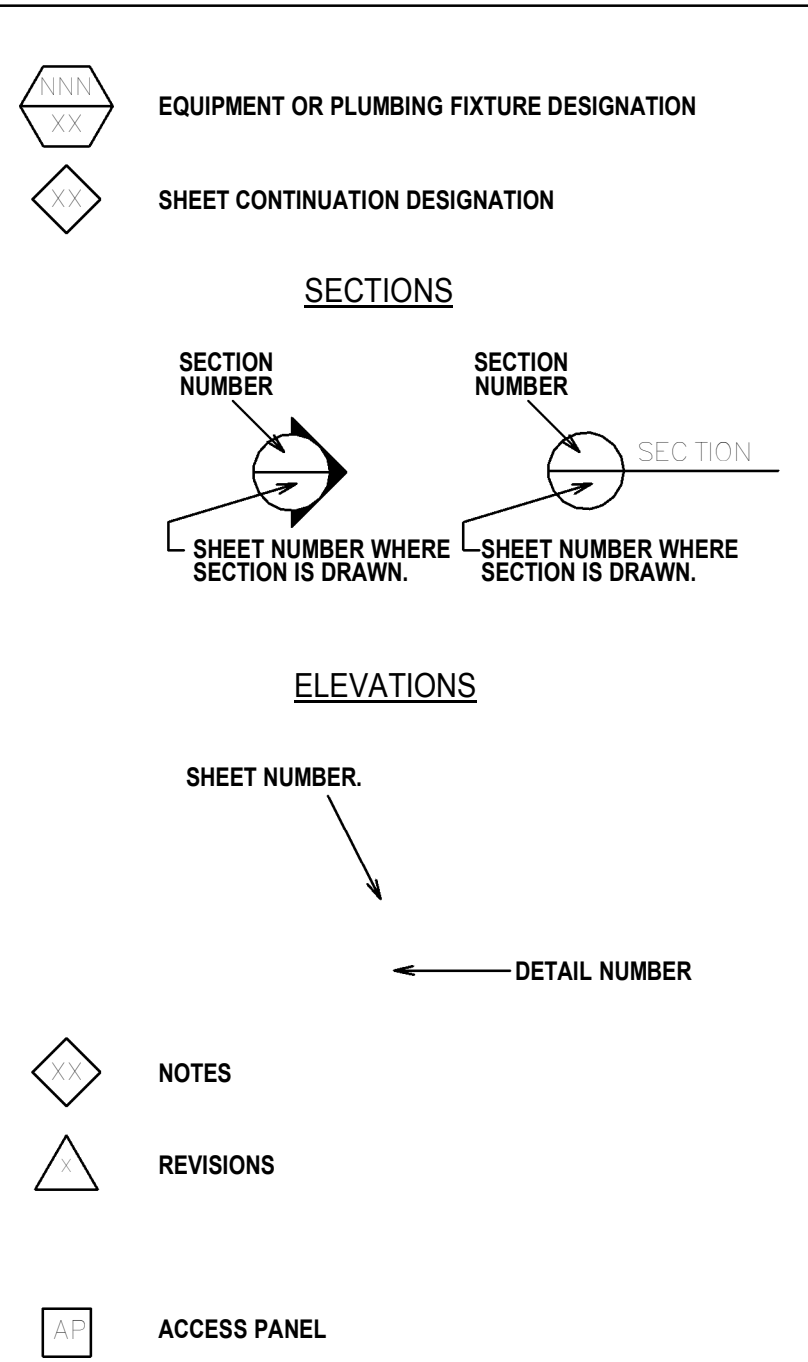

MISCELLANEOUS ABBREVIATIONS

AS	AIR SEPARATOR	OA	OUTSIDE AIR
BDW	BACKDRAFT DAMPER/MOTORIZED	OFCD	OWNER FURNISHED, CONTRACTOR INSTALLED
CFD	CONTRACTOR FURNISHED, CONTRACTOR INSTALLED	OFCD	OWNER FURNISHED, CONTRACTOR INSTALLED
EC	EXPANSION COMPENSATOR	PD	PUMP DISCHARGE
EL	ELEVATION	PT	PLUGGED TEE
FMD	FLOW MEASURING DEVICE	RA	RETURN AIR
GA	GAUGE	SV	SAFETY VALVE
GBO	GRAVITY BACKDRAFT DAMPER	TCP	TEMPERATURE CONTROL PNL
TPD	TRANSFER PUMP DISCHARGE	VFM	VENTURI FLOW METER