


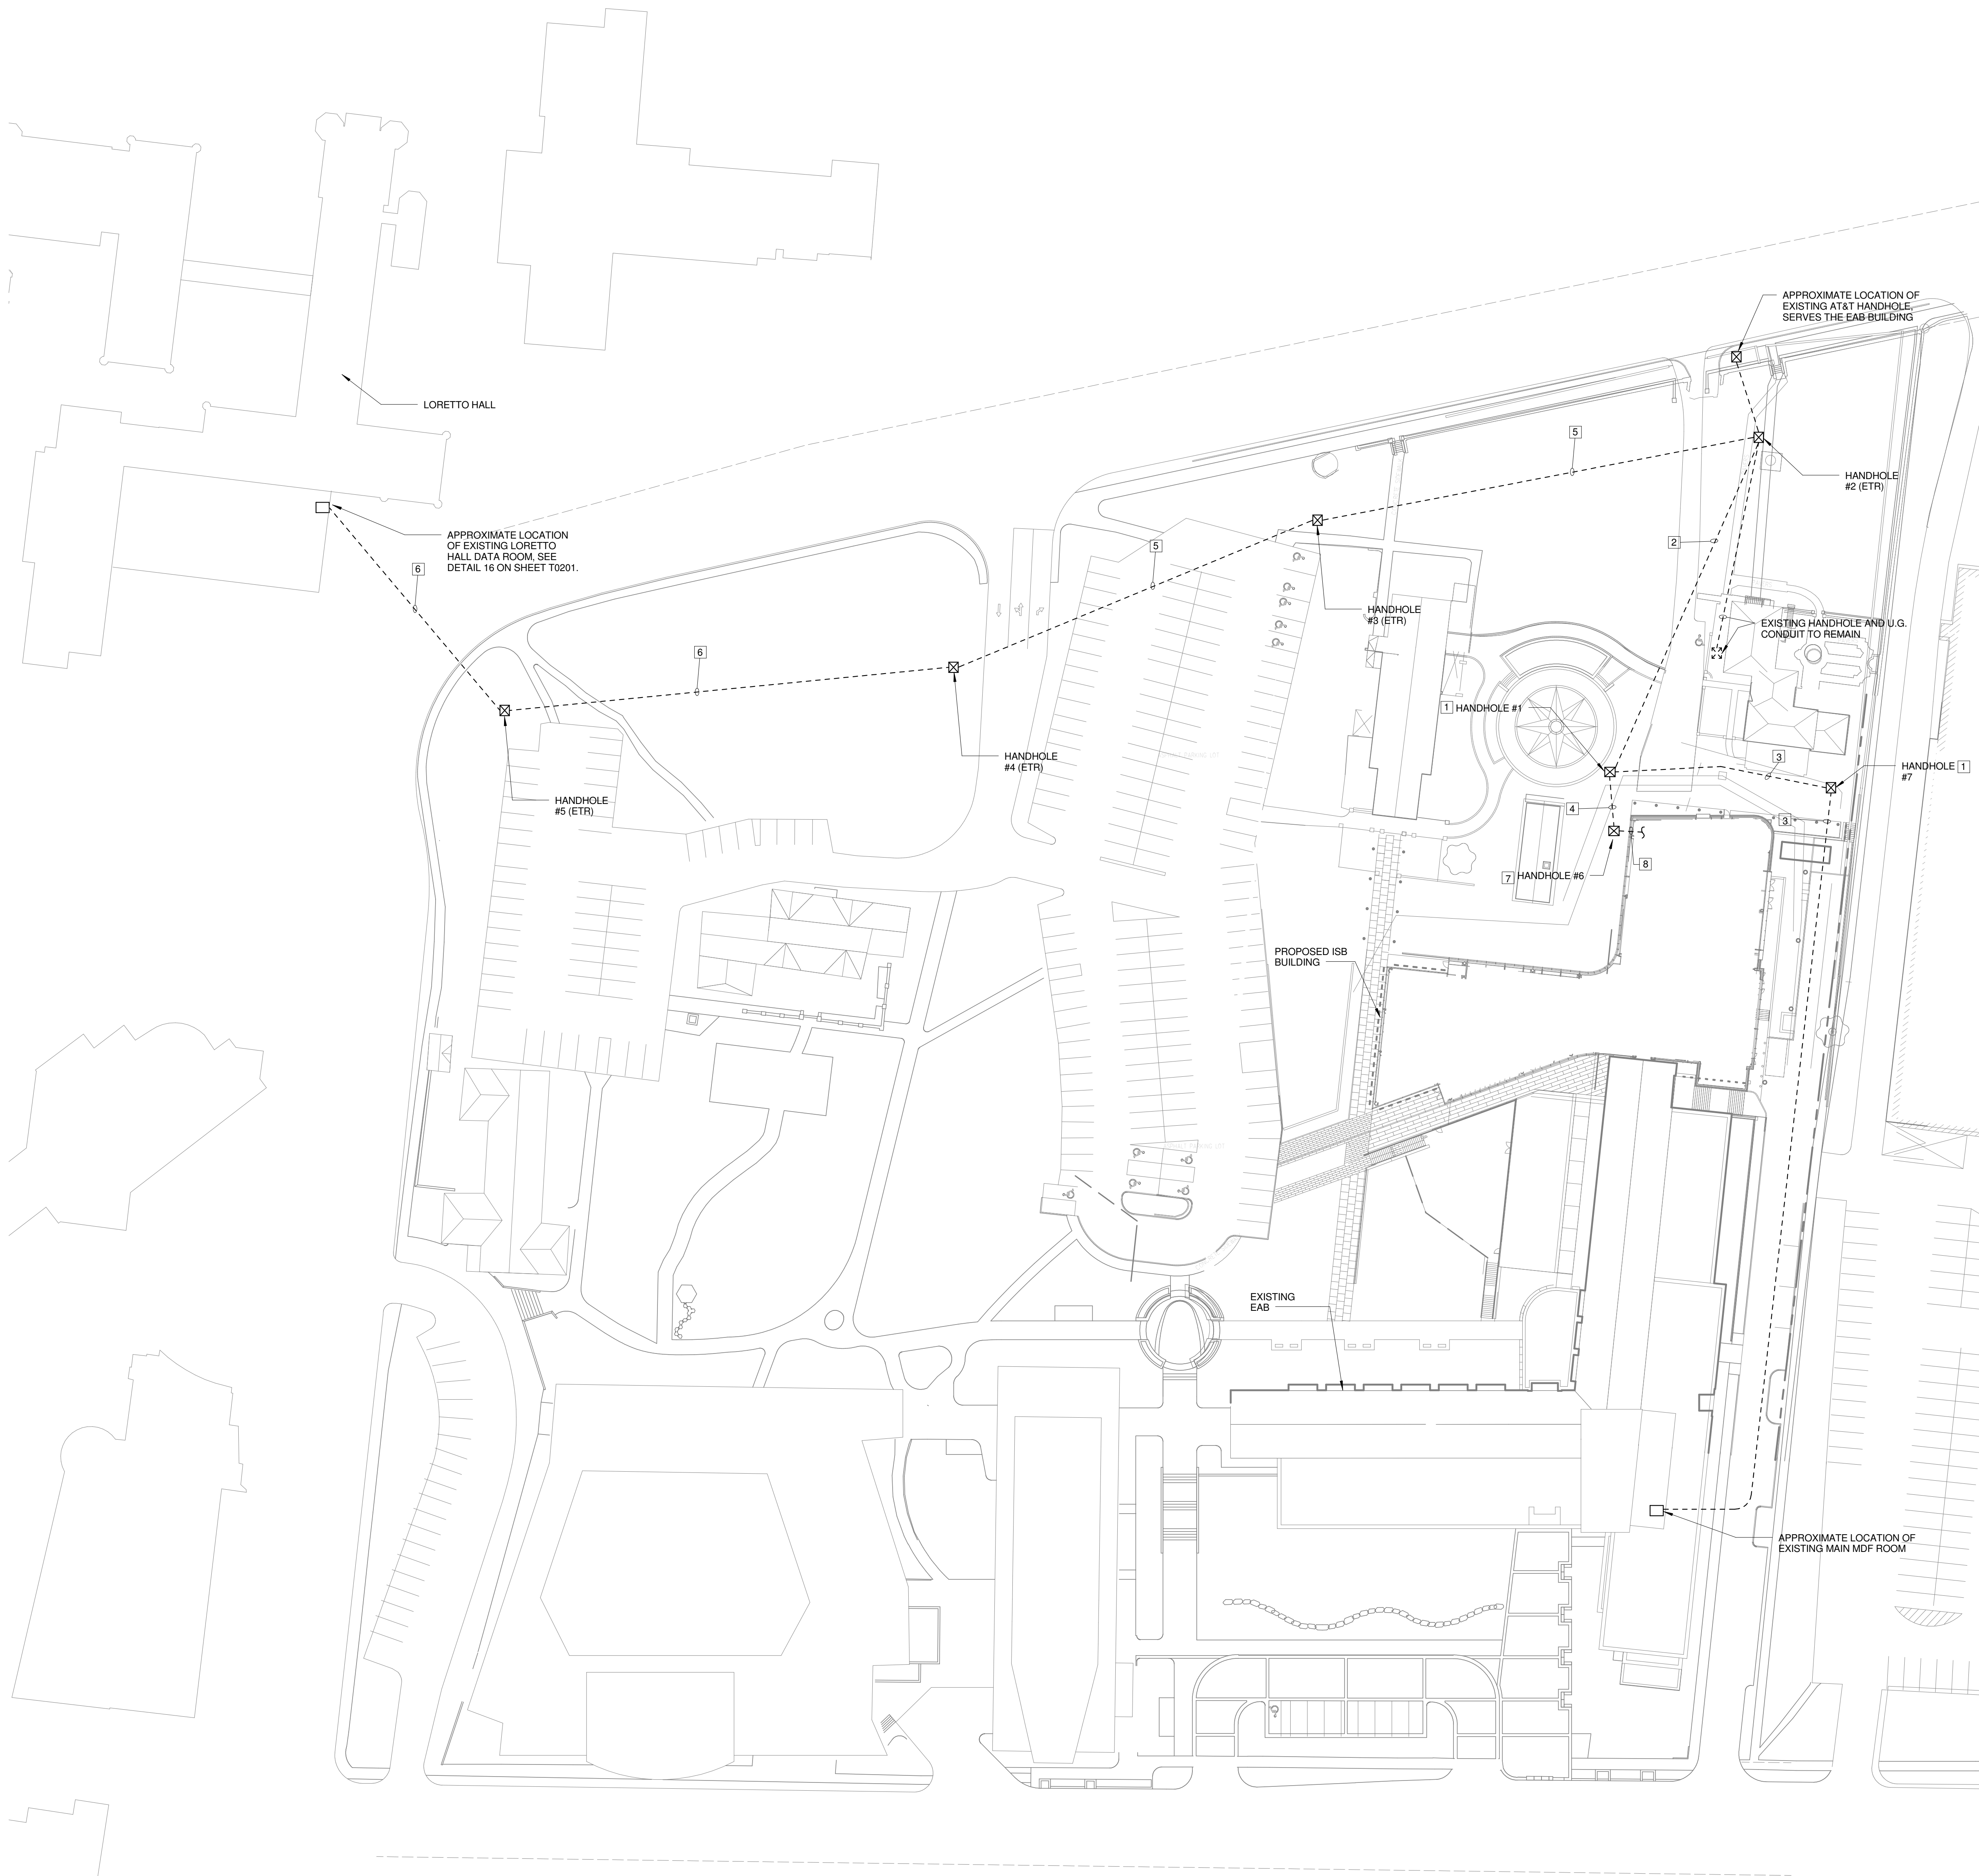

1 TECHNOLOGY SITE PLAN
1" = 40'-0"

GENERAL NOTES:

1. SEE "PDS BACKBONE CABLING DIAGRAM" ON SHEET T0801 FOR F.O. CABLE INFORMATION FROM LORETTO HALL TO THE ISB.
2. FIBER OPTIC AND COPPER BACKBONE CABLING SHALL BE OUTDOOR RATED WHEN INSTALLED IN UNDERGROUND CONDUITS. SEE DIVISION 27 SPECIFICATIONS FOR MORE INFORMATION.
3. PROVIDE A MINIMUM OF 25 FEET SERVICE LOOP IN ALL HANDHOLES.
4. SPLICE ENCLOSURES INSTALLED IN HANDHOLES SHALL BE RATED FOR INSTALLATION IN UNDERGROUND HANDHOLES.
5. PROVIDE LARGE RADIUS SWEEPS AT ALL CONDUIT BENDS NO LESS THAN 36" RADIUS. PULLING ELBOWS SHALL NOT BE USED.
6. COORDINATE ALL BELOW GRADE UTILITY WORK WITH EXISTING UTILITIES AND THE WORK OF OTHER TRADES PRIOR TO ROUGH-IN.

KEYED NOTES:

THIS SHEET ONLY

1. PROVIDE A STRONGWELL QUAZITE 24" X 36" X 18" DEEP OPEN BOTTOM HANDHOLE #PG2436BA18 WITH COVER #PG2436CA00 AND LOGO TO READ "COMMUNICATION".
2. STUB EXISTING 4" UNDERGROUND PVC CONDUITS AND INNERDUCTS UP INSIDE HANDHOLE #1 NEW LOCATION. PULL EXISTING INNERDUCTS AND F.O. CABLES INDICATED IN KEYED NOTE #8 ON SHEET T00100 THROUGH CONDUIT AND INTO HANDHOLE #1. SPLICE EXISTING F.O. CABLE TO F.O. SERVING THE EAB, SEE KEYED NOTE 3. INSTALL THE 24 STRAND F.O. CABLE FROM THE ISB TO THE LORETTO HALL DATA ROOM IN THE EXISTING SPARE INNERDUCT.
3. PROVIDE UNDERGROUND 4" PVC CONDUIT WITH (3) 1 1/4" INNERDUCTS, ONE FOR THE F.O. CABLE TO THE EAB, ONE FOR AT&T'S F.O. CABLES TO THE EAB, AND ONE SPARE. COORDINATE AT&T F.O. CABLE INSTALLATION WITH AT&T. PROVIDE PULL ROPE IN SPARE INNERDUCT.
4. PROVIDE AN UNDERGROUND 4" PVC CONDUIT WITH (3) 1 1/4" INNERDUCTS TO THE ISB MDF, ONE FOR THE F.O. CABLES TO THE ISB, ONE FOR THE COPPER CABLE TO THE ISB AND ONE SPARE. PROVIDE PULL ROPES IN SPARE INNERDUCTS.
5. INSTALL F.O. CABLE FROM THE ISB TO LORETTO HALL DATA ROOM IN EXISTING SPARE INNERDUCT.
6. EXISTING UNDERGROUND 4" PVC CONDUIT WITH (1) EXISTING INNERDUCT (WITH EXISTING F.O. CABLE INSTALLED). INSTALL (2) 1 1/4" INNERDUCTS WITH PULL STRINGS IN EXISTING 4" PVC CONDUIT. INSTALL F.O. CABLE FROM THE ISB TO THE LORETTO HALL DATA ROOM IN ONE OF THE INNERDUCTS. PROVIDE PULL ROPE IN SPARE INNERDUCT.
7. SEE "ENLARGED MDF/IT WORKROOM FLOOR PLAN" AND "HANDHOLE #6 DETAIL" ON SHEET T0201.
8. UNDERGROUND PVC CONDUITS TO THE LEVEL 01 MDF, SEE KEYED NOTE #4 ON SHEET T0201.



Webster University
Interdisciplinary Science
Building

CANNONDESIGN

1100 Clark Avenue
St. Louis, Missouri 63102
T: 314.241.6250
F: 314.241.2570

William Tao & Associates, Inc.
MER/FP Engineer
7955 Manchester Road, Suite 125
St. Louis, MO 63143
314-884-7600

David Mason & Associates, Inc.
Structural & Civil Engineer
800 South Vandeventer Avenue
St. Louis, MO 63110
314.534.1053

Faith Group
Technology
3101 S. Hanley Rd, Suite 100
St. Louis, MO 63143
314.991.2229

Kuhmann Leavitt, Inc.
Environmental Graphics & Signage
7400 Pershing Ave
St. Louis, MO 63130
314.725.6616


KWA Architects
Architecture
9721 Litzinger Road
St. Louis, MO 63124
314.962.2560

Spellman Brady & Company
Interior Designer
8251 Maryland Avenue, Suite 300
St. Louis, MO 63105
314.862.0070

SWT Design
Landscape Architect
7722 Big Bend Blvd
St. Louis, MO 63119
314.644.5700

Webb Engineering Services, Inc.
Plumbing & Fire Protection
1400 S. 3rd Street, Suite 201
St. Louis, MO 63104
314.558.0600

ISSUED FOR CONSTRUCTION (BP2) 01 MAR 2016
No. Description Date

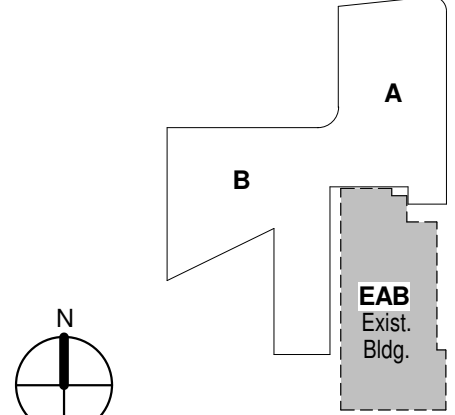

KEY PLAN

Drawing Title:

TECHNOLOGY SITE PLAN

Project No.: 04561.01 Checked by:

T0100