


CONFORMED SET

01 JUL 2016

4	ADDENDUM 2-4	24 MAY 2016
3	ADDENDUM 2-2	19 APR 2016
2	MSD SUBMITTAL	12 APR 2016
1	ADDENDUM 2-1	17 MAR 2016
-	ISSUED FOR CONSTRUCTION (BP2)	01 MAR 2016

No.	Description	Date
-----	-------------	------

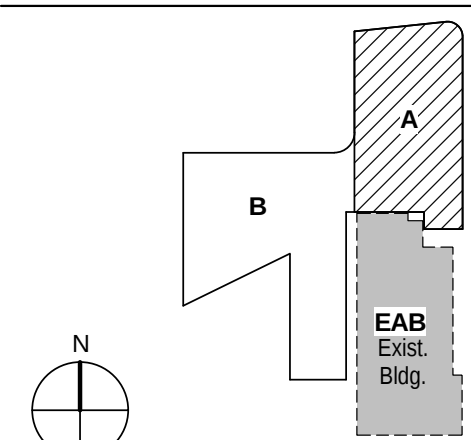


KEY PLAN

LEVEL 0 AREA A
UNDERFLOOR PLAN -
PLUMBING

Project No.: 04561.01

Checked by:

P0010

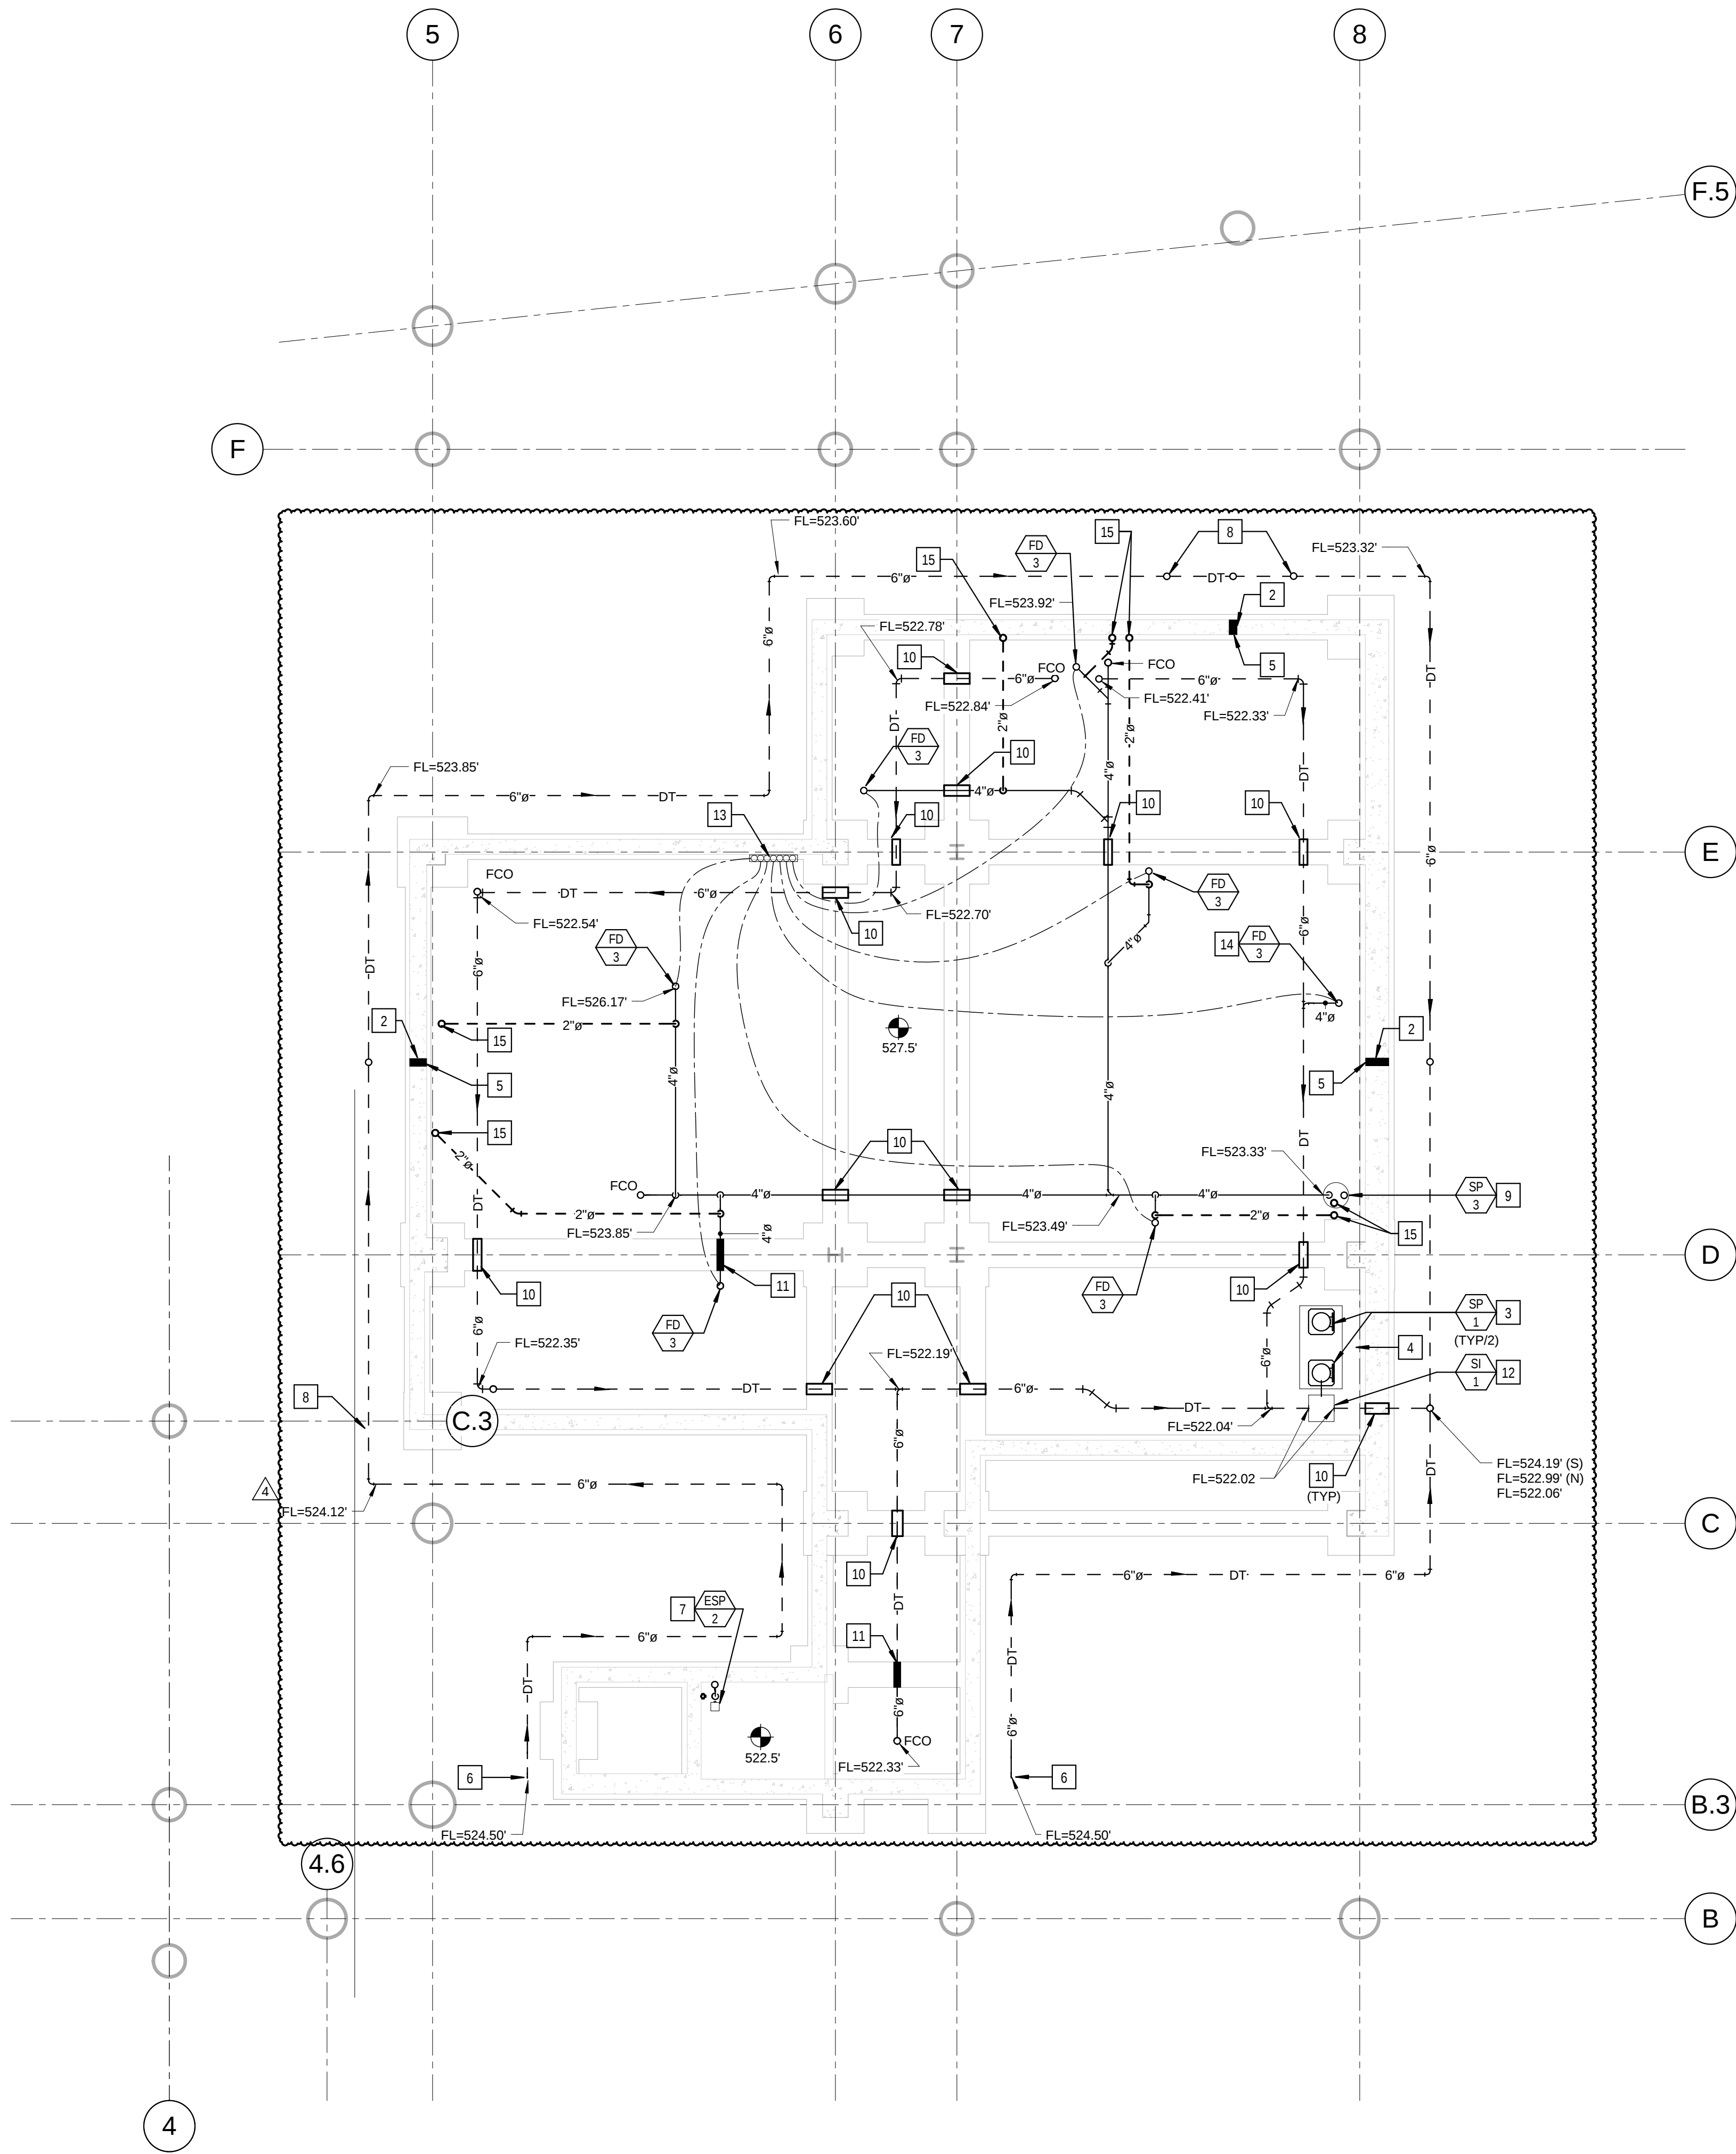

1 LEVEL 0 AREA A UNDER FLOOR PIPING PLAN - PLUMBING
1/8" = 1'-0"

NOTES:

FURNISH AND INSTALL 6" PERFORATED SCHEDULE 40 PVC DRAIN TILE ALONG PERIMETER FOUNDATION WALLS AND BELOW BASEMENT FLOOR SLAB AS INDICATED. SLOPE DRAIN AT 0.50% MINIMUM. ADJUST EXACT LOCATION AND ROUTING AS NECESSARY TO AVOID PIERS AND ANY OTHER STRUCTURAL ELEMENTS.

FURNISH AND INSTALL SUMP PUMP, SAND INTERCEPTOR AND FLOOR DRAINS PER MSD'S STANDARD DETAIL FIGURE 3-2 IN THE LATEST PUBLISHED RULES AND REGULATIONS AND ENGINEERING DESIGN REQUIREMENTS FOR SANITARY SEWER AND STORMWATER DRAINAGE FACILITIES.