


CONFORMED SET

01 JUL 2016

ISSUED FOR CONSTRUCTION (BP2) 01 MAR 2016

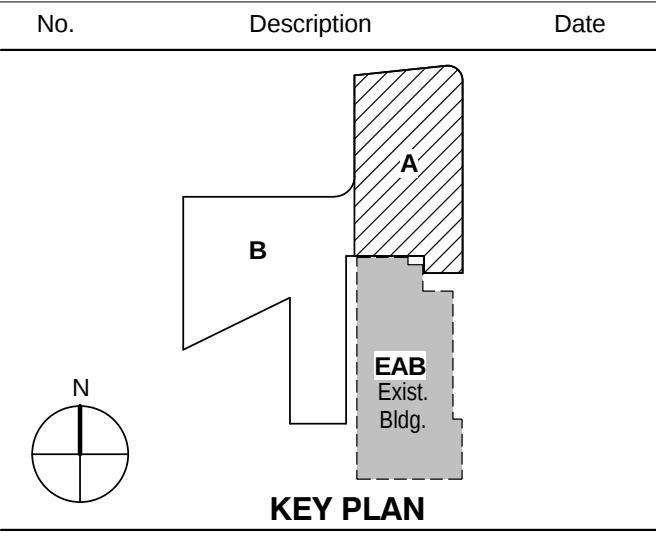


Drawing Title:

LEVEL 0 AREA A FLOOR  
PLAN - LABORATORY  
DEIONIZED WATER  
SYSTEM

Project No.: 04561.01

Checked by:

P0300.A

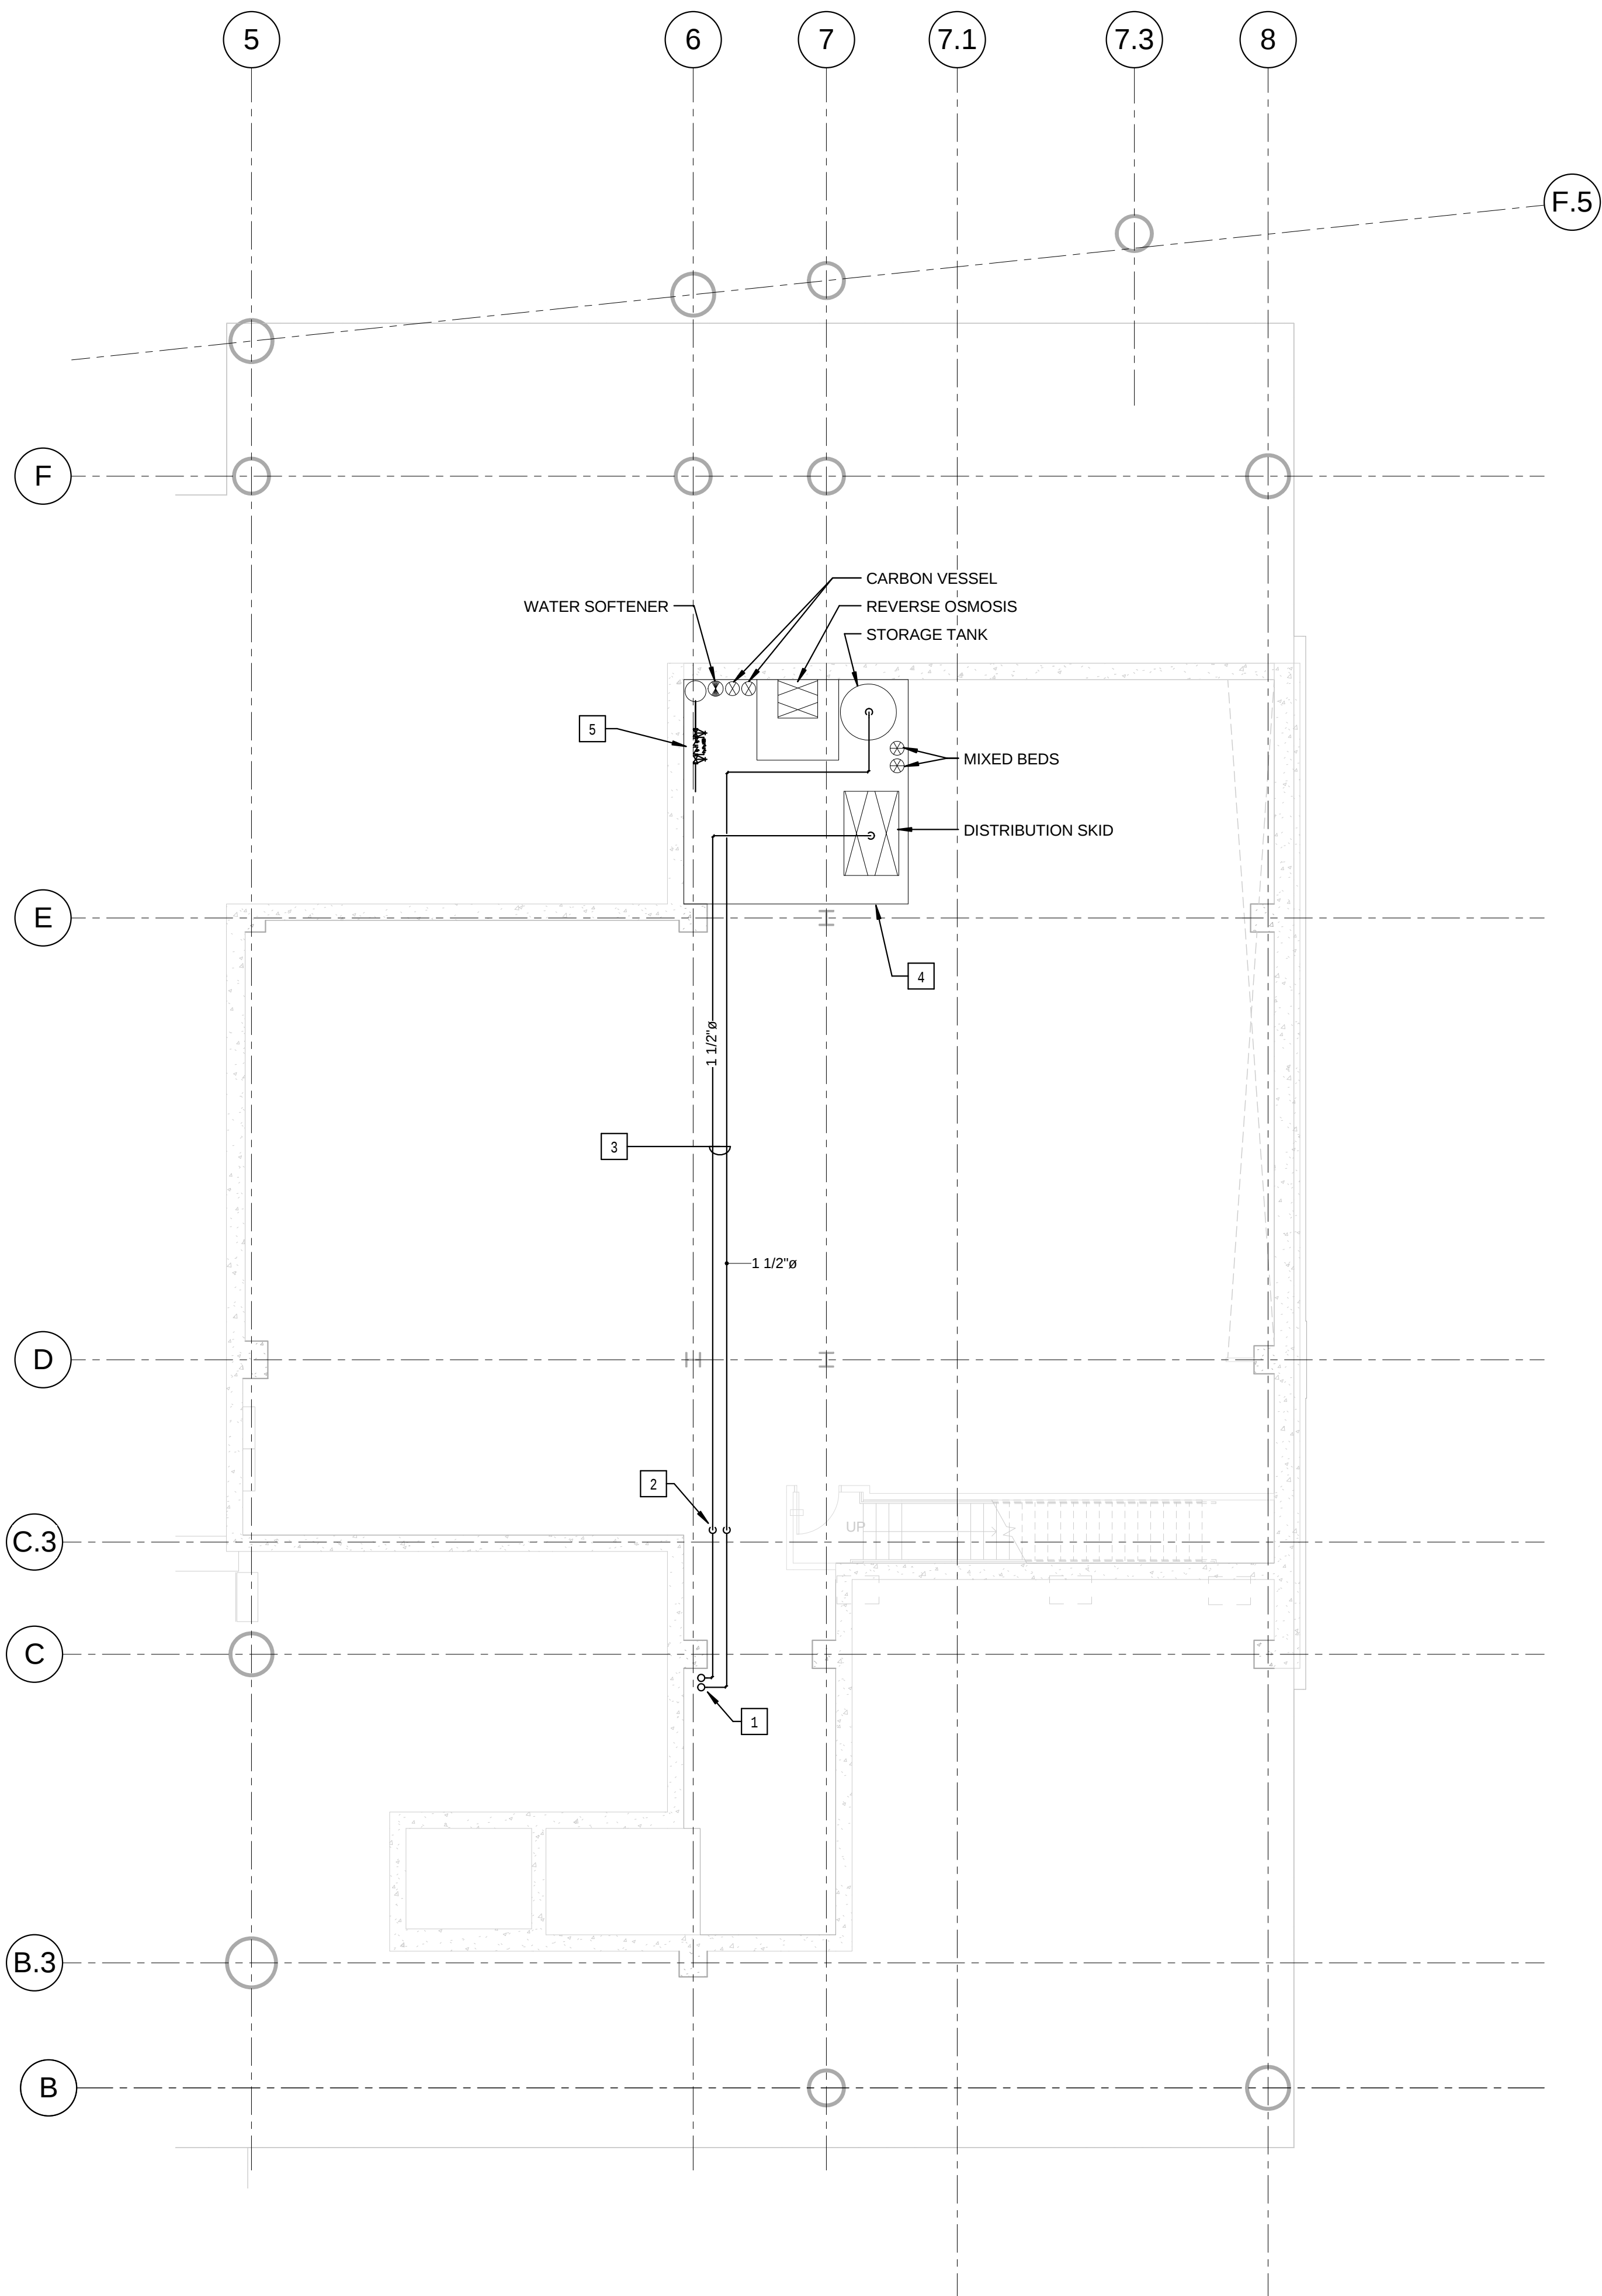

1 LEVEL 0 AREA A FLOOR PLAN - LABORATORY DEIONIZED WATER SYSTEM  
1/8" = 1'-0"

KEYED NOTES: (THIS SHEET ONLY)

- 1 DEIONIZED WATER RISERS UP TO LEVEL 1. REFER TO DRAWING P0301A FOR CONTINUATION.
- 2 DROP PIPING TO BOTTOM OF STRUCTURAL MEMBER. HOLD PIPING TIGHT TO BOTTOM OF STEEL.
- 3 RUN PIPING AT BOTTOM OF STRUCTURAL STEEL CROSS MEMBERS. COORDINATE INSTALLATION AND ROUTING WITH OTHER TRADES.
- 4 DEIONIZED WATER SYSTEM. REFER TO DRAWING P0503, DETAIL 3/P0503 FOR REFERENCE PIPING DIAGRAM. ACTUAL PIPING LAYOUT AND CONFIGURATION MAY VARY WITH DIFFERENT MANUFACTURERS. CONTRACTOR TO COORDINATE INSTALLATION WITH FINAL EQUIPMENT SELECTION.
- 5 BACKFLOW PREVENTER (BFP-3) SHOWN FOR REFERENCE. REFER TO DRAWING P011.