



PRODUCT SUBMITTAL

Series 200 Ladder Mesh (For Single Wyth Wall)

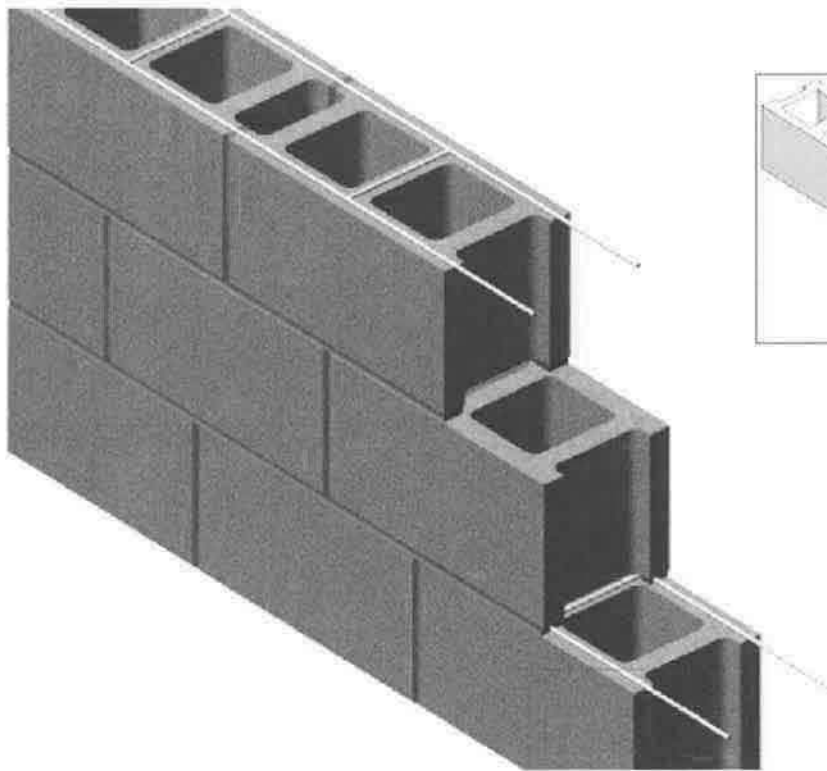


16" O.C. cross rods allow core clearance.

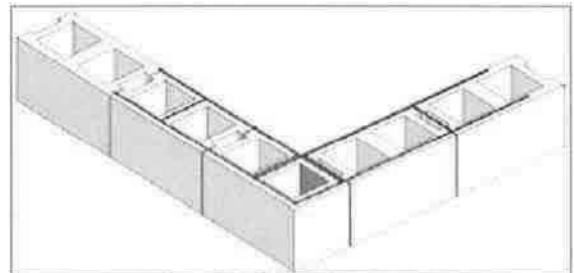

PREFABRICATED CORNER

Corners & Tee's
32" Standard Lengths

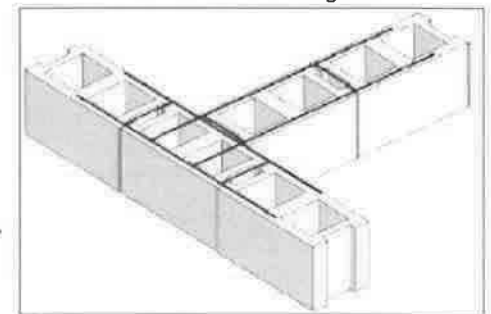

PREFABRICATED TEE

MATERIAL CONFORMANCE

ASTM A82 / A82M - (Cold drawn steel wire)

Tensile Strength - 80,000 psi

Yield Point - 70,000 psi

ASTM A951 / A951M-06 - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)

ACI / ASCE 530 - (Building code requirements for masonry structures)

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating: **ASTM A153 /**

A153M-B2 (1.50 oz per sq ft)

Stainless Steel **ASTM 580 / 580M Type 304** (Type 316 available on special orders)



WIRE Recycled Content:

Mill Galvanized & Hot Dip,
87% Post-Consumer
13% Post Industrial / Pre-Consumer,
Stainless Steel,
60% Post Consumer
V O C Content - 0%

SIZES / FINISHES

WIRE SIZE:

- ☒ Standard
☐ Heavy Duty
☐ Extra Heavy Duty

Side Rods

9 Gauge (.148 in)
3/16" (.187 in)
3/16" (.187 in)

Cross Rods

9 Gauge
9 Gauge
3/16"

CMU SIZE:

- ☐ 4" ☐ 6" ☒ 8" ☐ 10" ☐ 12" ☐ 14" ☐ 16"

FINISHES:

- ☐ Mill Galvanized ☒ Hot Dip Galvanized ☐ Stainless Steel

Corporate Office: 400 Rountree Rd Charlotte, NC 28217

TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113

TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113

SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

PROJECT NAME	
ADDRESS	
NUMBER	
OWNER	
ARCHITECT / ENGINEER	
SUBMITTED BY	
CONTRACTOR / CM SUBMITTAL NO.	CANNON DESIGN SUBMITTAL NO.
DRAWING / DETAIL REFERENCE	SPECIFICATION SECTION / PARAGRAPH
MANUFACTURER / SUPPLIER	ITEM / PRODUCT ID
REQUIRED DATE	PRIORITY
☐ CRITICAL	

To be completed by Reviewer

CANNON DESIGN SUBMITTAL NUMBER
RECEIVED DATE

- ☐ **A. No Exceptions Taken**
No further review of submittal is required.
- ☐ **B. Make Corrections Noted**
Incorporate corrections in work;
resubmission is not required.
- ☐ **C. Revise and Resubmit**
Revise as noted, and resubmit for review.
- ☐ **D. Rejected**
Submittal is not in compliance with Contract Documents;
provide new submittal.
- ☐ **E. For Record / Information Only**
Submittal was reviewed for Record / Information
purposes only.
- ☐ **F. Not Required for Review**
Submittal is not required by Contract Documents
and has not been reviewed.

Review is for conformance with the design concept of this project and for general compliance with contract documents. Contractor is responsible for quantities, dimensions and compliance with contract documents and for information that pertains to fabrication processes, construction techniques and coordination of this work with all trades which will be affected thereby. This review is null and void if submittal deviates from contract documents and does not indicate or note deviations.

ITEM BEING SUBMITTED (check only one)

- ☐ Shop Drawings ☐ Certification / Qualifications ☐ Coordination Drawing
☐ Samples ☐ Record Documents ☐ Calculations
 (_____ copies) ☐ Product Data ☐ Schedules
☐ LEED Submittal ☐ O&M Manuals
☐ Other _____

ITEM BEING SUBMITTED FOR (check only one)

- ☐ Action ☐ Information Only ☐ Record

REMARKS OR DEVIATIONS

CONTRACTOR / CM CERTIFICATION
(SUBMITTALS NOT CERTIFIED WILL BE RETURNED WITHOUT REVIEW)



PARIC CORPORATION
SUBMITTAL STAMP

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

Subcontractor remains responsible for dimensions, quantities, coordination with other trades and compliance with contract documents.

Ry:

By:
Devin D. Gates

REVIEWED BY	DATE

A/E COMMENTS

- ☐
- See attached sheet(s) for additional comments

REVIEWED BY	DATE

TRANSMITTAL LETTER



Leonard Masonry, Inc.

5925 Fee Fee Road
St. Louis, MO 63042

Transmittal # **945-05**

Date: 9/8/2016
Phone: (314) 731-5500
Fax: (314) 731-3366

Project Name: Webster University Interdisciplinary Science Building

Project #: 945

To: Paric Corporation
Attn: Devin Gates
77 Westport Plaza Drive
Suite 250
St. Louis, MO 63146

Items listed are being sent

- ☒ Enclosed
☐ Under Separate Cover
☐ Via

SUBJECT: Submittal 945-05, Rev #0 Interior Masonry Material

Phone: (636) 561-9500 **Fax:** (636) 561-9501

We are transmitting the following to you:

- ☒ Product Data
☐ Architectural Drawings
☐ Engineering Drawings
☐ Samples
☐ Letters
☐ Change Order Requests

- ☒ Submittals: Submittal 945-05, Rev #0 Interior Masonry Material
☐ Shop Drawings
☐ Specifications
☐ O & M Manuals
☐ Prints
☐ Plans
☐ Addenda
☐

Submittal: Interior Masonry Materials - Rev#0

Code/Spec	Copies	For	Product #	Summary Item
	1	Approval		Lightweight block certification
	1	Approval		Type S mortar certification
	1	Approval		Masonry grout certification
	1	Approval		Horizontal reinforcing product data

Remarks:

COPIES TO:

By: Ken Westhoff
Project Manager

Received by: _____ Date: _____