

PRODUCT SUBMITTAL


Mortar Net[®]

DESCRIPTION

MORTAR NET[®] For traditional brick masonry cavity-wall construction. Made of tough polyester mesh, its patented "dovetail" shape captures mortar droppings on two levels so they can't form a solid dam. In addition, its 90% open-weave mesh lets water flow, unobstructed, to weep holes and lets air circulate freely within the cavity.

SHORT FORM SPEC

Provide polyester mesh dovetail configuration to maintain airflow and drainage while suspending mortar droppings at unequal heights. Provide one or more thickness as required to fill cavity width. Install per manufacturer's instructions.

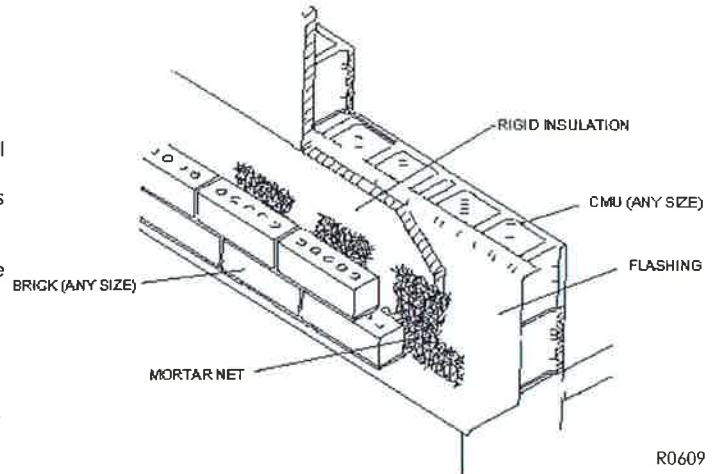

R0609

Product: Subject to compliance with requirements, provide "Mortar Net[®]" by Mortar Net USA, Ltd.

MANUFACTURER

Mortar Net USA, Ltd.
326 Melton Road, Burns Harbor, IN 46304
Telephone: (800) 664-6638
Fax: (219) 787-5088
Email: info@mortarnet.com
Website: www.MortarNet.com

Specifier Note: The Mortar Net[®] is manufactured of nylon, high density polyethylene (HDPE) or polyester, fabricated in a 90% open mesh, 2", 1" or 0.4" (51, 25.4, or 10.2 mm) thick. It has no negative reaction to PVC, polyethylene, polystyrenes, copper, lead, rubberized asphalt, or stainless steel, and will not degrade or decompose over the life of the building. It will not absorb or trap moisture and water, and is treated with an antimicrobial and will not support mold or fungus. The Mortar Net[®] is patented, US Patent Reissue #36676.

SUBSTITUTIONS

No substitutions permitted

- ☐ Mortar Net MN 10-4: 10" (254 mm) high x 0.4" (10.2 mm) thick material.
- ☐ Mortar Net MN 10-1: 10" (254 mm) high x 1" (25.4 mm) thick material.
- ☐ Mortar Net MN 10-2: 10" (254 mm) high x 2" (51 mm) thick material.

DATE: _____

PROJECT: _____

FIRM: _____ PHONE: _____

APPROVAL: _____ DATE: _____

GENERAL CONTRACTOR: _____

BID DATE: _____

COMMENTS: _____

SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

PROJECT NAME	
ADDRESS	
NUMBER	
OWNER	
ARCHITECT / ENGINEER	
SUBMITTED BY	
CONTRACTOR / CM SUBMITTAL NO.	CANNON DESIGN SUBMITTAL NO.
DRAWING / DETAIL REFERENCE	SPECIFICATION SECTION / PARAGRAPH
MANUFACTURER / SUPPLIER	ITEM / PRODUCT ID
REQUIRED DATE	PRIORITY
CRITICAL	☐

To be completed by Reviewer

CANNON DESIGN SUBMITTAL NUMBER
RECEIVED DATE

- ☐ **A. No Exceptions Taken**
No further review of submittal is required.
- ☐ **B. Make Corrections Noted**
Incorporate corrections in work;
resubmission is not required.
- ☐ **C. Revise and Resubmit**
Revise as noted, and resubmit for review.
- ☐ **D. Rejected**
Submittal is not in compliance with Contract Documents;
provide new submittal.
- ☐ **E. For Record / Information Only**
Submittal was reviewed for Record / Information
purposes only.
- ☐ **F. Not Required for Review**
Submittal is not required by Contract Documents
and has not been reviewed.

Review is for conformance with the design concept of this project and for general compliance with contract documents. Contractor is responsible for quantities, dimensions and compliance with contract documents and for information that pertains to fabrication processes, construction techniques and coordination of this work with all trades which will be affected thereby. This review is null and void if submittal deviates from contract documents and does not indicate or note deviations.

ITEM BEING SUBMITTED (check only one)

- ☐ Shop Drawings ☐ Certification / Qualifications ☐ Coordination Drawing
☐ Samples ☐ Record Documents ☐ Calculations
 (_____ copies) ☐ Product Data ☐ Schedules
☐ LEED Submittal ☐ O&M Manuals
☐ Other _____

ITEM BEING SUBMITTED FOR (check only one)

- ☐ Action ☐ Information Only ☐ Record

REMARKS OR DEVIATIONS

CONTRACTOR / CM CERTIFICATION
(SUBMITTALS NOT CERTIFIED WILL BE RETURNED WITHOUT REVIEW)



PARIC CORPORATION
SUBMITTAL STAMP

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

Subcontractor remains responsible for dimensions, quantities, coordination with other trades and compliance with contract documents.

Ry:

Devin D. Gates

REVIEWED BY	DATE

A/E COMMENTS

- ☐
- See attached sheet(s) for additional comments

REVIEWED BY	DATE



77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0081

Paric Corporation

PROJECT: 15051-Webster University Interdisciplinary Science Building

DATE: 06/13/2016

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

RE: Masonry product data

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☒ Shop Drawings	☒ Approval	☒ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	SENT VIA:	☐ Returned
☐ Specifications	☐ Attached	☐ Returned for Corrections
☐ Other:	☐ Separate Cover Via:	☐ Due Date:

Item	Package	Code	Rev.	Copies	Date	Description	Status
Submittal		044300-007	1		06/13/2016	Masonry product data	Submitted


NOTES:

CC: Paric Corporation, Kathy Bathe

Project Coordinator: Paric Corporation, Kathy Bathe

Signed: _____
Devin Gates

TRANSMITTAL LETTER



Leonard Masonry, Inc.

5925 Fee Fee Road
St. Louis, MO 63042

Transmittal # **945-01**

Date: 6/10/2016
Phone: (314) 731-5500
Fax: (314) 731-3366

Project Name: Webster University Interdisciplinary Science Building

Project #: 945

To: Paric Corporation
Attn: Devin Gates
77 Westport Plaza Drive
Suite 250
St. Louis, MO 63146

Items listed are being sent

- ☒ Enclosed
☐ Under Separate Cover
☐ Via

SUBJECT: Submittal 945-01, Rev #0 Masonry materials

Phone: (636) 561-9500 **Fax:** (636) 561-9501

We are transmitting the following to you:

- ☒ Product Data
☐ Architectural Drawings
☐ Engineering Drawings
☐ Samples
☐ Letters
☐ Change Order Requests

- ☒ Submittals: Submittal 945-01, Rev #0 Masonry materials
☐ Shop Drawings
☐ Specifications
☐ O & M Manuals
☐ Prints
☐ Plans
☐ Addenda
☐

Submittal: Masonry materials - Rev#0

Code/Spec	Copies	For	Product #	Summary Item
	1	Approval		Face brick test report
	1	Approval		Type N mortar certification
	1	Approval		Mortar color product data
	1	Approval		Veneer anchor product data
	1	Approval		Weep vent product data
	1	Approval		Cavity drainage material product data
	1	Approval		Termination bar product data
	1	Approval		Cavity-wall insulation product data
	1	Approval		Masonry cleaner product data

Remarks:

COPIES TO:

By: Ken Westhoff
Project Manager

Received by:

Date: