

Speed Strips (CP 767)

Speed Plugs (CP 777)

Product description

- CP 777: Pre-formed mineral wool plugs for 1.5", 2" and 3" decks
- CP 767: Pre-formed mineral wool strips suitable for joint applications

Product features


- Pre-cut to industry standard size decking flutes
- Reduces material waste
- 3 sizes available
- Pre-cut — leaves no gaps or voids
- Smooth surface provides cost effective spray coverage
- Safe to use — no asbestos/inorganic, will not mildew
- Up to 60% faster than castle cutting!

Areas of application

- Top-of-wall

Tested and approved

- UL Classified when used in conjunction with CP 606 Flexible Firestop Sealant, CP 601S Elastomeric Firestop Sealant, CP 672 Speed Spray, or CFS-SP WB Firestop Joint Spray

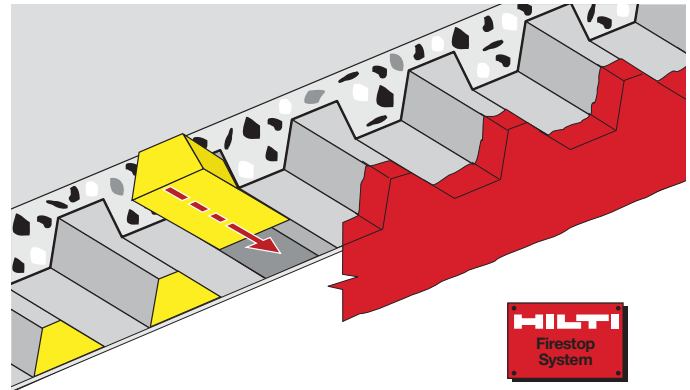


Technical Data

CP 767 and CP 777

Tested in accordance with

- UL 2079
- ASTM E 1966
- ASTM C G12 Type I-IUB



Saves time and money!

Castle cutting	50 MINUTES
Conventional mineral wool	35 MINUTES
Hilti speed plugs	20 MINUTES

60% Faster than castle cutting

43% Faster than conventional mineral wool

*Based upon 40 linear feet of installation. Actual results may vary.

Installation instructions for CP 777

Notice

- Before handling, read Material Safety Data Sheet and product label for safe usage and health information.
- Instructions below are general guidelines — always refer to the applicable drawing in the UL Fire Resistance Directory or Hilti Firestop Systems Guide for complete installation information



Easy one step installation — simply cut to length and install.



Full coverage pre-cut flute configuration leaves no gaps or voids.



Superior finish smooth surface allows quick and cost effective coverage with Hilti CFS-SP WB Firestop Joint Spray.



Easy to utilize — Speed Strips in joints between wall substrate and bottom of deck. Compress per UL System.

Hilti. Outperform. Outlast.

Hilti, Inc. (U.S.) 1-800-879-8000 • www.us.hilti.com • en español 1-800-879-5000 • Hilti Firestop Systems Guide



Hilti Firestop
Saving lives
through innovation
and education

CERTIFICATE OF COMPLIANCE

Certificate Number 20160829-R13081
Report Reference R13081
Issue Date 2016-August-29

Issued to: Hilti Construction Chemicals, Div of Hilti Inc.
7250 Dallas Pky, Legacy Tower Ste 1000
Plano, TX 75024 USA

**This is to certify that
representative samples of**

Forming Materials
Forming Materials Certified for Canada

CP767 Speed Strips and CP777 Speed Plugs Speed Strips
for use in Joint Systems as currently described in the UL Fire
Resistance Directory and in the Products Certified for
Canada Directory.

Have been investigated by UL in accordance with the
Standard(s) indicated on this Certificate.

Standard(s) for Safety:

ANSI/UL 1479, "Fire Tests of Through-Penetration
Firestops,"
CAN/ULC-S115, "Standard Method of Fire Tests of Firestop
Systems."

Additional Information:

See the UL Online Certifications Directory at
www.ul.com/database for additional information

Only those products bearing the UL Certification Mark should be considered as being covered by UL's
Certification and Follow-Up Service.

Look for the UL Certification Mark on the product.



Bruce Mahrenholz, Director North American Certification Program

UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please
contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>



Speed Strips (CP 767)

Speed Plugs (CP 777)

Product description

- CP 777: Pre-formed mineral wool plugs for 1.5", 2" and 3" decks
- CP 767: Pre-formed mineral wool strips suitable for joint applications

Product features


- Pre-cut to industry standard size decking flutes
- Reduces material waste
- 3 sizes available
- Pre-cut — leaves no gaps or voids
- Smooth surface provides cost effective spray coverage
- Safe to use — no asbestos/inorganic, will not mildew
- Up to 60% faster than castle cutting!

Areas of application

- Top-of-wall

Tested and approved

- UL Classified when used in conjunction with CP 606 Flexible Firestop Sealant, CP 601S Elastomeric Firestop Sealant, CP 672 Speed Spray, or CFS-SP WB Firestop Joint Spray

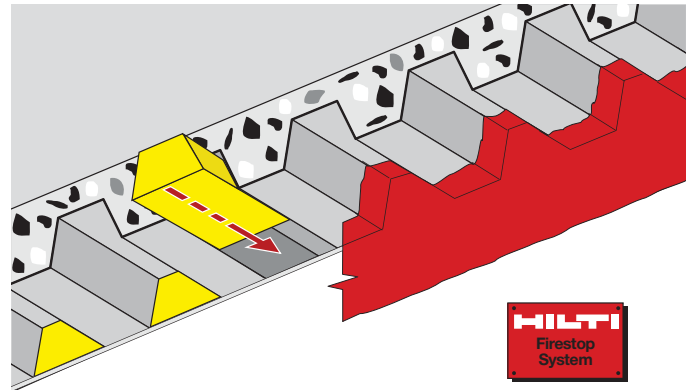


Technical Data

CP 767 and CP 777

Tested in accordance with

- UL 2079
- ASTM E 1966
- ASTM C G12 Type I-IUB



Saves time and money!

Castle cutting	50 MINUTES
Conventional mineral wool	35 MINUTES
Hilti speed plugs	20 MINUTES

60% Faster than castle cutting

43% Faster than conventional mineral wool

*Based upon 40 linear feet of installation. Actual results may vary.

Installation instructions for CP 777

Notice

- Before handling, read Material Safety Data Sheet and product label for safe usage and health information.
- Instructions below are general guidelines — always refer to the applicable drawing in the UL Fire Resistance Directory or Hilti Firestop Systems Guide for complete installation information



Easy one step installation — simply cut to length and install.



Full coverage pre-cut flute configuration leaves no gaps or voids.



Superior finish smooth surface allows quick and cost effective coverage with Hilti CFS-SP WB Firestop Joint Spray.



Easy to utilize — Speed Strips in joints between wall substrate and bottom of deck. Compress per UL System.

Hilti. Outperform. Outlast.

Hilti, Inc. (U.S.) 1-800-879-8000 • www.us.hilti.com • en español 1-800-879-5000 • Hilti Firestop Systems Guide

Hilti Firestop
Saving lives
through innovation
and education

CERTIFICATE OF COMPLIANCE

Certificate Number 20160829-R13081
Report Reference R13081
Issue Date 2016-August-29

Issued to: Hilti Construction Chemicals, Div of Hilti Inc.
7250 Dallas Pky, Legacy Tower Ste 1000
Plano, TX 75024 USA

**This is to certify that
representative samples of**

Forming Materials
Forming Materials Certified for Canada

CP767 Speed Strips and CP777 Speed Plugs Speed Strips
for use in Joint Systems as currently described in the UL Fire
Resistance Directory and in the Products Certified for
Canada Directory.

Have been investigated by UL in accordance with the
Standard(s) indicated on this Certificate.

Standard(s) for Safety:

ANSI/UL 1479, "Fire Tests of Through-Penetration
Firestops,"
CAN/ULC-S115, "Standard Method of Fire Tests of Firestop
Systems."

Additional Information:

See the UL Online Certifications Directory at
www.ul.com/database for additional information

Only those products bearing the UL Certification Mark should be considered as being covered by UL's
Certification and Follow-Up Service.

Look for the UL Certification Mark on the product.



Bruce Mahrenholz, Director North American Certification Program

UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please
contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>



SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

WEBSTER UNIVERSITY ISB

PROJECT NAME

8274 BIG BEND BLVD

ADDRESS

NUMBER

WEBSTER UNIVERSITY

OWNER

CANNON DESIGN

ARCHITECT / ENGINEER

DEVIN D GATES

SUBMITTED BY

078413-001

CONTRACTOR / CM SUBMITTAL NO.

CANNON DESIGN SUBMITTAL NO.

DRAWING / DETAIL REFERENCE

078413

SPECIFICATION SECTION / PARAGRAPH

MANUFACTURER / SUPPLIER

ITEM / PRODUCT ID

REQUIRED DATE

PRIORITY

☐

CRITICAL

ITEM BEING SUBMITTED (check only one)

- ☐ Shop Drawings
☐ Samples
☐ (____ copies)
☐ LEED Submittal
☐ Other _____
- ☐ Certification / Qualifications
☐ Record Documents
☐ Product Data
- ☐ Coordination Drawing
☐ Calculations
☐ Schedules
☐ O&M Manuals

ITEM BEING SUBMITTED FOR (check only one)

- ☒ Action
☐ Information Only
☐ Record

REMARKS OR DEVIATIONS

Resubmitted with installer qualifications. Products have been selected by qualified installer. LEED documentation provided. Entire submittal package provided again as this is what was "selected" by installer.

CONTRACTOR / CM CERTIFICATION
(SUBMITTALS NOT CERTIFIED WILL BE RETURNED WITHOUT REVIEW)



PARIC CORPORATION
SUBMITTAL STAMP

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

Subcontractor remains responsible for dimensions, quantities, coordination with other trades and compliance with contract documents.

By:

Devin D. Gates

DEVIN D GATES

REVIEWED BY

02/12/17

DATE

To be completed by Reviewer

07 8413-001 REV002

CANNON DESIGN SUBMITTAL NUMBER

2/13/17

RECEIVED DATE

- ☐ A. No Exceptions Taken
 No further review of submittal is required.
- ☒ B. Make Corrections Noted
 Incorporate corrections in work; resubmission is not required.
- ☐ C. Revise and Resubmit
 Revise as noted, and resubmit for review.
- ☐ D. Rejected
 Submittal is not in compliance with Contract Documents; provide new submittal.
- ☐ E. For Record / Information Only
 Submittal was reviewed for Record / Information purposes only.
- ☐ F. Not Required for Review
 Submittal is not required by Contract Documents and has not been reviewed.

Review is for conformance with the design concept of this project and for general compliance with contract documents. Contractor is responsible for quantities, dimensions and compliance with contract documents and for information that pertains to fabrication processes, construction techniques and coordination of this work with all trades which will be affected thereby. This review is null and void if submittal deviates from contract documents and does not indicate or note deviations.

A/E COMMENTS

☐ See attached sheet(s) for additional comments

See markups.

Provide Identification per specification 078413, 3.4.

Kelvin Patel

REVIEWED BY

Digitally signed by Kelvin Patel
DN: cn=Kelvin Patel, o=Cannon Design, ou=Architect, email=K-Patel@cannondesign.com, c=US
Date: 2017.02.22 18:27:43 -06'00'

2/22/17

DATE

SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

PROJECT NAME

ADDRESS

NUMBER

OWNER

ARCHITECT / ENGINEER

SUBMITTED BY

CONTRACTOR / CM SUBMITTAL NO.

DRAWING / DETAIL REFERENCE

MANUFACTURER / SUPPLIER

REQUIRED DATE

ITEM BEING SUBMITTED (check only one)

ITEM BEING SUBMITTED FOR (check only one)

REMARKS OR DEVIATIONS

CONTRACTOR / CM CERTIFICATION

PARIC CORPORATION

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

By: Devin D. Gates

REVIEWED BY

DATE

To be completed by Reviewer

CANNON DESIGN SUBMITTAL NUMBER

RECEIVED DATE

A. No Exceptions Taken

B. Make Corrections Noted

C. Revise and Resubmit

D. Rejected

E. For Record / Information Only

F. Not Required for Review

Review is for conformance with the design concept of this project and for

general compliance with contract documents. Contractor is responsible for

quantities, dimensions and compliance with contract documents and for

information that pertains to fabrication processes, construction techniques

and coordination of this work with all trades which will be affected thereby.

This review is null and void if submittal deviates from contract documents

and does not indicate or note deviations.

A/E COMMENTS

See attached sheet(s) for additional comments

REVIEWED BY

DATE