


Cores


Full Size Interchangeable Core Cylinders for Exit Devices, Aluminum Door, etc.

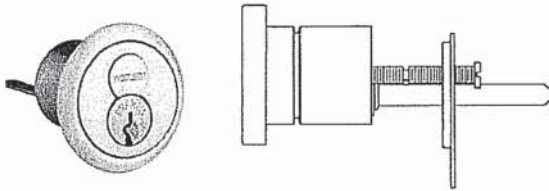

Interchangeable Core Rim Cylinders for Exit Devices

Number	Core Mechanism
20-057	Conventional core
20-757	Primus core
20-757-XP	Primus XP core
20-079	Housing only, less core

Available 605, 606, 609, 612, 613, 619, 625 and 626 finish.



Cylinders for Adams Rite MS and 4700 Series Lori 4500 Series and Corbin Russwin DL3000 Series

Number	Core Mechanism	Collar
26-098	Conventional core	Compression ring & spring
20-062	Conventional core	$\frac{3}{16}$ " + $\frac{3}{8}$ " blocking rings
20-766	Primus core	$\frac{3}{16}$ " + $\frac{3}{8}$ " blocking rings
20-766-XP	Primus XP core	$\frac{3}{16}$ " + $\frac{3}{8}$ " blocking rings
20-060	Housing less core	None

These cylinders include set screw pack B220-050 for Adams Rite locks.



K510-711
Adams Rite
MS Cam

Cylinders for Adams Rite 4070 Series Deadlocks

Number	Core Mechanism	Collar
20-091	Conventional core	$\frac{3}{16}$ " + $\frac{3}{8}$ " blocking rings
20-722	Primus core	$\frac{3}{16}$ " + $\frac{3}{8}$ " blocking rings
20-722-XP	Primus XP core	$\frac{3}{16}$ " + $\frac{3}{8}$ " blocking rings
20-090	Housing less core	None



B520-378
Adams Rite
4070 Cam

- Notes
1. Mortise cylinders available 605, 606, 609, 612, 613, 619, 625, and 626 finish. Cores furnished 606 and 626 only.
 2. To differentiate between Classic and Everest 29, specify keyway. Example: C or CP (Classic), S123 (Everest 29).
 3. All cylinders are $1\frac{1}{2}$ " long.
 4. Specify LKB if 0-bitted Primus XP cylinders are required less key blanks.

Hardware

Manufacturer's

Accurate Lock, Doug Mockett, Glynn Johnson,
Ives, LCN, Brio, Schlage, Von Duprin, Zero

Hardware Finish

32D Satin Stainless Steel, 26D Satin Chrome,
Aluminum



PARIC
EXPERIENCE. EXCELLENCE.

77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0222

Paric Corporation

PROJECT: 15051-Webster University Interdisciplinary Science Building

DATE: 09/12/2016

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

RE: Hardware Product Data

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings	☒ Approval	☐ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	SENT VIA:	☐ Returned
☐ Specifications	☐ Attached	☐ Returned for Corrections
☒ Other: Product Data	☐ Separate Cover Via:	☐ Due Date:

Item	Package	Code	Rev.	Copies	Date	Description	Status
Submittal		087100.03-002	1		09/12/2016	Hardware Product Data	Submitted

NOTES:

CC:

Signed: _____
Devin Gates