CertainTeed SAINT-GOBAIN Ceilings

PERFORMA®

Rx Symphony® *m*

VOC Compliant

LOW VOC

$$$$

LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content Pre: **62%** | Post: **0%**

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

Recycled Content

EPD Available

Health Product DECLARATION

HPD Available

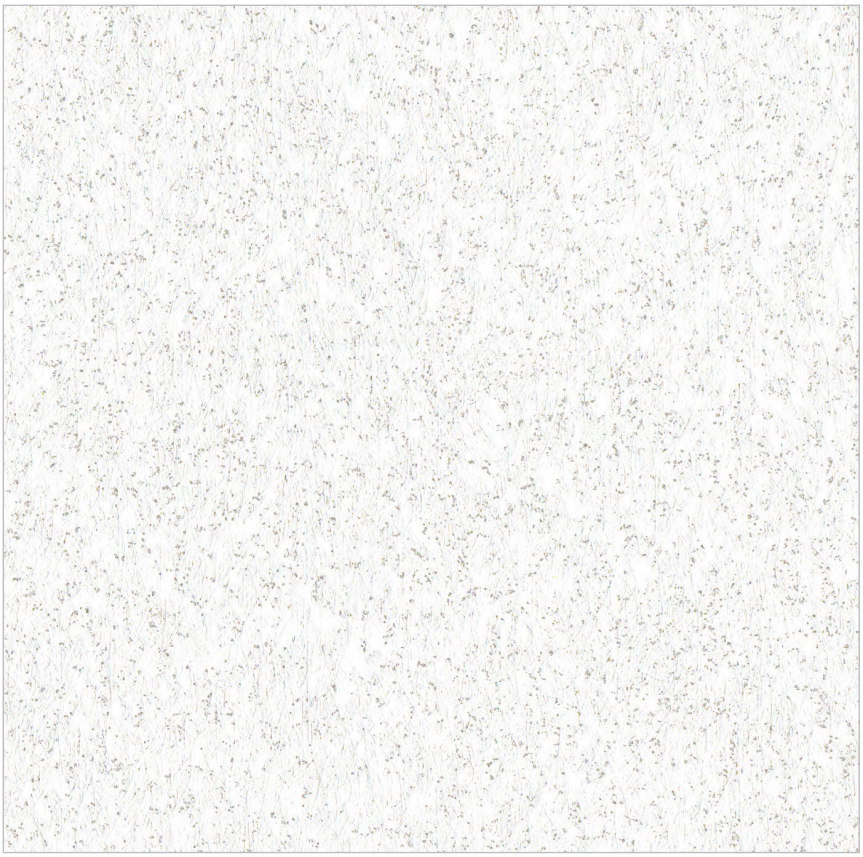

RXS Finish

FEATURES & BENEFITS

- Superior noise reduction to maximize inter-zone attenuation
- Outstanding acoustical value, high light reflectance and humidity resistance
- Exceptional durability
- Superior stain resistance and water repellency
- Washable with most sanitizing solutions and wash tested to 2,000 wash cycles and 500 scrub cycles
- Exceeds FGI Guidelines for cleanability and acoustic performance in most healthcare applications
- Satisfies USDA/FSIS guidelines for sanitary applications (commercial kitchens)
- Approved for use in federally registered Canadian food establishments
- Health Product Declaration (HPD) available for this product
- Certified clean room component to ISO Class 3 (Highest among comparable products)

APPLICATIONS

- Patient Rooms
- Emergency Rooms
- Lavatories and Restrooms
- Treatment Rooms
- Corridors
- Kitchen / Food Prep Areas
- Nurses' Stations
- Semi-Restricted Surgical Areas
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS



Trim 15/16 Grid

Reveal Beveled 15/16 Grid

Narrow Reveal Corner Bevel 9/16 Grid

Narrow Reveal Corner Bevel 9/16 Grid Bolt Slot

APC-3B

ATTRIBUTES

RX SYMPHONY® M	DIMENSIONS (INCHES)	EDGE DETAIL	NRC	CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	WASHABLE WITH SANITIZING CHEMICALS	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
1222-RXS-1	24 x 24 x 3/4	Trim	0.70	35	Yes	Yes	Yes	Bioshield	0.90	Yes	Yes	Class A	Certified	62%
1222b-RXS-1	24 x 24 x 3/4	Reveal	0.70	35	Yes	Yes	Yes	Bioshield	0.90	Yes	Yes	Class A	Certified	62%
1222f-RXS-1	24 x 24 x 3/4	Narrow Reveal	0.70	35	Yes	Yes	Yes	Bioshield	0.90	Yes	Yes	Class A	Certified	62%
1220-RXS-1	24 x 24 x 3/4	Trim	0.70	35	Yes	Yes	Yes	Bioshield	0.90	Yes	Yes	Class A	Certified	62%
1220b-RXS-1	24 x 24 x 3/4	Reveal	0.70	35	Yes	Yes	Yes	Bioshield	0.90	Yes	Yes	Class A	Certified	62%
1220f-RXS-1	24 x 48 x 3/4	Narrow Reveal	0.70	35	Yes	Yes	Yes	Bioshield	0.90	Yes	Yes	Class A	Certified	62%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Mineral Fiber

ASTM E1264 CLASSIFICATION
Type IV, Form 2, Pattern E

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE
BioShield® treatment included for added mold and mildew resistance.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment. Cleanable with sanitizing chemicals.

WARRANTY
10-year 104/90 Limited Warranty

© 12/15 CertainTeed Corporation

CertainTeed SAINT-GOBAIN Ceilings

CEILING CENTER
12964 St Charles Rock Rd
Bridgeton, MO. 63044
Phone 314/298-2502 EXT 102
Fax 314/739-1720

ACOUSTICAL CEILINGS SUBMITTALS

PROJECT:
WEBSTER UNIVERSITY
INTERDISCIPLINARY SCIENCE BUILDING
8274 BIG BEND BLVD
WEBSTER GROVES, MO. 63119

GENERAL CONTRACTOR:
PARIC CONSTRUCTION
77 WESTPORT PLAZA
SUITE 250
ST LOUIS, MO. 63146

ACOUSTICAL CONTRACTOR:
ST CHARLES ACOUSTICS L.L.C

ACOUSTICAL MATERIALS

BOARD/TILE APC-1:	Certainteed 24” x 24” x 1” Narrow Reveal Edge Symphony F Item# 1342F-IOF-1
BOARD/TILE APC-2:	Certainteed 24” x 48” x 3/4” Narrow Reveal Edge Symphony M Item# 1220BF-IOF-1
BOARD/TILE APC-3A:	Certainteed 24” x 24” x 3/4” Narrow Reveal Edge Symphony M RXS Item# 1222F-RXS-1
BOARD/TILE APC-3B:	Certainteed 24” x 24” x 3/4” Square Edge Symphony M RXS Item# 1222-RXS-1
BOARD/TILE APC-5:	Certainteed 24” x 24” x 5/8” Square Edge Fine Fissured Item# HHF-157
BOARD/TILE APC-7:	Certainteed 24” x 48” x 3/4” Narrow Reveal Edge Symphony M Item# 1220BF-IOF-1
BOARD/TILE APC-8:	Certainteed 24” x 72” x 9/16” Narrow Reveal Edge Ecophon Gedina E 24 Item# 3540 4350
BOARD/TILE APC-9:	Certainteed 24” x 48” x 3/4” Narrow Reveal Edge Symphony M Item# 1220BF-IOF-1 with Kinetics Quiet tile

SUSPENSION SYS. FOR APC1/3A/3B	Certainteed Elite Narrow Stab Grid System Item ES12-12-18 Color White
SUSPENSION SYS. FOR APC2/7/8/9:	Chicago Metallic 4600 Ultraline Bolt Slot Grid System Item 4600-01 Color White
SUSPENSION SYS. FOR APC5:	Certainteed Classic Stab Grid System Item CS12-12-15 Color White