

Ecophon®

Gedina™ E, Gedina™ E XL
VOC Compliant

LOW
VOC

\$\$\$




LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content
Pre: **1%** | Post: **70%**

TOOLS

Visit [CertainTeed.com/Ceilings](https://www.certainteed.com/Ceilings)
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

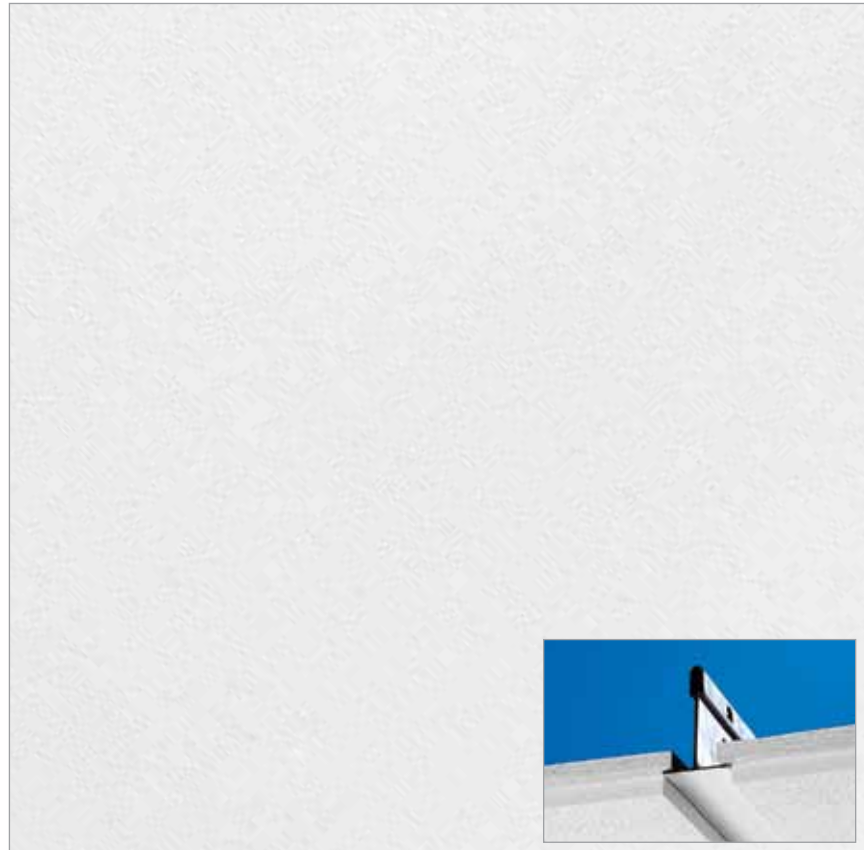



FEATURES & BENEFITS

- Exclusive 3RD™ technology combines high recycled glass content with a renewable plant-based binding agent, completely replacing traditional petroleum-based binding
- Superior sound absorption
- Extremely low particle emissions
- Wide selection of sizes for maximum design flexibility
- **Sag and mold resistant**
- Akutex FT (white) has exceptional light diffusion and retro-reflection
- Fully encapsulated with tissue backing for maximum performance
- Painted, durable edges that resist damage from handling

APPLICATIONS

- Open Plan Offices
- Education
(walls to deck)
- Healthcare
(walls to deck)
- Libraries
- Hospitality
- Resorts
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS





Gedina™ E/15 Narrow Reveal (35419063)

ATTRIBUTES

GEDINA™ E/15 – PAINTED EDGE	DIMENSIONS (INCHES)	EDGE DETAIL									
35419063	24 x 24 x 9/16	Narrow Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
35406011	24 x 48 x 9/16	Narrow Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
35406013	48 x 48 x 9/16	Narrow Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
GEDINA™ E/15 XL – PAINTED EDGE											
35404354	24 x 60 x 9/16	Narrow Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
35404350	24 x 72 x 9/16	Narrow Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
35404351	24 x 96 x 9/16	Narrow Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
GEDINA™ E/24 – PAINTED EDGE											
35394456	24 x 24 x 9/16	Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
35419085	24 x 48 x 9/16	Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
35419076	48 x 48 x 9/16	Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
GEDINA™ E/24 XL – PAINTED EDGE											
3559 7876	24 x 60 x 9/16	Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
3540 4376	24 x 72 x 9/16	Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%
3540 4375	24 x 96 x 9/16	Reveal	0.90	21	Yes	Inherent	0.84	Yes	Class A	Certified	71%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Fiberglass

ASTM E1264 CLASSIFICATION

Type XII, Form 2, Pattern G

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Cleanable with mild detergent.

WARRANTY

10-year Ecophon® Warranty

Technical Support | certainteed.com/ceilings 800-233-8990

© 09/15 CertainTeed Corporation

CertainTeed
SAINT-GOBAIN
Ceilings

**CEILING CENTER
12964 St Charles Rock Rd
Bridgeton, MO. 63044
Phone 314/298-2502 EXT 102
Fax 314/739-1720**

**ACOUSTICAL CEILINGS
SUBMITTALS**

**PROJECT:
WEBSTER UNIVERSITY
INTERDISCIPLINARY SCIENCE BUILDING
8274 BIG BEND BLVD
WEBSTER GROVES, MO. 63119**

**GENERAL CONTRACTOR:
PARIC CONSTRUCTION
77 WESTPORT PLAZA
SUITE 250
ST LOUIS, MO. 63146**

**ACOUSTICAL CONTRACTOR:
ST CHARLES ACOUSTICS L.L.C**

ACOUSTICAL MATERIALS

BOARD/TILE APC-1:	Certainteed 24" x 24" x 1" Narrow Reveal Edge Symphony F Item# 1342F-IOF-1
BOARD/TILE APC-2:	Certainteed 24" x 48" x 3/4" Narrow Reveal Edge Symphony M Item# 1220BF-IOF-1
BOARD/TILE APC-3A:	Certainteed 24" x 24" x 3/4" Narrow Reveal Edge Symphony M RXS Item# 1222F-RXS-1
BOARD/TILE APC-3B:	Certainteed 24" x 24" x 3/4" Square Edge Symphony M RXS Item# 1222-RXS-1
BOARD/TILE APC-5:	Certainteed 24" x 24" x 5/8" Square Edge Fine Fissured Item# HHF-157
BOARD/TILE APC-7:	Certainteed 24" x 48" x 3/4" Narrow Reveal Edge Symphony M Item# 1220BF-IOF-1
BOARD/TILE APC-8:	Certainteed 24" x 72" x 9/16" Narrow Reveal Edge Ecophon Gedina E 24 Item# 3540 4350
BOARD/TILE APC-9:	Certainteed 24" x 48" x 3/4" Narrow Reveal Edge Symphony M Item# 1220BF-IOF-1 with Kinetics Quiet tile

SUSPENSION SYS. FOR APC1/3A/3B Certainteed
Elite Narrow Stab Grid System
Item ES12-12-18 Color White

SUSPENSION SYS. FOR APC2/7/8/9: Chicago Metallic
4600 Ultraline Bolt Slot Grid System
Item 4600-01 Color White

SUSPENSION SYS. FOR APC5: Certainteed
Classic Stab Grid System
Item CS12-12-15 Color White



77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0380

Paric Corporation

PROJECT: 15051-Webster University Interdisciplinary Science Building

DATE: 12/06/2016

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

Fax;
314-241-2203

RE: Acoustical Panel Ceiling Product Data

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings	☒ Approval	☐ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	SENT VIA:	☐ Returned
☐ Specifications	☐ Attached	☐ Returned for Corrections
☒ Other: Product Data	☐ Separate Cover Via:	☐ Due Date:

Item	Package	Code	Rev.	Copies	Date	Description	Status
Submittal		095113-006	1		12/06/2016	Acoustical Panel Ceiling Product Data	Submitted

NOTES:

CC:

Signed: _____
Devin Gates

Webster University Interdisciplinary Science Building

Generated on:	September 22, 2016
Gross square feet:	49,000
Address:	8274 Big Bend Webster Groves, Missouri 63119
Total product price:	\$115,750 USD

Price should reflect final product cost excluding installation.

Product Summary

Performa® VOC Compliant Symphony F Narrow Reveal	Quantity:17,000 SF	Price:\$ 1.25 USD/ SF	Extended Price:\$ 21,250 USD
Performa® Symphony M Narrow Reveal	Quantity:26,700 SF	Price:\$ 1.20 USD/ SF	Extended Price:\$ 32,040 USD
Performa® Rx Symphony M Narrow Reveal	Quantity:1,200 SF	Price:\$ 1.20 USD/ SF	Extended Price:\$ 1,440 USD
Performa® Fine Fissured Trim	Quantity:1,400 SF	Price:\$ 0.40 USD/ SF	Extended Price:\$ 560 USD
Ecophon Gedina E/15 XL	Quantity:3,600 SF	Price:\$ 3.00 USD/ SF	Extended Price:\$ 10,800 USD
Performa® Rx Symphony M Trim	Quantity:1,200 SF	Price:\$ 1.20 USD/ SF	Extended Price:\$ 1,440 USD
9/16" Elite Narrow Stab Main Runner	Quantity:5,448 LF	Price:\$ 0.65 USD/ LF	Extended Price:\$ 3,541 USD
15/16" Classic Stab Main Runner	Quantity:360 LF	Price:\$ 0.50 USD/ LF	Extended Price:\$ 180 USD
15/16" Classic Stab Cross Tee	Quantity:0 LF	Price:\$ 720.00 USD/ LF	Extended Price:\$ 0 USD
9/16" Elite Narrow Stab Cross Tee	Quantity:10,896 LF	Price:\$ 0.65 USD/ LF	Extended Price:\$ 7,082 USD
9/16" Elite Narrow Stab Cross Tee	Quantity:5,448 LF	Price:\$ 0.65 USD/ LF	Extended Price:\$ 3,541 USD
15/16" Classic Stab Cross Tee	Quantity:360 LF	Price:\$ 0.50 USD/ LF	Extended Price:\$ 180 USD
15/16" Traditional Wall Angle	Quantity:9,600 LF	Price:\$ 0.36 USD/ LF	Extended Price:\$ 3,456 USD
9/16" Smoothline Bolt Slot Main Runner	Quantity:7,560 LF	Price:\$ 1.00 USD/ LF	Extended Price:\$ 7,560 USD
9/16" Smoothline Bolt Slot Cross Tee	Quantity:7,560 LF	Price:\$ 1.00 USD/ LF	Extended Price:\$ 7,560 USD
9/16" Smoothline Bolt Slot Cross Tee	Quantity:15,120 LF	Price:\$ 1.00 USD/ LF	Extended Price:\$ 15,120 USD

Project Contribution Summary