

CABINET DOOR STYLES—AMBASSADOR, ACADEMY, COSMOPOLITAN, CAVALIER



F - Full glass with pull



G - Full glass with pull & Saf-T-Lok™



V - Vertical duo with pull



W - Vertical duo with pull & Saf-T-Lok™



S21- Solid with pull



L22 - Solid with pull & Saf-T-Lok™




D - Horizontal duo with pull



B10 - Solid with pull, view window & Saf-T-Lok™

E,G, L22, W.3 & B10 Door Styles w SAF-T-LOK™



Note: If lock option is selected, lock is centered vertically on door, and the center of the handle will be 3-5/8" above the lock unless recessed pull is used (Standard on ADA XXX2 series doors). Recessed pulls are always centered vertically next to lock.



F - Full glass with recessed pull (Std. on ADA doors)



G - Full glass with Saf-T-Lok & recessed pull (Std. on ADA doors)



V - Vertical duo & recessed pull (Std. on ADA doors)



W - Vertical duo with Saf-T-Lok & recessed pull (Std. on ADA doors)



S21 Door with recessed pull (Std. on ADA doors)



L22 - Solid with Saf-T-Lok & recessed pull (Std. on ADA doors)



E - Horizontal duo with pull & Saf-T-Lok



L24 Solid with cylinder key lock & no pull

Please allow for this when positioning cabinet for installation.



ACTIVAR INC.
CONSTRUCTION PRODUCTS GROUP

SAF-T-LOK™ IS A TRADEMARK OF ACTIVAR
DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING

HEADQUARTERS/ JL INDUSTRIES: 9702 NEWTON AV S, BLOOMINGTON, MN 55431

ACPG WEST COAST/SAMSON: COMMERCE, CA • WARE HOUSES: FT MYERS FL, ATLANTA GA, DALLAS TX, SEATTLE WA, LANCASTER PA, FARGO ND, OMAHA NE 5/13/2016

CABINET DOOR STYLES

NOTE: 4" TRIM STYLE (12, 22, 32) HAS RECESSED PULL

Distributed by

www.Ameraproducts.com

Phone: (800) 608-6568

Fax: (409) 840-5545

info@ameraproducts.com

CABINET GLAZING —AMBASSADOR, ACADEMY, COSMOPOLITAN, CAVALIER, CROWNLINE

Distributed by
www.Ameraproducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com



10 CLEAR ACRYLIC
17 CLEAR TEMPERED
18 LAMINATED SAFETY GLASS



15 BRONZE ACRYLIC
COMPLETELY
OBSCURES CONTENTS




16 GRAY ACRYLIC
SHADES VIEW OF
CONTENTS



13 CLEAR WIRE GLASS
WITH SAFETY FILM


ADA MOUNTING HEIGHT

Door with Standard Pull Centered & No Lock - F, S, V, D
Or Any Door with Flush Pull - Lock or No Lock

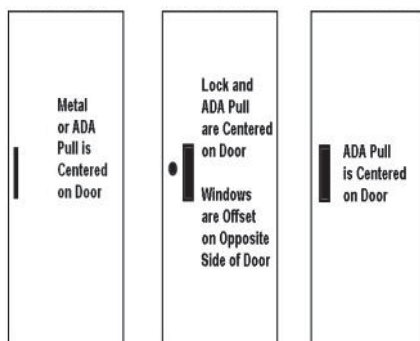


Calculate Bottom Edge of Wall Opening
to Have Door Pull Centered at 48" AFF:

48" minus (Wall Opening Height Divided by 2).
Example for 1017F10: $48" - (25" \div 2) = 35.5"$ AFF

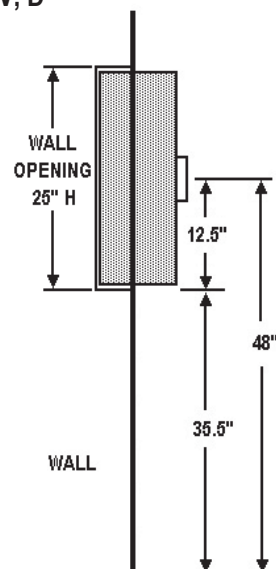


Example for 24" High Non FX Cabinet

Door with Standard Pull & Lock -
E, G, W, & B10



Calculate Bottom Edge of Wall Opening
to Have Door Pull Centered at ~ 48" AFF:

44" minus (Wall Opening Height Divided by 2).
Example for 1017G10: $44" - (25" \div 2) = 31.5"$ AFF

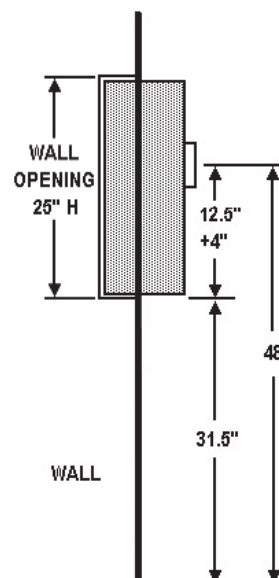



77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0471

Paric Corporation

PROJECT: 15051-Webster University Interdisciplinary Science Building

DATE: 02/02/2017

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

Fax;
314-241-2203

RE: Fire Extinguisher Cabinets product data

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings	☒ Approval	☐ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	SENT VIA:	☐ Returned
☐ Specifications	☐ Attached	☐ Returned for Corrections
☒ Other: Product Data	☐ Separate Cover Via:	☒ Due Date: 01/12/2017

Item	Package	Code	Rev.	Copies	Date	Description	Status
Submittal		104413-001	1		02/02/2017	Fire Extinguisher Cabinets product data	Submitted

NOTES:

CC:

Signed: _____
Devin Gates