Page 7 for specified product

FIRE PROTECTION AND LIFE SAFETY

Division 10 44 00
Fire Protection Cabinets
Fire Extinguishers
Fire Blankets

Division 10 43 00
Defibrillators and Cabinets
Emergency Oxygen Cabinets

Division 21 12 00
Fire Suppression Hoses
Hose Racks Valves and Nozzles

ACTIVAR INC.
CONSTRUCTION PRODUCTS GROUP

JL INDUSTRIES · AIR LOUVERS · SAMSON PRODUCTS · THOMAS ENTERPRISES · HIAWATHA

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

INTRODUCTION

ABOUT JL INDUSTRIES

Choices and Quality: We offer you the convenience of the full range of products from JL Industries, Samson Products and Thomas Enterprises complete in one catalog.

Here you can find the largest selection of fire extinguisher cabinets in the industry, including steel, stainless steel, aluminum, brass and bronze with a host of optional features. JL's reputation for quality products has made us an industry standard for over 65 years.

More Warehouse Locations: With the addition of two new locations, you can now get 1-3 day shipping on hundreds of our most popular products from ten warehouses in the US with our Quick Ship Program. See a list of locations on page 24, or check the latest stock list on our website.

Environmental: Most of our cabinets contain recycled material that contributes to the MR Recycled Content Credit and have finishes with "Low Emitting Materials" for the EQ 4.2 Credit. Contact us for the documentation you need.

Versatile Manufacturing Capabilities: With the combined resources of our two manufacturing facilities—each with it's own specialty—you can create your own distinctive cabinet with the size and features you need, for the look you want. Just Ask Us!

Our involvement with organizations such as the National Fire Prevention Association (NFPA), the Door and Hardware Institute (DHI), the Construction Specifiers Institute (CSI) and the National Association of Fire Equipment Distributors (NAFED) enables us to remain at the forefront of industry requirements with products to keep you in compliance with current building codes.

Website Resources: Find all of the documentation you need and the most current product information on our website at WWW.ACTIVARCPG.COM.

WARRANTY

All fire protection products carry a one-year warranty after date of shipment against defects in materials and workmanship. We will replace or repair any product found defective within this period at our discretion. No other warranty express or implied is valid. Fire extinguishers may carry a longer warranty.

AMERICANS WITH DISABILITIES ACT (ADA) GUIDELINES

Look for Model Numbers in Blue to find cabinets that comply with ADAC.

- Cabinets with the number "2" as the fourth character of the model number. These models project only 4" from the wall and include a flush pull.
- All trimless and flat trim models with standard pull.
- All 1 1/4", 1 1/2", 2 1/2" or 3" trim models with standard pull—excluding bubble cabinets.

Projection Requirements

The federal regulations for ADA Standards for Accessible Design Section: Protruding Objects Section (28 CFR 36, 4.4.1) specify that "objects projecting from walls with their leading edges between 27" and 80" (685 mm and 2030 mm) above the finished floor (AFF) shall protrude no more than 4" (100mm) into walks, halls, corridors, passageways, or aisles. Please note that a surface-mounted cabinet installed in such a way that any part of it falls between 27" and 80" AAF would not meet ADA requirements.

These are national standards which are subject to change by local authorities having jurisdiction. ADA requirements, in particular, are constantly evolving through ongoing legislative and judicial actions. For more information: http://www.ada.gov

Mounting Heights

The NFPA and ADA have created guidelines for the mounting of cabinets and extinguishers to provide safety and/or easy access to the equipment. ADA guidelines specify reach ranges for building occupants who require access to equipment such as fire extinguishers and other fire safety devices. According to the ADA Standards (28 CFR 36, 4.2.5 and 4.2.6 the cabinet handle be mounted higher than 48" AFF for applications which allow for only a forward approach in a wheelchair to the object. It should be noted that these restrictions also fall within the current National Fire Protection Association (NFPA) guidelines, which call for a maximum mounting height of 60" AFF to the top of the extinguisher.

See our website for more information on mounting heights.

ADA COMPLIANT CABINET STYLES - TOP VIEW

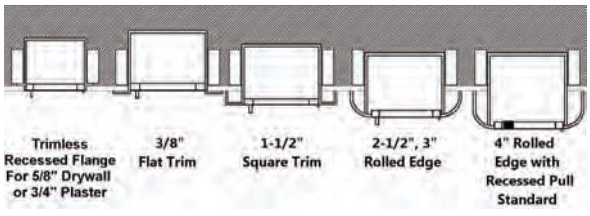

ADA MOUNTING HEIGHTS

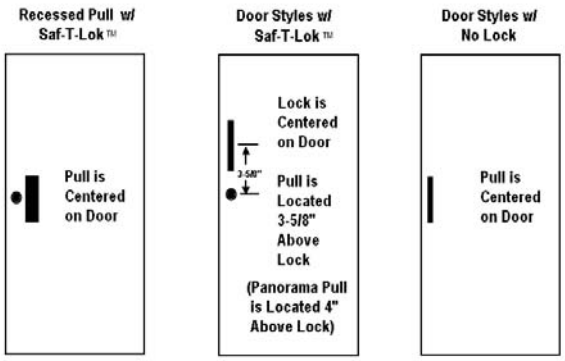

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

JL INDUSTRIES INTRODUCES THE NEW FIRE-FX2™ FIRE-RATED CABINETS

- New UL-Listing
- Lightweight Insulation
- Lower Shipping Costs
- Easier to Install
- Patent-Pending

c UL us LISTED

1037V10FX2

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

JL Industries led the industry by introducing the first pre-lined Fire-Rated Cabinets in 1991. Those cabinets have changed and simplified the installation process forever.

Now, JL has taken the next step and eliminated the heavy gypsum wallboard to line cabinets, by replacing it with lightweight, mineral wool insulation. The second steel tub is not needed with the new design, reducing the weight even further.

FIRE-FX2™ cabinets are insulated with Firespan™ 90 by Thermafiber®, a UL-Listed, inorganic, mineral wool fiber insulation with a high recycled content.

1000, 1800, 1500 Series Cabinets Weigh an average of 14.75 lbs less!

UL LISTING

Tested to maintain one and two-hour fire rated wall barriers, in accordance with ANSI/ UL-1479 (ASTM E814 and ULC.CAN S115) for membrane penetration firestops.

TO ORDER OR SPECIFY

Just add FIRE-FX2™ option to the end of the seven-digit JL model number. For example, if you want an Ambassador 1017F10 with the fire rated option, ask for the **1017F10FX2**.

NEW FX2 WALL OPENINGS IN 2015

Are slightly larger than the previous FX wall openings to accomodate FIRE-FX2™. See website for updated catalogs and submittals with new wall openings.

Look for the Red FX2 Symbol!

New Fire-Span™ Insulation



METAL OR WOOD FRAMING



MASONRY

TABLE OF CONTENTS

STEEL
Ambassador 6-7
Classic 12
Clear Vu 9
Corner Vu 13
Crownline Valve/Hose 18-19
Decorline 13
Defibrillator 16
Economyline 12
Embassy 10
Panorama 8
Royal Blanket & Extinguisher 3600 Series . 20
School 16
Security 16
SMB 9

STAINLESS STEEL
Clear Vu 9
Corner Vu 13
Cosmopolitan 6-7
Crownline Valve/Hose 18-19
Defibrillator 16
Embassy 10
Panorama 8
Royal Blanket & Extinguisher 3600 Series . . 20
School 16
Security 16

ALUMINUM
Academy 6-7
Classic 12
Clear Vu 9
Corner Vu 13
Crownline Valve/Hose 18-19
Decorline 13
Defibrillator 16
Economyline 12
Embassy 10
Panorama 8
Royal Blanket & Extinguisher 3600 Series . . 20
SM 14

ABS PLASTIC & FIBERGLASS
ABS 12
FB 14

BRONZE
Cavalier 11
Clear Vu 9
Embassy 10

BRASS
Cavalier 11
Clear Vu 9
Embassy 10

EXTINGUISHERS 11
AED CABINETS 16
FIRE HOSE EQUIPMENT 17
ACCESSORIES 20, 21
PROJECT GALLERY 22
KEY TO CABINET NUMBERS 23
OPTIONAL METAL FINISHES 24
LOCATIONS 24

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE EXTINGUISHERS

COSMIC EXTINGUISHERS: Multi-Purpose Chemical

General Data: These units contain specially fluidized and siliconized mono ammonium phosphate powder, which smothers and breaks the chain reaction on Class B fires, fuses and insulates Class A fires and is a non-conductor of electricity. Non-toxic.
Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Upright squeeze grip operation approved to -65°F (-52°C).
Construction: Heavy-duty steel cylinder with rugged metal valve and siphon tube with replaceable molded valve stem seal, visual pressure gauge, pull pin and upright squeeze grip. Corrosion and impact-resistant powder coat finish.
CLASS A,B,C Fires

GALAXY EXTINGUISHERS: Regular Dry Chemical

General Data: These models contain a siliconized sodium bicarbonate base, the traditional dry chemical. Cleanup after use is generally easy, because the chemical does not normally bake to a hot metal surface. Non-toxic.
Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Upright squeeze grip operation approved to -65°F (-52°C).
Construction: Heavy-duty steel cylinder with rugged metal valve and siphon tube with replaceable valve stem seal, visual pressure gauge pull pin and upright squeeze grip.
CLASS B,C Fires

SATURN EXTINGUISHERS: Class K Wet Chemical

General Data: These units are ideal for commercial restaurant applications as a portable supplement to pre-engineered suppression systems. A low "pH" potassium acetate solution is discharged in a fine mist that provides excellent range while preventing splashing and creating an effective saponification foam-type blanket necessary for suppressing liquid cooking media fires.
Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out.
Construction: Stainless steel cylinder with protective nozzle tip orifice seal and non-metallic nozzle tip finger guard. Industry standard horn and nozzle design. Name plate shows only the class "K" symbol.
CLASS K Fires.

All units meet the current requirements established by the National Fire Protection Association (NFPA) for NFPA10 (2013 version) "Standard for Portable Fire Extinguishers", and any other applicable NFPA standards. All units UL listed for US and Canada and meet local and national OSHA requirements for fire extinguishers.

CLASS A FIRES - PAPER, WOOD, CLOTH, ETC., WHERE QUENCHING BY WATER OR INSULATING BY DRY CHEMICAL IS EFFECTIVE.

CLASS B FIRES - FLAMMABLE LIQUIDS WHERE SMOTHERING ACTION IS REQUIRED.

CLASS C FIRES - LIVE ELECTRICAL EQUIPMENT WHERE THE NON-CONDUCTIVITY OF EXTINGUISHANT IS VITAL.

CLASS K FIRES

MERCURY EXTINGUISHERS: Halotron®

General Data: This model contains the clean extinguishing agent Halotron® 1, which is EPA-approved, government-accepted and specified. This agent discharges as a liquid, then quickly evaporates, leaving no residue to clean up afterwards. U.S. FAA-approved for use in airports. NFPA-10 rating. Electrically non-conductive.
Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Temperature range from -40°F to +120°F.
Construction: Drawn steel cylinder with steel siphon tubes, power cone discharge stream, upright squeeze grip visual pressure gauge and corrosion-resistant paint finish.
CLASS A,B,C Fires

SENTINEL EXTINGUISHERS: Carbon Dioxide

General Data: This extinguisher contains liquid carbon dioxide under pressure.
Operation: Squeeze the lever, which opens the valve, allowing the carbon dioxide to be forced out. The discharge, which changes into a gas and appears as a smothering cloud of white snow, is then directed to the fire through a funnel-shaped horn. Electrically non-conductive.
Construction: Lightweight, high-pressure, aluminum cylinder with O-ring seal and straight thread brass valve fits all sizes. The Sentinel is absolutely rust-free and up to 30% lighter than CO2 units with steel cylinders.
CLASS B,C Fires

272: Water Mist for Electrical

General Data: This non-toxic water mist extinguisher is ideal for Class A fires and where a potential Class C (electrical) hazard exists. Units shipped empty.
Operation: The unique misting nozzle provides safety from electrical shock, making this extinguisher ideal for use in telecommunications and cleanroom environments.
Construction: Non-magnetic cylinder and misting nozzle. For use in medical facilities.
Class A,C Fires

GRENADIER EXTINGUISHERS: Pressurized Water

General Data: The "water press" extinguisher contains water and compressed air. Units shipped empty.
Operation: Squeeze the lever, which opens the valve, allowing the water to be forced out. Upright squeeze grip operation.
Construction: Butt-welded 304-L stainless steel cylinder (eliminates all internal and external crevices). Rugged stainless steel discharge lever and fixed carry handle with visual pressure gauge, pull pin. Heavy-duty, brass, chrome-plated valve body with replaceable molded valve stem seal. UL labeled chemical engine hose.
CLASS A Fires

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

WHEELED EXTINGUISHERS: Multi-Purpose and Regular Dry Chemical

General Data: Available in three size capacities with two choices of extinguishing agent and three different operational design configurations, the best match for your hazard protection needs can be accurately selected, maximizing the fire safety of your operation. Designed for one man operation these units are easily transportable through doorways and over rough terrain. All models are rechargeable and meet relevant UL, ULC, TC & DOT requirements. Selected models have US Coast Guard Approval. Stationary models are also available. See submittals for complete information.

Typical Uses: Offshore rigs, ship docks, refineries, chemical plants, aircraft ramps, remote construction sites, large laboratories, processing plants, storage and loading areas. Not for use on sensitive electronic equipment.

Construction: DOT approved cylinders with chrome plated brass valve assemblies. Cylinders are manufactured to DOT specification 4BW240. Highly visible pressure-indicating gauge. Cylinders and carriages are shot blasted, primed and coated with the finest polyurethane powder paint finish that exceeds Underwriter's Laboratories 240 hour salt spray requirements. Hoses are included see submittal for sizes. All component parts are replaceable. Tow loops are available upon request. All units are equipped with all weather semi-pneumatic 12.3 inch diameter, 3.5 inch wide tires that allows for easy movability through narrow doors and walkways by a single operator. Built to ANSI/UL 299 and 711 standards

All units meet the current requirements established by the National Fire Protection Association (NFPA) for NFPA10 (2013 version) "Standard for Portable Fire Extinguishers", and any other applicable NFPA standards. All units UL listed for US and Canada and meet local and national OSHA requirements for fire extinguishers.

Other Extinguishant Types: Carbon Dioxide and Halotron™ wheeled

Model	Nominal Capacity	Shipping Weight	Cylinder Diameter	Overall Height	Overall Width	Shipping Volume	U/L Rating	Optional Mark Bracket	US Coast Guard Approved
Grenadier-P	2-1/2 gal.	7.75 lbs.	7"	24-1/2"	9"	1.1 cu.ft.	2A	MB810	YES
Cosmic 2-1/2E*	2-1/2 lbs.	5.5 lbs.	3-3/8"	15-1/2"	5-3/4"	.2 cu.ft.	1A-10BC	MB817C or MB817A*	YES
Cosmic 5E	5 lbs.	10 lbs.	4-1/4"	16-3/8"	7-1/4"	.35 cu.ft.	3A-40BC	MB818C	YES
Cosmic 6E	6 lbs.	12.75 lbs.	5"	16"	7-3/4"	.5 cu.ft.	3A-40BC	MB808A	YES
Cosmic 10E	10 lbs.	18.25 lbs.	5-1/8"	21"	7-3/4"	.65 cu.ft.	4A-80BC	MB846C or MB846A	YES
Cosmic 20E (FE20C)	20 lbs.	33.5 lbs.	7-1/2"	21-1/4"	8-3/4"	1.0 cu.ft.	10A-120BC	MB811C	YES
Cosmic 20E (FE20A)	20 lbs.	38 lbs.	7"	24"	10-1/4"	1.0 cu.ft.	10A-120BC	MB810A	YES
Sentinel 5	5 lbs.	14 lbs.	5-1/4"	17-3/4"	8-1/4"	.65 cu.ft.	5BC	MB809C or MB809A	YES
Sentinel 10	10 lbs.	28.25 lbs.	7"	24"	12"	1.3 cu.ft.	10BC	MB810C or MB810A	YES
Sentinel 15	15 lbs.	37.75 lbs.	7"	30"	12"	1.0 cu.ft.	10BC	MB810C or MB864A	YES
Sentinel 20	20 lbs.	50.75 lbs.	8"	30"	13"	2.1 cu.ft.	10BC	MB811C or MB811A	YES
Galaxy 2-1/2*	2-1/2 lbs.	5.5 lbs.	3-3/8"	15-1/2"	5-3/4"	.2 cu.ft.	10BC	MB817C or MB817A*	YES
Galaxy 5	5 lbs.	9.25 lbs.	4-1/4"	15-1/4"	5-1/2"	.35 cu.ft.	10BC	MB818A	YES
Galaxy 5-1/2	5-1/2 lbs.	10.5 lbs.	4-1/4"	16-3/8"	7-1/4"	.4 cu.ft.	40BC	MB818C or MB818A	YES
Galaxy 6	6 lbs.	13.75 lbs.	5"	16-1/4"	8-1/2"	.5 cu.ft..	40BC	MB808A	YES
Galaxy 10	10 lbs.	18.25 lbs.	5-1/8"	21"	7-3/4"	.65 cu.ft.	40BC or 60BC	MB846C or MB846A	YES
Galaxy 20	20 lbs.	38 lbs.	7-1/2"	23-1/4"	10-1/4"	1.0 cu.ft.	120BC	MB810C or MB810A	YES
Mercury 2-1/2*	2-1/2 lbs	5.25 lbs	3-3/8"	15-1/2"	6-3/8"	.25 cu.ft.	2BC	MB817C or MB817A*	N/A
Mercury 5	5 lbs	9.5 lbs	4-1/4"	16-3/8"	7-1/4"	.3 cu.ft.	5BC	MB818C or MB818A	YES
Mercury 11 (FM11C)	11 lbs	21.25 lbs	7"	17-1/2"	8-5/8"	1.0 cu.ft.	1A-10BC	MB810C	YES
Mercury 11 (FM11A)	11 lbs	22.5 lbs	6"	21-7/8"	9-1/4"	1.0 cu.ft.	1A-10BC	MB812A	YES
Mercury 15-1/2 (FM15C)	15-1/2 lbs	25.75 lbs	7"	17-1/2"	8-5/8"	1.0 cu.ft.	2A-10BC	MB810C	YES
Mercury 15-1/2 (FM15A)	15-1/2 lbs	27.5 lbs	6"	21-7/8"	9-1/4"	1.0 cu.ft.	2A-10BC	MB812A	YES
Saturn 15	1.8 gal	22.5 lbs	7"	19-1/4"	9"	.9 cu.ft.	1-A:K or 2-A:K	MB810C or MB810A	--
Saturn 25	2.5 gal	33.5 lbs.	7"	24-1/2"	9"	1.1 cu.ft.	1-A:K or 2-A:K	MB810C or MB810A	--
272	2.5 gal	8 lbs. «	7"	28"	14"	1.3 cu ft.	2AC	14315	--

Dimensions in Inches

***INDICATES MARK BRACKET STANDARD. J HOOK WALL BRACKET STANDARD WITH ALL OTHER EXTINGUISHERS.**
NOTE: JL EXTINGUISHERS ARE SHIPPED FULLY CHARGED WITH THE EXCEPTION OF THE GRENADIER & 272. NFPA REGULATIONS ALSO REQUIRE EXTINGUISHERS TO BE INSPECTED WHEN INITIALLY PLACED IN SERVICE AND ALL LOCAL FIRE CODE AND ALL LOCAL FIRE CODE AND TAGGING REQUIREMENTS MUST BE ADHERED TO. ALL FIRE EXTINGUISHER SIZES ARE NOMINAL. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION ABOUT ORDERING TAGGED EXTINGUISHERS IN YOUR AREA.

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE EXTINGUISHER CABINETS

AMBASSADOR SERIES: Steel Trim and Door

Door and Trim Construction: Cold rolled steel with white powder-coat finish standard. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.
Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 2 1/2", 3", 4" (recessed pull), 4 1/2" Rolled Edge. Surface-mount has a square edge or optional rolled edge upon request. 1 3/4" face trim on frame and 1 1/4" trim on doors with glazing.
Tub: Constructed of cold rolled steel with white powder-coat finish standard.
Options at Additional Cost: Color door and trim or tub. Rolled Edge Surface Mount Cabinet. Custom colors. See page 24.
Fire-Rated Option Available: Yes

AMBASSADOR
1017F10 with Optional
Lettering (BLK OPTION)

AMBASSADOR
1013F10

ACADEMY SERIES: Aluminum Trim and Door

Door and Trim Construction: Clear anodized aluminum. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.
Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 2 1/2", 3", 4" (recessed pull), 4 1/2" Rolled Edge. Surface-mount has a square edge. 1 3/4" face trim on frame and 1 1/4" trim on doors with glazing. Rolled edge models are constructed of mechanically-joined extrusions, except for models 1827 and 1027 which are die formed. Die formed corners provide an attractive, rounded edge - unique to the JL line of cabinets!
Tub: Constructed of cold rolled steel with white powder-coat finish standard. Surface-mounted models have clear anodized aluminum tubs.
Options at Additional Cost: Light, medium or dark bronze anodized finish. See page 24. Aluminum tub for non-rated use (#180 clear anodized).
Fire-Rated Option Available: Yes

ACADEMY
1027V10 (DK BRONZE OPTION)

ACADEMY
C1027V10

COSMOPOLITAN SERIES: Stainless Steel Trim and Door

Door and Trim Construction: No. 4 Stainless Steel Trim and Door. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.
Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 2 1/2", 3", 4" (recessed pull), 4 1/2" Rolled Edge. Surface-mount has a square edge or optional rolled edge upon request. 1 3/4" face trim on frame and 1 1/4" trim on doors with glazing.
Tub: Constructed of cold rolled steel with white powder-coat finish standard. Surface-mounted models have No 4 stainless tubs.
Options at Additional Cost: Custom stainless finishes - #6 satin, #7 polished, #8 mirror. Stainless tub with #4 finish. Rolled Edge Surface Mount Cabinet.
Fire-Rated Option Available: Yes

COSMOPOLITAN
1036F16 (POLISHED #7)

COSMOPOLITAN
1035S21

CABINET OPTIONS FOR ALL MODELS: AMBASSADOR, ACADEMY & COSMOPOLITAN

Door Styles w/pull

F	Full Glazing
G	Full Glazing & SAF-T-LOK™
D	Horizontal Duo Panel
E	Horizontal Duo Panel & SAF-T-LOK™
S21	Solid
L22	Solid with SAF-T-LOK™
L24	Solid with Cylinder Lock & No Handle
B	Solid with 2" x 4" Acrylic Insert & SAF-T-LOK™
V	Vertical Duo
W	Vertical Duo & SAF-T-LOK™

Door Glazing

10	Clear Acrylic
13	Clear Wire Glass w/Safety Film
15	Bronze Acrylic
16	Gray Acrylic
17	Clear Tempered Glass
18	Laminated Safety Glass

Options at Additional Cost

Vertical or Horizontal Lettering - See Page 21
Futura Embossed "Fire" Handle in Mill, White or Red
ADA Flush Pull or Chrome Turn Handle
Wall Signs & Alarms - See Page 20
Red or Black Painted Steel Tub
Engraved Metal Door or Etched Glass

TOP VIEW

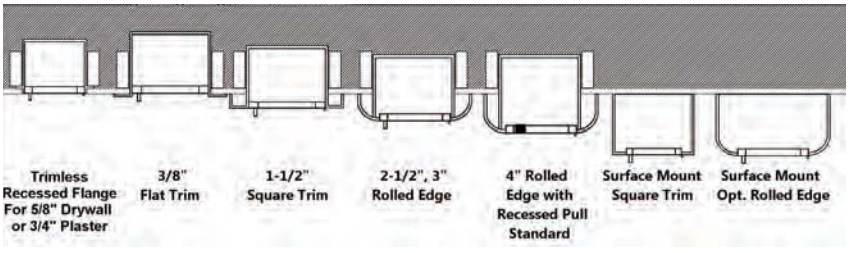

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

AMBASSADOR, ACADEMY, COSMOPOLITAN: Door Styles

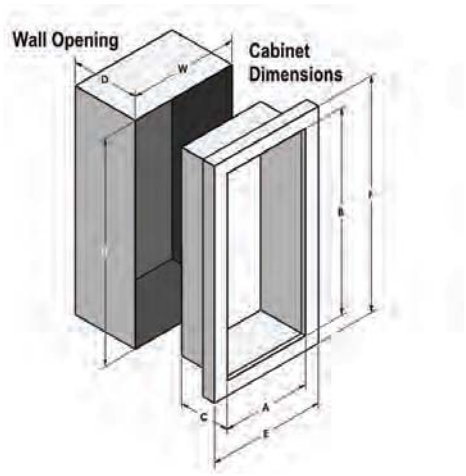

F - Full Glazing

S21 - Solid

V - Vertical Duo

D - Horizontal Duo

B10 - Solid with Glass Insert & Saf-T-Lok

G - Full Glazing with Saf-T-Lok

L22 - Solid with Saf-T-Lok

W - Vertical Duo with Saf-T-Lok

W- Vertical Duo w/ Recessed Pull & Saf-T-Lok

E-Horizontal Duo w/ Saf-T-Lok

SELECTION CHART FOR AMBASSADOR, ACADEMY, COSMOPOLITAN SERIES

Trim and Door Material and Series #				Tub I.D.			Frame O.D.		Wall Opening: Non-rated			Wall Opening: FX Option			Accom-modates Following Extinguishers
Steel	Aluminum	Stainless Steel	Trim Style	A	B	C	E	F	W	H	D	W	H	D	
AMBAS-SADOR	ACADEMY	COSMO-POLITAN		Width	Height	Depth									
8114	**8124**	**8134**	Trimless 5/8" Drywall ‡	9	18	5 1/2	12 1/8	21 1/8	10	19	5 5/8	11 5/16	20 5/16	6 3/16	
8115	**8125**	**8135**	Flat Trim	9	18	5 1/2	12 3/8	21 3/8	10	19	5 3/8	11 5/16	20 5/16	6 7/16	Cosmic & Galaxy 2.5-6, Mercury 2.5-5
8116	**8126**	**8136**	1 1/2" Square	9	18	5 1/2	12 3/8	21 3/8	10	19	4 1/8	11 5/16	20 5/16	5 3/16	
8117	**8127**	**8137**	2 1/2" Rolled	9	18	5 1/2	12 3/8	21 3/8	10	19	3 1/8*	11 5/16	20 5/16	4*	
8113	8123	8133	Surf. Mtd.	12 3/16	21 3/16	6	12 3/8	21 3/8	--	--	--	--	--	--	
1710	**1720**	**1730**	2 1/4" Square	10 1/2	24	5	13 7/8	27 3/8	11 1/2	25	3	12 13/16	26 5/16	4	
1815	**1825**	**1835**	Flat Trim	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	5 3/8	12 13/16	26 5/16	6 7/16	
1816	**1826**	**1836**	1 1/2" Square	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	4 1/8	12 13/16	26 5/16	5 3/16	Cosmic & Galaxy 2.5-6, Mercury 2.5 & 5
1817	**1827**	**1837**	3" Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	2 5/8	12 13/16	26 5/16	3 5/8	
1812	**1822**	**1832**	4" Rolled ADA	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	1 5/8*	12 13/16	26 5/16	2 11/16*	
1818	1828	1838	4 1/2" Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	1 1/8*	12 13/16	26 5/16	2 3/16*	
1014	**1024**	**1034**	Trimless 5/8" Drywall ‡	10 1/2	24	6	13 5/8	27 1/8	11 1/2	25	6 1/8	12 13/16	26 5/16	6 11/16	
1015	**1025**	**1035**	Flat Trim	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	5 7/8	12 13/16	26 5/16	6 15/16	
1016	**1026**	**1036**	1 1/2" Square	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	4 5/8	12 13/16	26 5/16	5 11/16	Cosmic & Galaxy 2.5-10, Mercury 2.5 & 5, Sentinel 5
1017	**1027**	**1037**	3" Rolled	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	3 1/8	12 13/16	26 5/16	4	
1012	**1022**	**1032**	4" Rolled ADA	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	2 1/8*	12 13/16	26 5/16	3 3/16*	
1018	1028	1038	4 1/2" Rolled	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	1 5/8*	12 13/16	26 5/16	2 11/16	
1013	1023	1033	Surf. Mtd.	13 11/16	27 3/16	6 1/2	13 7/8	27 3/8	--	--	--	--	--	--	
2014	**2024**	**2034**	Trimless 5/8" Drywall ‡	12	27	7 3/4	15 1/8	30 1/8	13	28	7 7/8	14 5/16	29 5/16	8 7/16	
2015	**2025**	**2035**	Flat Trim	12	27	7 3/4	15 3/8	30 3/8	13	28	7 5/8	14 5/16	29 5/16	8 11/16	
2016	**2026**	**2036**	1 1/4" Square	12	27	7 3/4	15 3/8	30 3/8	13	28	6 5/8	14 5/16	29 5/16	7 11/16	Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10
2017	**2027**	**2037**	2 1/2" Rolled	12	27	7 3/4	15 3/8	30 3/8	13	28	5 3/8*	14 5/16	29 5/16	6 7/16*	
2012	**2022**	**2032**	4" Rolled ADA	12	27	7 3/4	15 3/8	30 3/8	13	28	3 7/8*	14 5/16	29 5/16	4 15/16*	
2018	2028	2038	4 1/2" Rolled	12	27	7 3/4	15 3/8	30 3/8	13	28	3 3/8*	14 5/16	29 5/16	4 7/16*	
2013	2023	2033	Surf. Mtd.	15 3/16	30 3/16	8 1/4	15 3/8	30 3/8	--	--	--	--	--	--	
3015	**3025**	**3035**	Flat Trim	16	32	7 3/4	19 3/8	35 3/8	17	33	7 5/8	18 5/16	34 5/16	8 11/16	
3016	**3026**	**3036**	1 1/4" Square	16	32	7 3/4	19 3/8	35 3/8	17	33	6 5/8	18 5/16	34 5/16	7 11/16	Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 & 15, 272
3017	**3027**	**3037**	2 1/2" Rolled	16	32	7 3/4	19 3/8	35 3/8	17	33	5 3/8*	18 5/16	34 5/16	6 7/16*	
3012	**3022**	**3032**	4" Rolled ADA	16	32	7 3/4	19 3/8	35 3/8	17	33	3 7/8*	18 5/16	34 5/16	4 15/16*	
3018	3028	3038	4 1/2" Rolled	16	32	7 3/4	19 3/8	35 3/8	17	33	3 3/8*	18 5/16	34 5/16	4 7/16*	
3013	3023	3033	Surf. Mtd.	19 3/16	35 3/16	8 1/4	19 3/8	35 3/8	--	--	--	--	--	--	
4015	**4025**	**4035**	Flat Trim	20	27	7 3/4	23 3/8	30 3/8	21	28	7 5/8	22 5/16	29 5/16	8 11/16	
4016	**4026**	**4036**	1 1/4" Square	20	27	7 3/4	23 3/8	30 3/8	21	28	6 5/8	22 5/16	29 5/16	7 11/16	Two Each of Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5
4017	**4027**	**4037**	2 1/2" Rolled	20	27	7 3/4	23 3/8	30 3/8	21	28	5 3/8*	22 5/16	29 5/16	6 7/16*	
4012	**4022**	**4032**	4" Rolled ADA	20	27	7 3/4	23 3/8	30 3/8	21	28	3 7/8*	22 5/16	29 5/16	4 15/16*	
4018	4028	4038	4 1/2" Rolled	20	27	7 3/4	23 3/8	30 3/8	21	28	3 3/8*	22 5/16	29 5/16	4 7/16*	
4013	4023	4033	Surf. Mtd.	23 3/16	30 3/16	8 1/4	23 3/8	30 3/8	--	--	--	--	--	--	

‡ TRIMLESS MODELS FEATURE NEW DESIGN AND MAY BE INSTALLED BEFORE DRYWALL - SEE SUBMITTAL AND INSTALLATION INFORMATION

*ADD 5/8" FOR CABINETS WITH ALUMINUM FRAMES.

**COSMIC 20 & GALAXY 20 EXTINGUISHER MUST BE MOUNTED ON THE BACK OF THE CABINET TUB.

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE EXTINGUISHER CABINETS

PANORAMA SERIES: Frameless Acrylic Door

Door and Trim Construction: The Panorama features a frameless acrylic door of clear or opaque textured acrylic. The "stippled" texture of the opaque doors and exclusive aluminum backing protect the lettering, which is available in 3 colors and configurations. Clear doors also available. Flush cabinet doors are attached by a continuous hinge and equipped with zinc-plated handle and roller catch. Trim is cold rolled steel with white powder-coat, clear anodized aluminum, or #4 stainless steel.

Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or ¾" plaster. Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 2 1/2", 3", 4" , 4 1/2" Rolled Edge. Surface-mount has a square edge or optional rolled edge for steel or stainless steel upon request. 1 3/4" face trim on frame. 4" rolled edge models with P and Q doors have recessed pull, C doors have standard pull. See page 6 for sketch of mounting.

Tub: Constructed of cold rolled steel with white powder-coat finish standard.

Fire-Rated Option Available: Yes

Door Styles w/pull

C70 Clear 3/16" Unlettered Smooth Acrylic

C71 Clear 3/16" Unlettered Smooth Acrylic with SAF-T-LOK™

P Identity: 3/16" Textured Obscure Acrylic with Lettering

Q Identity: 3/16" Textured Obscure Acrylic with Lettering & SAF-T-LOK™

Options at Additional Cost

Futura Pull, ADA Flush Pull for P and Q Style Doors, Other Color Tub, Wall Signs & Alarms - Page 21

Door Glazing

40 V, Black Bkgd, White Lettering
41 V, Red Bkgd, White Lettering
42 V, White Bkgd, Black Lettering
43 V, White Bkgd, Red Lettering
45 H, Black Bkgd, White Lettering
46 H, Red Bkgd, White Lettering
47 H, White Bkgd, Black Lettering
48 H, White Bkgd, Red Lettering
50 Ascend, Black Bkgd, White Lettering
51 Ascend, Red Bkgd, White Lettering
52 Ascend, White Bkgd, Black Lettering
53 Ascend, White Bkgd, Red Lettering

PANORAMA
1036C70
W/COSMIC 10E

PANORAMA
1012P48
ADAC OPTION

SELECTION CHART FOR PANORAMA SERIES

Trim and Door Material and Series #				Tub I.D.			Frame O.D.		Wall Opening: Non-rated			Wall Opening: FX Option			Accommodates Following Extinguishers
Steel	Alumi-num	Stainless Steel	Trim Style	A	B	C	E	F	W	H	D	W	H	D	
8114			Trimless 5/8" Drywall ‡	9	18	5 1/2	12 1/8	21 1/8	10	19	5 5/8	11 5/16	20 5/16	6 3/16	Cosmic & Galaxy 2.5-6, Mercury 2.5-5
8115	**8125**	**8135**	Flat Trim	9	18	5 1/2	12 3/8	21 3/8	10	19	5 3/8	11 5/16	20 5/16	6 7/16	
8116	**8126**	**8136**	1 1/2" Square	9	18	5 1/2	12 3/8	21 3/8	10	19	4 1/8	11 5/16	20 5/16	5 3/16	
8117	**8127**	**8137**	2 1/2" Rolled	9	18	5 1/2	12 3/8	21 3/8	10	19	3 1/8*	11 5/16	20 5/16	4*	
8113	8123	8133	Surf. Mtd.	12 3/16	21 3/16	6	12 3/8	21 3/8	--	--	--	--	--	--	
1815	**1825**	**1835**	Flat Trim	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	5 3/8	12 13/16	26 5/16	6 7/16	Cosmic & Galaxy 2.5-6, Mercury 2.5 & 5
1816	**1826**	**1836**	1 1/2" Square	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	4 1/8	12 13/16	26 5/16	5 3/16	
1817	**1827**	**1837**	3" Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	2 5/8	12 13/16	26 5/16	3 5/8	
1812	**1822**	**1832**	4" Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	1 5/8*	12 13/16	26 5/16	2 11/16*	
1818	1828	1838	4 1/2" Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	1 1/8*	12 13/16	26 5/16	2 3/16*	
1014			Trimless 5/8" Drywall ‡	10 1/2	24	6	13 5/8	27 1/8	11 1/2	25	6 1/8	12 13/16	26 5/16	6 11/16	Cosmic & Galaxy 2.5-10, Mercury 2.5 & 5, Sentinel 5
1015	**1025**	**1035**	Flat Trim	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	5 7/8	12 13/16	26 5/16	6 15/16	
1016	**1026**	**1036**	1 1/2" Square	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	4 5/8	12 13/16	26 5/16	5 11/16	
1017	**1027**	**1037**	3" Rolled	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	3 1/8	12 13/16	26 5/16	4	
1012	**1022**	**1032**	4" Rolled	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	2 1/8*	12 13/16	26 5/16	3 3/16*	
1018	1028	1038	4 1/2" Rolled	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	1 5/8*	12 13/16	26 5/16	2 11/16*	
1013	1023	1033	Surf. Mtd.	13 11/16	27 3/16	6 1/2	13 7/8	27 3/8	--	--	--	--	--	--	
2014			Trimless 5/8" Drywall ‡	12	27	7 3/4	15 1/8	30 1/8	13	28	7 7/8	14 5/16	29 5/16	8 7/16	Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10
2015	**2025**	**2035**	Flat Trim	12	27	7 3/4	15 3/8	30 3/8	13	28	7 5/8	14 5/16	29 5/16	8 11/16	
2016	**2026**	**2036**	1 1/4" Square	12	27	7 3/4	15 3/8	30 3/8	13	28	6 5/8	14 5/16	29 5/16	7 11/16	
2017	**2027**	**2037**	2 1/2" Rolled	12	27	7 3/4	15 3/8	30 3/8	13	28	5 3/8*	14 5/16	29 5/16	6 7/16*	
2012	**2022**	**2032**	4" Rolled	12	27	7 3/4	15 3/8	30 3/8	13	28	3 7/8*	14 5/16	29 5/16	4 15/16*	
2018	2028	2038	4 1/2" Rolled	12	27	7 3/4	15 3/8	30 3/8	13	28	3 3/8*	14 5/16	29 5/16	4 7/16*	
2013	2023	2033	Surf. Mtd.	15 3/16	30 3/16	8 1/4	15 3/8	30 3/8	--	--	--	--	--	--	
3015	**3025**	**3035**	Flat Trim	16	32	7 3/4	19 3/8	35 3/8	17	33	7 5/8	18 5/16	34 5/16	8 11/16	Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 & 15, 272
3016	**3026**	**3036**	1 1/4" Square	16	32	7 3/4	19 3/8	35 3/8	17	33	6 5/8	18 5/16	34 5/16	7 11/16	
3017	**3027**	**3037**	2 1/2" Rolled	16	32	7 3/4	19 3/8	35 3/8	17	33	5 3/8*	18 5/16	34 5/16	6 7/16*	
3012	**3022**	**3032**	4" Rolled	16	32	7 3/4	19 3/8	35 3/8	17	33	3 7/8*	18 5/16	34 5/16	4 15/16*	
3018	3028	3038	4 1/2" Rolled	16	32	7 3/4	19 3/8	35 3/8	17	33	3 3/8*	18 5/16	34 5/16	4 7/16*	
3013	3023	3033	Surf. Mtd.	19 3/16	35 3/16	8 1/4	19 3/8	35 3/8	--	--	--	--	--	--	
4015	**4025**	**4035**	Flat Trim	20	27	7 3/4	23 3/8	30 3/8	21	28	7 5/8	22 5/16	29 5/16	8 11/16	Two Each of Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5
4016	**4026**	**4036**	1 1/4" Square	20	27	7 3/4	23 3/8	30 3/8	21	28	6 5/8	22 5/16	29 5/16	7 11/16	
4017	**4027**	**4037**	2 1/2" Rolled	20	27	7 3/4	23 3/8	30 3/8	21	28	5 3/8*	22 5/16	29 5/16	6 7/16*	
4012	**4022**	**4032**	4" Rolled	20	27	7 3/4	23 3/8	30 3/8	21	28	3 7/8*	22 5/16	29 5/16	4 15/16*	
4018	4028	4038	4 1/2" Rolled	20	27	7 3/4	23 3/8	30 3/8	21	28	3 3/8*	22 5/16	29 5/16	4 7/16*	
4013	4023	4033	Surf. Mtd.	23 3/16	30 3/16	8 1/4	23 3/8	30 3/8	--	--	--	--	--	--	

‡ TRIMLESS MODELS FEATURE NEW DESIGN AND MAY BE INSTALLED BEFORE DRYWALL - SEE SUBMITTAL AND INSTALLATION INFORMATION

* ADD 5/8" FOR CABINETS WITH ALUMINUM FRAMES.

**COSMIC 20 & GALAXY 20 EXTINGUISHER MUST BE MOUNTED ON THE BACK OF THE CABINET TUB.

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

CLEAR VU SERIES: Acrylic Bubble Cabinet in Aluminum, Steel, Stainless, Bronze or Brass

Door and Trim Construction: Cold rolled steel with white powder coat finish, #4 stainless steel, clear anodized aluminum, US10 satin bronze, or US3 polished brass. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.
Bubble: Acrylic bubble allows 180º extinguisher visibility. 2 1/2" projection for 1500 Series, 3 1/2" projection for 2500 and 4500 Series.
Trim Style and Depth: Recessed - 3/8" flat trim, Semi-Recessed - 1 1/4", 1 1/2" Square Edge and 2 1/2"or, 3" Rolled Edge. Surface-mount has a square edge or optional rolled edge for steel or stainless steel upon request. 1 3/4" face trim on frame and 1 1/4" trim on door. 2527 rolled edge constructed of aluminum extrusions.
Tub: Constructed of cold rolled steel with white powder-coat finish standard. Extinguisher must be mounted to back of tub using bracket.
Fire-Rated Option Available: Yes

Door Styles
F Full Acrylic w/pull
G Full Acrylic with SAF-T-LOK™

Bubble
25 Clear Acrylic
26 Red Acrylic
27 Bronze Acrylic

Options at Additional Cost
Aluminum Tub for Aluminum Cabinets Only (Non-Rated Use)
Color Painted Tub (Red or Black)
Color Anodized Aluminum – Light, Medium or Dark
Vertical or Horizontal Lettering. See Page 21.
Futura Embossed "Fire" Handle - Mill or White
US 9 Bright Polished Bronze
US 4 Satin Brass
US 10B Dark Oxidized Oil-Rubbed Bronze
Wall Signs and Alarms. See Page 20

TOP VIEW



CLEAR VU
1537G25
WITH SAF-T-LOK™

Door Material and Series #						Tub I.D.			Frame O.D.		Wall Opening: Non-Rated			Wall Opening: FX Option			Accommodates Following Extinguishers
Steel	Aluminum*	Stainless Steel	Bronze	Brass	Trim Style	A	B	C	E	F	W	H	D	W	H	D	
1515	1525	1535	1545	1555	Flat Trim	10 1/2	24	4	13 7/8	27 3/8	11 1/2	25	3 7/8	12 13/16	26 5/16	4 15/16	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5
1516	1526	1536	1546	1556	1 1/2" Square	10 1/2	24	4	13 7/8	27 3/8	11 1/2	25	2 5/8	12 13/16	26 5/16	3 11/16	
1517	1527	1537	1547	1557	3" Rolled	10 1/2	24	4	13 7/8	27 3/8	11 1/2	25	1 1/8	12 13/16	26 5/16	2 3/16	
1513	1523	1533	1543	1553	Surf. Mtd.	13 11/16	27 3/16	4 5/8*	13 7/8	27 3/8	--	--	--	--	--	--	
2515	2525	2535	2545	2555	Flat Trim	14	30	4	17 3/8	33 3/8	15	31	3 7/8	16 5/16	32 5/16	4 15/16	Cosmic & Galaxy 2.5-10, Cosmic 20A, Mercury 2.5-15 (FM11A & 15A), Sentinel 5, Saturn 15-25, Grenadier P
2516	2526	2536	2546	2556	1 1/4" Square	14	30	4	17 3/8	33 3/8	15	31	2 7/8	16 5/16	32 5/16	3 15/16	
2517	2527*	2537	--	--	2 1/2" Rolled	14	30	4	17 3/8	33 3/8	15	31	1 5/8*	16 5/16	32 5/16	2 11/16*	
2513	2523	2533	2543	2553	Surf. Mtd.	17 3/16	33 3/16	4 5/8	17 3/8	33 3/8	--	--	--	--	--	--	
4515	4525	4535	--	--	Flat Trim Double Door	28	30	4	31 3/8	33 3/8	29	31	3 7/8	30 5/16	32 5/16	4 15/16	Two each Cosmic & Galaxy 2.5-10, Mercury 2.5-15 (FM11A & 15A), Sentinel 5, Grenadier P
4513	4523	4533	--	--	Surf. Mtd. Double Door	31 3/16	33 3/16	4 5/8	31 3/8	33 3/8	--	--	--	--	--	--	
Dimensions in Inches																	

*ADD 5/8" TO WALL DEPTH FOR A CABINET WITH AN ALUMINUM FRAME. 4500 SERIES CONSIST OF A DOUBLE DOOR DESIGN.

SMB SERIES: Surface-Mounted Acrylic Bubble and Steel Cabinet

Door and Trim Construction: Cold rolled steel with six standard powder-coated colors to choose from - black, white, red, bronze, brass, silver or gray hammertone. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch. Custom powder-coat finishes available upon request. See page 24.
Bubble: Acrylic bubble allows 180º extinguisher visibility. 2-1/2" projection.
Trim Style and Depth: This surface-mounted cabinet has a 3" rolled edge that forms a tub. 3" deep tub constructed of cold rolled steel with white powder-coat finish standard. 1 3/4" face trim on frame and 1 1/4" trim on door.
Extinguisher: Extinguisher must be mounted to back of tub using bracket.
Fire-Rated Option Available: No
Options at Additional Cost: Vertical or Horizontal Lettering. See Page 21.

SMB-W25
WHITE

SMB-BRA27
BRASS

SMB-H25
GRAY HAMMERTONE

Door Finishes

B	Black
W	White
R	Red
GH	Gray Hammertone
BR	Bronze
BRA	Brass
SI	Silver

Door Glazing
25 Clear Acrylic
26 Red Acrylic
27 Bronze Acrylic

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

Model							Frame Inside Dimensions	Frame Outside Dimensions	Accommodates Following Extinguishers
White	Hammertone	Brass	Bronze	Silver	Red	Black			
SMB-W	SMB-GH	SMB-BRA	SMB-BR	SMB-SA	SMB-R	SMB-B	13 13/16 x 27 5/16	13 15/16 x 27 7/16	Cosmic & Galaxy 2.5-10, Mercury 2.5-5
Dimensions in Inches									

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE EXTINGUISHER CABINETS

EMBASSY SERIES: Decorative Trimless Recessed Cabinet

Door and Trim Construction: These 7/8" formed design cabinet doors are available in # 4 satin stainless steel, US 10 satin bronze, US 3 polished brass, clear anodized aluminum or or white powder coated steel. Doors feature two concealed hinges and concealed handle and roller catch.
Trim Style and Depth: None
Tub: Constructed of cold rolled steel with white powder-coat finish standard.
Unique Options: The 5900 Series is equipped with a shelf 12" from the bottom. Knockouts are located 6" from the bottom and 4 1/4" from the back on both the right- and left-hand sides.
Fire-Rated Option Available: Yes

EMBASSY
5634S21FX2

EMBASSY
5654V15

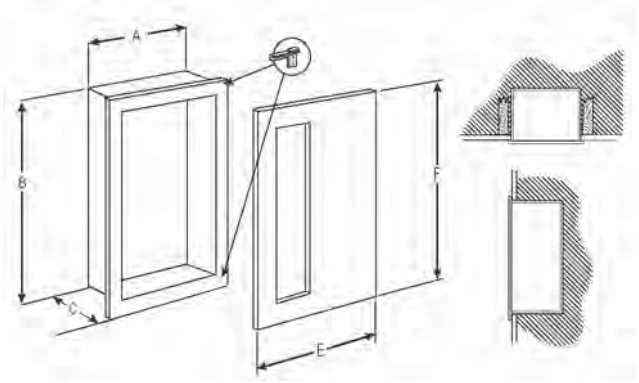

Door Styles
S21 Solid (concealed pull)
V Vertical Duo (concealed pull)
W Vertical Duo with SAF-T-LOK™ and Pull Handle
L22 Solid with SAF-T-LOK™ and Pull Handle

Door Glazing
10 Clear Acrylic
13 Clear Wire Glass w/ Safety Film
15 Bronze Acrylic
16 Gray Acrylic
17 Clear Tempered Glass
18 Laminated Safety Glass

Options at Additional Cost
Color Painted Door or Tub - Steel Only
Vertical or Horizontal Lettering. See Page 21
Futura Embossed "Fire" Handle - Mill or White
Wall Signs and Alarms, See Page 20
Color Anodized Aluminum, See Page 24
Color Anodized Aluminum, See Page 24
#6 Satin, #7 Polished, #8 Mirror Stainless
US9 Polished Bronze Door - Clear Coated
US10B Oil-Rubbed Bronze Door
US4 Satin Brass Door - Clear Coated
Etched Lettering in Glass
Engraved Lettering

Door Material and Series #					Tub I.D.			Door O.D.*		Wall Opening: Non-Rated			Wall Opening: FX Option			Accommodates Following Extinguishers
Steel	Aluminum	Stainless Steel	Bronze	Brass	A	B	C	E	F	W	H	D	W	H	D	
5614	5624	5634	5644	5654	10 1/2	24	5-3/4	12 3/4 13 3/4 FX	26 1/4 27 1/4 FX	11 1/2	25	5 7/8	12 13/16	26 5/16	6 15/16	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5
5714	5724	5734	5744	5754	16	32	7 3/4	18 1/4 19 1/4 FX	34 1/4 35 1/4 FX	17	33	7 7/8	18 5/16	34 5/16	8 15/16	Any Cosmic*, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5-15, 272
Fire Department Valve, Hose & Extinguisher Cabinets																
5514	5524	5534	5544	5554	18	18	7 3/4	20 1/4 21 1/4 FX	20 1/4 21 1/4 FX	19	19	7 7/8	20 5/16	20 5/16	8 15/16	1-1/2" or 2-1/2" Fire Department Valve Left & Right K.O.'s 9" from top, 4" from back** N/A F.R. Cabinets
5814	5824	5834	--	--	32	32	7 3/4	34 1/4 35 1/4 FX	34 1/4 35 1/4 FX	33	33	7 7/8	34 5/16	34 5/16	8 15/16	1-1/2" or 2-1/2" Rack Unit & 2-1/2 " Fire Department Valve or Extinguisher. 2 Left K.O. 4" from back, top & bottom.
5914	5924	5934	5944	5954	16	40	8 3/4	18 1/4 19 1/4 FX	42 1/4 43 1/4 FX	17	41	8 7/8	18 5/16	42 5/16	9 15/16	2-1/2" Fire Department Valve & Fire Extinguisher Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 & 10
Dimensions in Inches																

*COSMIC & GALAXY 20 EXTINGUISHER MUST BE MOUNTED ON THE BACK OF THE CABINET TUB.
**KNOCKOUTS N/A STAINLESS TUBS
ALL MODELS SHOWN ON THIS PAGE ARE ADAC-COMPLIANT

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

CAVALIER SERIES: Decorative Bronze or Brass Cabinet

Door and Trim Construction: Standard finishes are US10 satin bronze or US3 polished brass. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.
Trim Style and Depth: Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 3" Rolled Edge. Surface-mount has a square edge. 1 3/4" face trim on frame and 1 1/4" trim on door.
Tub: Constructed of cold rolled steel with white powder-coat finish standard. Surface mounted models have brass or bronze tubs.
Unique Options: Large selection of Bronze and Brass finishes.
Fire-Rated Option Available: Yes

Door Styles w/pull

F	Full Glazing
G	Full Glazing & SAF-T-LOK™
D	Horizontal Duo Panel
E	Horizontal Duo Panel & SAF-T-LOK™
S21	Solid
L22	Solid with SAF-T-LOK™
L24	Solid with Cylinder Lock & No Handle
B10	Solid with 2" x 4" Acrylic Insert & SAF-T-LOK™
V	Vertical Duo
W	Vertical Duo & SAF-T-LOK™

Door Glazing

10	Clear Acrylic
13	Clear Wire Glass w/ Safety Film
15	Bronze Acrylic
16	Gray Acrylic
17	Clear Tempered Glass
18	Laminated Safety Glass



TOP VIEW

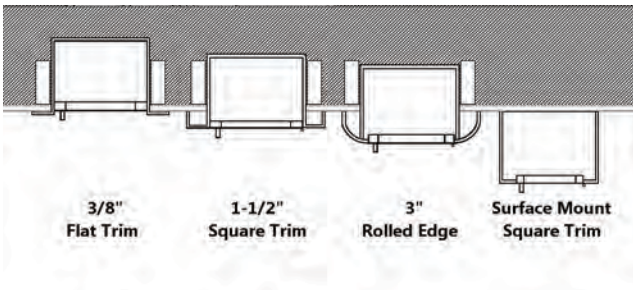

1845W10

1045 WITH CUSTOM US10B FINISH & ENGRAVED/FILLED LETTERING

1047S21

1857V10

Options at Additional Cost
Vertical or Horizontal Lettering - See Page 21
Futura Embossed "Fire" Handle in Mill, White or Red
Pulls - ADA, Bronze, Brass. See page 20
Wall Signs, Labels & Alarms- See Page 20
Panorama-Style Full Acrylic Door - See page 8
Optional Standard Color Frame/Door/Tub - see Page 24
Optional Color tub - see page 24
Etched Glass Lettering See page 21
Bronze: US9 Bright Polished, US10B Oil-rubbed Finishes
Brass: US4 Satin Finish

Trim and Door Material and Series #				Tub I.D.			Trim O.D.*		Wall Opening: Non-Rated			Wall Opening: FX Option			Accommodates Following Extinguishers
US10 Satin Bronze	US10B Oil-rubbed	Brass	Trim Style	A	B	C	E	F	W	H	D	W	H	D	
1845	1885	1855	Flat Trim*	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	5 3/8	12 13/16	26 5/16	6 7/16	Cosmic & Galaxy 2.5-6, Mercury 2.5 & 5
1846	1886	1856	1 1/2" Square*	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	4 1/8	12 13/16	26 5/16	5 3/16	
1847	1887	1857	3" Rolled*	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	2 5/8	12 13/16	26 5/16	3 5/8	
1045	1085	1055	Flat Trim*	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	5 7/8	12 13/16	26 5/16	6 15/16	Cosmic & Galaxy 2.5-10, Mercury 2.5 & 5, Sentinel 5
1046	1086	1056	1 1/2" Square*	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	4 5/8	12 13/16	26 5/16	5 11/16	
1047	1087	1057	3" Rolled*	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	3 1/8	12 13/16	26 5/16	4	
1043	1083	1053	Surf. Mt.	13 11/16	27 3/16	6 1/2	13 7/8	27 3/8	--	--	--	--	--	--	
2045	2085	2055	Flat Trim*	12	27	7 3/4	15 3/8	30 3/8	13	28	7 5/8	14 5/16	29 5/16	8 11/16	Any Cosmic*, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 & 10
2046	2086	2056	1 1/4" Square*	12	27	7 3/4	15 3/8	30 3/8	13	28	6 5/8	14 5/16	29 5/16	7 11/16	
2043	2083	2053	Surf. Mt.	15 3/16	30 3/16	8 1/4	15 3/8	30 3/8	--	--	--	--	--	--	
Dimensions in Inches															

*COSMIC 20 & GALAXY 20 EXTINGUISHER MUST BE MOUNTED ON THE BACK OF THE CABINET TUB.

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE EXTINGUISHER CABINETS

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

CLASSIC SERIES: Economy Galvanized Fire Extinguisher Cabinets

Tub and Door Frame: White powder-coated cabinet rust resistant galvanized steel, or aluminum.
Door: .060 acrylic front for protection from the elements. Breaker bar and lock standard.
Options at Additional Cost: Have cylinder locks keyed alike for protection, optional colors. Wall signs and labels, See Page 21.
Fire-Rated Option: No

Trim and Door Material New Model#			Previous Model Number	Tub I.D.			Wall Opening			Weight lbs. Each	Master pkg.	Accommodates Following Extinguishers
Gal. Steel	Aluminum	Trim Style		W	H	D	W	H	D			
9163Z30	9123Z30	Surf. Mtd.	99G	8 1/2	19 13/16	6 1/4	--	--	--	7	6	Cosmic & Galaxy 2.5-6, Mercury 2.5-5, Sentinel 5
916AZ30	**912AZ30**	2 3/4	**99GT**	8 1/2	19 13/16	6 1/4	9	20 5/16	3 3/4	8	6	
9263Z30	9223Z30	Surf. Mtd.	999G	9 1/2	25 3/4	6 1/4	--	--	--	9	4	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5
926AZ30	**922AZ30**	2 3/4	**999GT**	9 1/2	25 3/4	6 1/4	10	26 1/4	3 3/4	10	4	
936AZ30	932AZ30	4 1/2	104GT	10 1/2	29 3/4	8 1/4	11	30 1/4	4	17	2	Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5
9363Z30	9323Z30	Surf. Mtd.	104G	10 1/2	29 3/4	8 1/4	--	--	--	16	2	

SLIDE TRIM WITH LESS THAN 4" EXPOSURE MEETS ADA REQUIREMENTS.

926AZ30 RECESSED MODEL WITH OPTIONAL FINISH

9163Z30 SURFACE MOUNT MODEL

ECONOMYLINE SERIES: Economy Surface-Mounted

Construction: Gray Hammertone powder coated cabinet cold rolled steel tub or rust-resistant aluminum.
Door: Sliding .060 clear acrylic front with retainer clip. Breaker bar with chain, pre-drilled holes on top lip for padlock.
Options at Additional Cost: Other colors, brass padlock, Abus padlock. Wall signs and labels, See Page 21.
Fire-Rated Option: No

Trim and Door Material New Model #			Previous Model Number	Tub I.D.			Weight lbs. Each	Master pkg.	Accommodates Following Extinguishers
Steel	Aluminum	Trim Style		W	H	D			
5013N20	5023N20	Surf. Mtd.	818	8 1/8	18	5 1/2	5	6	Cosmic & Galaxy 2.5-6, Mercury 2.5-5
5113N20	5123N20	Surf. Mtd.	924	9 1/8	24	5 1/2	7	4	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5
5213N20	5223N20	Surf. Mtd.	1028	10 1/8	28	8 1/4	12.5	2	Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5

ECONOMYLINE 5113N20

ABS SERIES: Durable, Surface-Mounted ABS Plastic

Construction: The ABS Series is constructed of injection-molded ABS plastic for a dent, rust and corrosion-proof protection for your fire extinguishers. These impact-resistant cabinets include brass lock, cover and labels. Volume discounts available upon request.
Note: The height dimension includes padlock tab.
Fire-Rated Option: No

Model	Tub Size	Cabinet Color	Cover Color	Environment	Accommodates Following Extinguishers
	Height, Width, & Depth				
ABS 16RR	16 x 8 1/2 x 5 3/8	Red	Red	Indoor/Outdoor	Cosmic & Galaxy 2.5-5, Mercury 2.5-5
ABS 16RC	16 x 8 1/2 x 5 3/8	Red	Clear	Indoor	
ABS 16WR	16 x 8 1/2 x 5 3/8	White	Red	Indoor	
ABS 16WC	16 x 8 1/2 x 5 3/8	White	Clear	Indoor	
ABS 20RR	19 1/2 x 9 5/8 x 6 3/8	Red	Red	Indoor/Outdoor	Cosmic & Galaxy 2.5-6, Mercury 2.5-5, Sentinel 5
ABS 20RC	19 1/2 x 9 5/8 x 6 3/8	Red	Clear	Indoor	
ABS 20WR	19 1/2 x 9 5/8 x 6 3/8	White	Red	Indoor	
ABS 20WC	19 1/2 x 9 5/8 x 6 3/8	White	Clear	Indoor	
ABS 24RR	23 1/4 x 9 5/8 x 6 3/8	Red	Red	Indoor/Outdoor	Cosmic 2.5-10, Galaxy 2.5-10, Mercury 2.5-5, Mercury 11 (FM11A), Mercury 15 1/2 (FM15A), Sentinel 5
ABS 24RC	23 1/4 x 9 5/8 x 6 3/8	Red	Clear	Indoor	
ABS 24WR	23 1/4 x 9 5/8 x 6 3/8	White	Red	Indoor	
ABS 24WC	23 1/4 x 9 5/8 x 6 3/8	White	Clear	Indoor	

Dimensions in Inches

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

DECORLINE SERIES: Economy Steel or Aluminum

The Decorline Series offers an Economical Solution for Interior or Exterior Applications. Select from a wide range of sizes that will fit most 2-1/2-10 lb extinguishers. Choose from 3" or 4-1/4" Trim or a Surface-mounted Design.

Construction: Cold rolled steel tub (interior) or aluminum (exterior) with white or gray hammertone powder-coat finish.
Trim: Models with trim feature 2" wide trim in either 2.5" or 4.25" depth, depending on model.
Door: Models with "AN" designation have slide in acrylic front secured by clips and tab for lock at top. All other models have door with continuous hinges and either solid door or door with acrylic window.
Fire-rated Option: No
Options at Additional Cost: Brass or Abus Padlock for "AN" models. Optional colors - See page 24. Wall signs and labels - See page 21.

5019G20

521AN20

Trim & Door Material and Series #					Tub I.D.			Frame O.D.		Wall Opening			Accommodates Following Extinguishers
Steel	Aluminum	Prev. Model	Door Style	Trim Style	W	H	D	W	H	W	H	D	
631AN20	--	928X	Slide-in Acrylic Front	3" Trim	9 1/8	28	4 1/2	12 1/8	31	9 1/4	28 1/4	2	Cosmic & Galaxy 2.5-5.5, Mercury 2.5- 5
501AN20	502AN20	818T	Slide-in Acrylic Front w/Breaker Bar	3" Trim	8 1/8	18	5 1/2	11 1/4	21 1/4	9	19	4	Cosmic & Galaxy 2.5-6, Mercury 2.5-5
511AN20	512AN20	924T		3" Trim	9 1/8	24	5 1/2	12 1/8	27	10	25	4	Cosmic & Galaxy 2.5-60, Mercury 2.5-5, Sentinel 5
521AN20	522AN20	1028T		3" Trim	10 1/8	28	8 1/4	13 1/8	31	11	29	6	Any Cosmic, Galaxy, Mercury, Saturn & Grenadier P, Sentinel 5
5218N20	5228N20	1028T4		4.25" Trim	10 1/8	28	8 1/4	13 1/8	31	11	29	4	
5017F20	5027F20	818TDH	Door w/Continuous Hinge, Acrylic Window, Handle	3" Trim	8 1/8	18	5 1/2	11 1/4	21 1/4	9	19	3 1/4	Cosmic & Galaxy 2.5-6, Mercury 2.5-5
5019F20	5029F20	818DH		Surface Mtd.	8 1/8	18	5 1/2	8 1/8	18	--	--	--	
5117F20	5127F20	924TDH		3" Trim	9	23 7/8	5 5/8	12 1/4	27 1/4	10	25	3 1/4	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5
5119F20	5129F20	924DH		Surface Mtd.	9	23 7/8	5 5/8	9 1/8	24	--	--	--	
5017G20	5027G20	818TDL	Door w/Continuous Hinge, Acrylic Window, Handle, Saf-T-Lok	3" Trim	8 1/8	18	5 1/2	11 1/4	21 1/4	9	19	3 1/4	Cosmic & Galaxy 2.5-6, Mercury 2.5-5
5019G20	5029G20	818DL		Surface Mtd.	8 1/8	18	5 1/2	8 1/8	18	--	--	--	
5117G20	5127G20	924TDL		3" Trim	9	23 7/8	5 5/8	12 1/4	27 1/4	10	25	3 1/4	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5
5119G20	5129G20	924DL		Surface Mtd.	9	23 7/8	5 5/8	9 1/8	24	--	--	--	
5017S21	5027S21	818TDHS	Solid Door w/ Continuous Hinge, Handle	3" Trim	8 1/8	18	5 1/2	11 1/4	21 1/4	9	19	3 1/4	Cosmic & Galaxy 2.5-6, Mercury 2.5-5
5019S21	5029S21	818DHS		Surface Mtd.	8 1/8	18	5 1/2	8 1/8	18	--	--	--	
5117S21	5127S21	924TDHS		3" Trim	9	23 7/8	5 5/8	12 1/4	27 1/4	10	25	3 1/4	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5
5119S21	5129S21	924DHS		Surface Mtd.	9	23 7/8	5 5/8	9 1/8	24	--	--	--	
Dimensions in Inches													

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

CORNER VU SERIES: Steel, Stainless Steel and Aluminum Corner-Mount Cabinets

Door and Trim Construction: #4 satin stainless steel, clear anodized aluminum or cold rolled steel with white powder-coat finish standard. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.
Trim Style and Depth: This corner-mounted cabinet is designed to be surface-mounted.
Tub: Cold rolled steel with white powder-coat finish standard.
Fire-Rated Option Available: No

Door Styles w/pull

F	Full Glazing
G	Full Glazing with SAF-T-LOK™
D	Horizontal Duo Panel
S21	Solid
L22	Solid with SAF-T-LOK™
V	Vertical Duo
W	Vertical Duo with SAF-T-LOK™

Door Glazing

10	Acrylic
17	Tempered Glass

Options at Additional Cost
Vertical or Horizontal Lettering - See Page 21
Futura Embossed "Fire" Handle in Mill, White or Red
Wall Signs, Labels & Alarms- See Page 20
Color Anodized Aluminum - See Page 24
Optional Color Frame/Door/Tub - see Page 24
Custom Color Frame/Door/Tub
Engraved Metal or Etched Glass Lettering

CORNER VU
8913F10

Trim and Door Material and Series #				Outer Dimensions			Accommodates Following Extinguishers
Steel	Aluminum	Stainless Steel	Trim Style	W	H	D	
8913	8923	8933	Surf. Mtd.	15 3/4	18	8 1/8	Cosmic & Galaxy 2.5-6, Mercury 2.5-15
8813	8823	8833	Surf. Mtd.	15 3/4	24	8 1/8	Cosmic & Galaxy 2.5-10, Mercury 2.5-15 (FM11C & 15C), Saturn 15, Sentinel 5
Dimensions in Inches							

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE EXTINGUISHER CABINETS

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

NEW FIRE-FX2™ FIRE-RATED CABINETS

- **New UL-Listing**
- **Lightweight Insulation**
- **Lower Shipping Costs**
- **Easier to Install**
- **Patent-Pending**

c UL us LISTED

UL LISTING

Tested to maintain one and two-hour fire rated wall barriers, in accordance with ANSI/ UL-1479 (ASTM E814 and ULC.CAN S115) for membrane penetration firestops.

TO ORDER OR SPECIFY

Just add FX2 option to the end of the seven-digit JL model number. For example, if you want an Ambassador 1017F10 with the fire rated option, ask for the **1017F10FX2**.

NEW FX2 WALL OPENINGS IN 2015

Are slightly larger than the previous FX wall openings to accomodate FIRE-FX2™. See website for updated catalogs and submittals with new wall openings.

See page 3 for more information on the FIRE-FX2tm

Look for the Red FX2 Symbol!

SM SERIES: Economical Surface-Mount Aluminum Cabinet

SM6773J

Construction: All aluminum with white powder coat finish standard. Cabinet is hinged on top and plexiglass front slides in.
Door: Full Breakaway Plexiglass, with center pull handle and tamperproof security screws.
Options: Other colors - see page 24. TSHS Spanner Tool Head Screwdriver. Wall Signs and Labels - see page 21.
Fire-Rated Option: No

Door Styles

J Center Pull Handle w/ Tamperproof Screws
G Center Pull Handle w/ Cylinder Lock

Door Glazing

30 Clear Plexiglass

Model #	Previous Model #	Depth of Cabinet	Frame O.D.			Glazing Size		Master Pack	Accommodates Following Extinguishers
			W	H	Projection	W	H	Number	
9123	6473	6	8 1/2	20	6 1/4	7 3/4	18 11/16	5	Cosmic & Galaxy 2.5-5.5, Mercury 2.5-5
9223	6573	6	9 1/2	25 3/4	6 1/4	8 3/4	24 1/2	5	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5
6773	SM-20	7 13/16	11	28	8 3/4	10 1/4	27 9/16	1	Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5
6973	SM-30	9 1/16	14	30	10	13 1/4	29 7/8	1	Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5-15, 272

Dimensions in Inches

FB SERIES: FIBERGLASS FIRE EXTINGUISHER CABINET

Construction: Door and tub are UV-resistant fiberglass with high-visibility red finish and 5" x 9" Fire Extinguisher Lettering
Door: Gasketed door with 6" x 9" Gasketed view window and corrosion-resistant aluminum handle. All cabinets come standard with a full-length stainless steel hinge attached by rivets. Door is tightly latched against the silicone gasket by (2) stainless steel snap latches.
Fire-Rated Option: No

Model	Tub Size I.D.			Outside Dimensions			Fire Extinguishers
	W	H	D	W	H	D	
1363D12	12-1/2"	24"	8-1/2"	16"	27"	10.25	Any Cosmic, Galaxy, Mercury, Saturn 15, Grenadier , Sentinel 5-10

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

SECURITY AND DETENTION CABINETS

JL security and detention cabinets for fire extinguishers, fire hoses or fire department valves are constructed to meet maximum security requirements in areas where fire protection is required. All recessed models have heavy-duty masonry anchors welded to the frame.

Door, Tub and Trim: 12 gauge steel with white powder coat finish, or 14 gauge #4 satin stainless finish. Flush cabinet doors are mounted in a 1" door stop and attached by a heavy-duty continuous hinge. Choose from 3 standard lock preps, or see lock options below for more choices.
Trim Style and Depth: 1-1/4" trim on frame non-rated, 1-1/2" trim on fire-rated frames. Available in Recessed with flat trim, Semi-recessed with 2-1/2" square trim or Surface-mount model with square edge. Heavy duty masonry anchors are welded to frame on all recessed cabinets.
Lock: Detention deadlock prep (DDP) provided standard. Optional lock preps at no charge are detention deadlock prep (DDP) or mortise cylinder prep (MCP).
Fire-Rated Option Available: Yes.
Options At Additional Cost: Vertical or Horizontal Lettering Pg. 21, Optional Colors for Steel Cabinets. See Pg 24.
Lock Options At Additional Cost: Installed detention deadlock, slam lock, or mortise cylinder. Mortise deadbolt prep (MDP) or with lock installed.

SFC 15
W/DETENTION DEADBOLT

SSFC-37 W/
DETENTION DEADBOLT

SVC-13 W/OPTIONAL COLOR

TRIM & DO OR MATERIAL & SERIES			TUB I.D.			*FRAME O.D.		WALL OPENING NON-RATED			WALL OPENING FX OPTION			RECOMMENDED EXTINGUISHER, HOSE & RACK
STEEL	STAINLESS	TRIM STYLE	W	H	D	W	H	W	H	D	W	W	D	
SECURITY FIRE EXTINGUISHER CABINETS (SFC)														
SFC-11	SSFC-31	Flat Trim	10 1/2	24	7	12 1/2	26	11 1/2	25	7 1/2	12 1/2	26 1/2	8	Cosmic & Galaxy 2.5-10, Mercury 2.5 & 5**
SFC-12	SSFC-32	2-1/2" Sqr. Trim	10 1/2	24	7	12-1/2	26	11 1/2	25	5	12 1/2	26 1/2	5 1/2	
SFC-13	SSFC-33	Surface Mt. Sq.	13	26-1/2	8	13	26 1/2	--	--	--	--	--	--	
SFC-15	SSFC-35	Flat Trim	12	27	8 1/2	14	29	13	28	9	14	29 1/2	9 1/2	Cosmic & Galaxy 2.5-20, Mercury 2.5-15, Saturn 5, Sentinel 5**
SFC-16	SSFC-36	2-1/2" Sqr. Trim	12	27	8 1/2	14	29	13	28	6-1/2	14	29 1/2	7	
SFC-17	SSFC-37	Surface Mt. Sq.	14 1/2	29 1/2	10	14 1/2	29 1/2	--	--	--	--	--	--	
SECURITY VALVE CABINETS (SVC)														
SVC-11	SSVC-31	Flat Trim	18	18	8 1/2	20	20	19	19	9	20	20 1/2	9 1/2	1-1/2" or 2-1/2" Fire Department Valve Knockouts 11 & 31: 2 each side - 5" from top, bottom and back. 12 & 32: 2 each side - 4.5" from top, bottom and back, Not Available on F.R. Cabinets
SVC-12	SSVC-32	2-1/2" Sqr Trim	18	18	8 1/2	20	20	19	19	6 1/2	20	20 1/2	7	
SVC-13	SSVC-33	Surface Mt. Sq.	20 1/2	20 1/2	10	20 1/2	20 1/2	--	--	--	--	--	--	
SECURITY HOSE CABINETS (SHC)														
SHC-11	SSHC-31	Flat Trim	32 3/4	34 3/4	8	34 3/4	36 3/4	33 3/4	35 3/4	8 1/2	34 3/4	36 3/4	9	1-1/2" or 2-1/2" Hose Rack, & Extinguisher, or Fire Department Valve & Extinguisher Knockouts: 2 each side - 4" from top bottom and back, N/A on F.R. Cabinets
SHC-12	SSHC-32	2-1/2" Sqr. Trim	32 3/4	34 3/4	8	34 3/4	36 3/4	33 3/4	35 3/4	6	34 3/4	36 3/4	6 1/2	
SHC-13	SSHC-33	Surface Mt. Sq.	36 3/4	38 3/4	8	36 3/4	38 3/4	--	--	--	--	--	--	
Dimensions in Inches														

* FIRE RATED CABINETS - ADD 1" TO FRAME OD
**USE JL EXTINGUISHERS ONLY IN THIS CABINET.

SCHOOL CABINETS

Door and Trim: 12 gauge steel or 14 gauge stainless steel door with tempered glass is mounted in a 5/8" door stop, attached by a continuous hinge and equipped with zinc-plated handle.
Trim Style: Recessed - Flat Trim. Surface mount and semi-recessed models have a square edge.
Tub: 16 gauge steel with white powder-coated primer. Stainless steel models have stainless tub. Masonry anchors standard.
Options at Additional Cost: Duo panel or solid door, polycarbonate glazing, ADA pull, SAF-T-LOK, lettering - see page 21.
Fire-Rated Option Available: Yes

SCHOOL CABINET
CS2015F

Model		Tub I.D.			*Frame O.D.		Wall Opening: Non-Rated			Wall Opening: FX Option			Accommodates Following Extinguishers
Steel	Trim Style	W	H	D	W	H	W	H	D	W	H	D	
CS2015	Flat Trim	12	27	7 3/4	14	29	13	28	8	14	29	8 3/4	Any Cosmic, Galaxy, Mercury, Saturn & Grenadier P, Sentinel 5-10
CS2017	2 1/2 Square	12	27	7 3/4	14	29	13	28	5 1/2	14	29	6 1/2	
CS2013	Surf. Mtd.	14 1/2	29 1/2	8	14 1/2	29 1/2	--	--	--	--	--	--	
Dimensions in Inches													

*FIRE RATED CABINETS - ADD 1" TO FRAME OD.

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

FREESTANDING AED CABINET STAND: 1480 SERIES

This Decorative Stand with a Surface-Mount Steel or Aluminum Cabinet can be an Attractive Addition to a Building's Décor by Coordinating Finishes and Paint Colors.

Construction: 52" structural steel tubing and steel baseplate. White epoxy or silver metallic finish standard, with custom colors also available.

DUAL CABINET FOR AED AND EMERGENCY OXYGEN: OLYMPUS 1900 SERIES

1913F12

Provide More Lifesaving Equipment by Including Emergency Oxygen with Your AED.

Door & Trim Construction: CRS with white powder-coat finish, #4 stainless steel or clear anodized aluminum. 1-3/4" trim on face and door, mounted in a 5/8" door stop and attached by a continuous hinge. All models feature a clear acrylic window with graphics, zinc-plated handle and roller catch.

Trim Style & Depth: Surface-mount has a square edge. Recessed – 3/8" flat trim, Semi-Recessed – 1-1/2" square edge or 3" rolled edge.

Alarm: 85 db Commander (audible) alarm standard.

Oxygen: Accommodates up to "D" size cylinder. Available with patented T^XO^2 oxygen system that features easy-to use automatic flow system.

Tub: White powder coated CRS. Fire-rated option available.

WEATHER-RESISTANT AED CABINETS: 1463 SERIES

1463

Protect Your AED From Moisture and Dust with this Durable Surface-Mount Cabinet.

Construction: This AED cabinet is constructed of galvanized steel and powder coated for a durable, water resistant finish. Stainless steel turn handle and fully gasketed.

AUTOMATED EXTERNAL S-AED SERIES DEFIBRILLATORS

All Defibrillators Meet Local and National Standards for Emergency Care in Public Places and are FDA-Approved. JL has Several Models Available Which All Feature Automatic Heartbeat Detection, Require Minimum Training to Operate and Include a Training Video.

AED CABINETS TO FIT MOST BRANDS: 1400 LIFESTART SERIES

1413F12SA

Designed to Accommodate Most AED's on the Market Today.

Door & Trim Construction: CRS with white powder-coat finish, #4 stainless steel or clear anodized aluminum. 1-3/4" trim on face. Formed door with 1-3/4" trim, mounted in a 5/8" door stop with zinc-plated handle and roller catch and continuous hinge. View AED through a clear acrylic window with graphics.

Trim Style & Depth: Surface-mount has a square edge. Recessed – 3/8" flat trim, Semi-Recessed – 1-1/2" square edge or 3" rolled edge.

Alarm: 85 db Commander (audible) alarm standard.

Tub: White powder-coated CRS. Fire-rated available.

METAL AED CABINET OPTIONS AND ACCESSORIES

Siren Strobe Alarm and 85 db Alarm for 3" and surf mtd.(9V battery) (SA)
Alarm Connectivity Switch: Magnetic Door contact (14MAG) or Roller Reed Contact (14RR).
Optimal door styles - most FEC styles available.
Saf-T-Clasp for Visual Notification if Door has been Opened (14STC)
Custom Door Graphics
AED Wall Signs
Architectural Bronze or Brass
Custom Sizes & Paint Colors
Fire-Rated Recessed Cabinet - FX2



Lifestart Series for Any Brand AED

Trim and Door Material and Series #				Tub I.D.			Frame O.D.		Wall Opening Non-Rated			Wall Opening Fire-Rated Option		
Steel	Aluminum	Stainless Steel	Trim Style	A	B	C	E	F	W	H	D	W	H	D
1415F12	1425F12	1435F12	3/8" Flat Trim	14"	14"	6 3/4"	17 3/8"	17 3/8"	15 1/4"	15 1/4"	6 1/2"	16 5/16"	16 5/16"	7 11/16
1416F12	1426F12	1436F12	1 1/2" Square	14"	14"	6 3/4"	17 3/8"	17 3/8"	15 1/4"	15 1/4"	5 7/8"	16 5/16"	16 5/16"	6 7/16
1417F12	1427F12	1437F12	3"or 2 1/2" Rolled	14"	14"	6 3/4"	17 3/8"	17 3/8"	15 1/4"	15 1/4"	3 3/4*"	16 5/16"	16 5/16"	4 15/16*
1413F12	1423F12	1439F12	Surf. Mtd.	17 3/16"	17 3/16"	7"	17 3/8"	17 3/8"	–	–	–	–	–	–

* Model 1427 has 2-1/2" trim & requires 5/8" deeper wall opening

The New Side-by-Side Olympus Series for AED & Extinguisher or Oxygen

Trim and Door Material and Series #				Tub I.D.			Frame O.D.		Wall Opening Non-Rated			Wall Opening Fire-Rated Option		
Steel	Aluminum	Stainless Steel	Trim Style	W	H	D	E	F	W	H	D	W	H	D
1915F12	1925F12	1935F12	3/8" Flat Trim	18"	18"	8"	21 3/8"	21 3/8"	19"	19"	8"	20 5/16"	20 5/16"	8 15/16
1916F12	1926F12	1936F12	1 1/2" Square	18"	18"	8"	21 3/8"	21 3/8"	19"	19"	6 7/8"	20 5/16"	20 5/16"	7 11/16
1917F12	1927F12	1937F12	3" Rolled	18"	18"	8"	21 3/8"	21 3/8"	19"	19"	5 3/4"*	20 5/16"	20 5/16"	6 3/16*
1913F12	1923F12	1939F12	Surf. Mtd.	21 3/16"	21 3/16"	8 1/2"	21 3/8"	21 1/8"	–	–	–	–	–	–

* Model 1927 has 2-1/2" trim & requires 5/8" deeper wall opening

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE HOSE EQUIPMENT CABINET

This durable Storage Cabinet has CRS Steel or Galvanized Steel Construction for Interior or Exterior Use. The top is angled with a 3" overhang to shed water.

Construction: 16 gauge galvanized or cold rolled steel construction. Both are finished with red powder-coat paint and features shelf and louvers on both sides of cabinet for ventilation. Top is slightly angled and overhangs the doors by 2-7/8". Optional 12"H legs.
Hardware: Hasp for a padlock (by others) standard.
Size: 58" W x 42" H x 18 1/2" D
Options: DFFH or 1403 "Fire Hose" Decal, Locking chrome handle with top & bottom latching. (must be ordered with cabinet in order to install rod latching system)
Models:
HECIG: Galvanized
HECIGL: Galvanized with Legs
HECIR: Steel
HECIRL: Steel with Legs

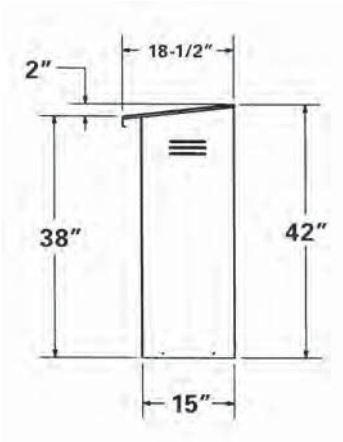

HECIGL OR HECIRL

HECIG OR HECIR

3000, 3100 AND 3200 SERIES: Fire Hose Rack Assembly

Operation: One-man operation for immediate means of fire control.
Ratings: 100 GPM at 65 PSI at the nozzle. Hose is FM-approved, Industrial Fog Nozzle, Angle Valve and Pin Rack are UL-rated. Models 3005-3110 rated for Class II Service under NFPA/FEMA Class of service. Models 3205-3212 rated for CLass II and Class III Service under NFPA/FEMA Class of service.



Model #	Hose Length	Hose Diameter	Hose Type	Valve Size	Rack Length	Class of Service	Stored Height of Hose	Width of Rack	Height from Hose Top to Valve Center	Overall Width of Stored Unit to Valve Center
Basic Unit For 1 1/2" Hose and Valve with Single Jacket Lined Hose, Industrial Fog Nozzle, Red Enamel Pin Rack and Cast Brass Coupling, Angle Valve, Escutcheon and Nipple										
3005	50'	1 1/2"	Poly Lined Hose	1 1/2"	17 7/8	II	23	4 1/8	3 7/8	19 3/4
3007	75'	1 1/2"		1 1/2"	17 7/8	II	23	4 1/8	3 7/8	19 3/4
3010	100'	1 1/2"		1 1/2"	17 7/8	II	23	4 1/8	3 7/8	19 3/4
Basic Unit Above, with Red Enamel Rack, Chrome-plated Brass Fittings and Chrome-plated Rough Brass Valve										
3105	50'	1 1/2"	Poly Lined Hose	1 1/2"	17 7/8	II	23	4 1/8	3 7/8	19 3/4
3107	75'	1 1/2"		1 1/2"	17 7/8	II	23	4 1/8	3 7/8	19 3/4
3110	100'	1 1/2"		1 1/2"	17 7/8	II	23	4 1/8	3 7/8	19 3/4
Basic Unit For 1 1/2" Hose and 2 1/2" Valve with Single Jacket Lined Hose, Industrial Fog Nozzle, Red Enamel Pin Rack and Cast Brass Coupling, Angle Valve, Reducer, Escutcheon and Nipple										
3205	50'	1 1/2	Poly Lined Hose	2 1/2"	17 7/8	II and III	23	4 1/8	4 1/8	20 1/16
3207	75'	1 1/2		2 1/2"	17 7/8	II and III	23	4 1/8	4 1/8	20 1/16
3210	100'	1 1/2		2 1/2"	17 7/8	II and III	25	4 1/8	4 1/8	20 1/16
3212	125'	1 1/2		2 1/2"	17 7/8	II and III	28	4 1/8	4 1/8	20 1/16
SEE CROWNLINE SERIES FOR CABINETS TO FIT FIRE HOSE RACK ASSEMBLIES										
Dimensions in Inches										

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE HOSE AND VALVE CABINETS

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

CROWNLINE 6000-7200 SERIES: Cabinets for Fire Hoses and Extinguishers
CROWNLINE 8000 SERIES: Cabinets for Fire Department Valves

Door and Trim: #4 stainless steel, clear anodized aluminum or cold rolled steel with white powder-coat finish standard. 1 ¾" face trim on frame and 1 ¼" trim on door. These flush cabinet doors are mounted in a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch for all non-break glazed doors.
Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-recessed 1 ¼" Square Edge or 2 ½" Rolled Edge. Rolled edge aluminum trim is formed of extrusions. Surface mount steel and aluminum have square edge, stainless models have rolled edge with galvanized back wall. Tub of steel and aluminum surface-mounted models are same material as trim.
Tub: White powder-coated cold rolled steel. Surface-mounted stainless steel models feature a galvanized back panel.
Fire-Rated Option Available: Yes

6517V10
SHOWN IN OPTIONAL RED FINISH

6337F10

6325A10
WITH SAF-T-LOK™

6514B10FX2
WITH SAF-T-LOK™

8016F10

Door Styles with Pull

F	Full Glazing
G	Full Glazing & Saf-t-Lok™
D	Horizontal Duo Panel
E	Horizontal Duo Panel & Saf-T-Lok™
S21	Solid
L22	Solid with SAF-T-LOK™
L24	Solid with Cylinder Lock & No Handle
B10	Solid with Acrylic Insert & Saf-T-Lok™
V	Vertical Duo
W	Vertical Duo & Saf-T-Lok™
A	Center Duo Panel with Saf-T-Lok™

Door Glazing

10	Clear Acrylic
13	Clear Wire Glass w/Safety Film
15	Bronze Acrylic
16	Gray Acrylic
17	Tempered Glass
18	Laminated Safety Glass

Options at Additional Cost

Aluminum Tub for Non-Rated Use
Vertical or Horizontal Lettering - Pg 21
Futura Embossed "Fire" Handle in Mill, White or Red
ADA Flush Pull
Stainless Steel Tub #4 Satin Finish (Knockouts not available)
Wall Signs & Labels - Pg 21
Color Anodized Aluminum - Pg 24
Optional Standard Color Frame/Door/Tub - Pg 24
Custom Color Frame/Door/Tub
Alarms - Pg 20
Engraved Metal or Etched Glass Lettering Pg. 21
Break Glass Hammer & Chain
Custom Stainless Finishes # 6 Satin, #7 Polished, #8 Mirror
Brass or Bronze Finishes - See Embassy Series Pg. 10
12 Gauge Security Cabinets - See Pg. 15

TOP VIEW

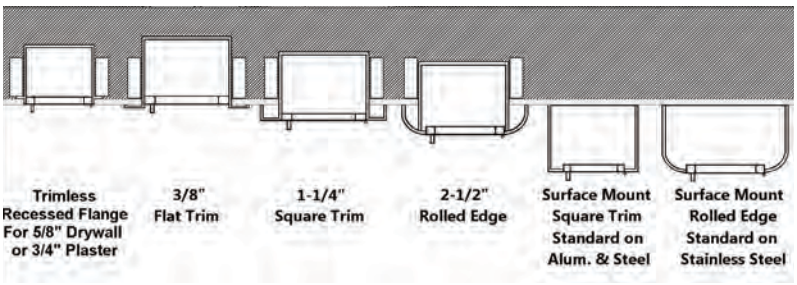

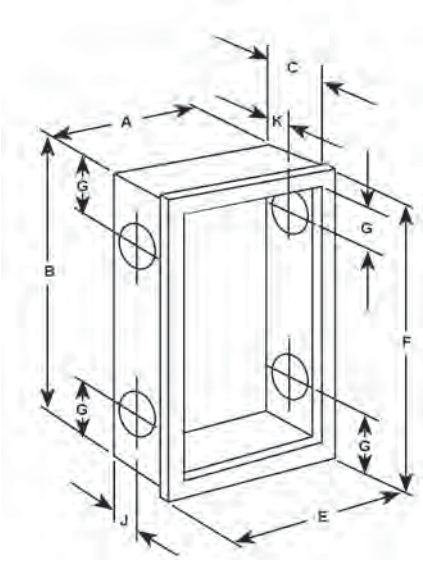

Knockouts: Hose Hose Cabinet Knockouts for Recessed and Semi-Recessed Models: Knockouts (K.O.s) are provided centered, one, side, top and bottom—other side offset, top and bottom. Cabinets with 6" depth will have K.O.'s centered. Trimless K.O.s centered only—no offset. For suface-mount cabinets knockouts are provided only when exact location is known. **See submittal for K.O. locations of each model**.

K.O.s are not provided on FIRE-FX2 cabinets or stainless tubs. Instructions for the knockouts in the field are provided and must be strictly adhered to maintain fire-rating. 8000 series cabinets can be ordered without shelf to allow for lower mounting height of valves piping to meet NFPA10.

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE HOSE AND VALVE CABINETS

Trim and Door Material and Series Number				Tub I.D.			Frame O.D.		Wall Opening: Non-Rated			Wall Opening: Fire-Rated			Recommended Hose Rack and Extinguishers
Steel	Aluminum	Stainless Steel**	Trim Style	A	B	C	E	F	W	H	D	W	H	D	
Hose with Extinguisher or FD Valve Cabinets															
6014	6024	6034	Trimless 5/8" Drywall ‡	24	30	6	27 1/8	33 1/8	25	31	6 1/8	26 5/16	32 5/16	6 11/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit -50 or 75' Hose (3005, 3105, 3007, 3107) & Cosmic 2 1/2 or Galaxy 2 1/2 - 5 lb Extinguisher
6015	6025	6035	Flat Trim	24	30	6	27 3/8	33 3/8	25	31	5 7/8	26 5/16	32 5/16	6 15/16	
6016	6026	6036	1 1/4" Square	24	30	6	27 3/8	33 3/8	25	31	4 7/8	26 5/16	32 5/16	5 15/16	
6017	6027	6037	2 1/2" Rolled	24	30	6	27 3/8	33 3/8	25	31	3 5/8*	26 5/16	32 5/16	4 11/16*	
6013	6023	6039	Surf. Mtd.	27 3/16	33 3/16	6 1/2	27 3/8	33 3/8	--	--	--	--	--	--	
6214	6224	6234	Trimless 5/8" Drywall ‡	24	34 3/4	6	27 1/8	37 7/8	25	35 3/4	6 1/8	26 5/16	32 5/16	6 11/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit - 100' Hose (3010 or 3110) & Cosmic 2 1/2 or Galaxy 2 1/2 - 5 lb Extinguisher
6215	6225	6235	Flat Trim	24	34 3/4	6	27 3/8	38 1/8	25	35 3/4	5 7/8	26 5/16	37 1/16	6 15/16	
6216	6226	6236	1 1/4" Square	24	34 3/4	6	27 3/8	38 1/8	25	35 3/4	4 7/8	26 5/16	37 1/16	5 15/16	
6217	6227	6237	2 1/2" Rolled	24	34 3/4	6	27 3/8	38 1/8	25	35 3/4	3 5/8*	26 5/16	37 1/16	4 11/16*	
6213	6223	6239	Surf. Mtd.	27 3/16	37 15/16	6 1/2	27 3/8	38 1/8	--	--	--	--	--	--	
6114	6124	6134	Trimless 5/8" Drywall ‡	24	30	8	27 1/8	33 1/8	25	31	8 1/8	26 5/16	32 5/16	8 11/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 50 or 75' Hose (3205, 3207)
6115	6125	6135	Flat Trim	24	30	8	27 3/8	33 3/8	25	31	7 7/8	26 5/16	32 5/16	8 15/16	
6116	6126	6136	1 1/4" Square	24	30	8	27 3/8	33 3/8	25	31	6 7/8	26 5/16	32 5/16	7 15/16	
6117	6127	6137	2 1/2" Rolled	24	30	8	27 3/8	33 3/8	25	31	5 5/8*	26 5/16	32 5/16	6 11/16*	
6113	6123	6139	Surf. Mtd.	27 3/16	33 3/16	8 1/2	27 3/8	33 3/8	--	--	--	--	--	--	
6414	6424	6434	Trimless 5/8" Drywall ‡	24	34 3/4	8	27 1/8	37 7/8	25	35 3/4	8 1/8	26 5/26	37 1/16	8 11/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 100' Hose (3210 Series)
6415	6425	6435	Flat Trim	24	34 3/4	8	27 3/8	38 1/8	25	35 3/4	7 7/8	26 5/16	37 1/16	8 15/16	
6416	6426	6436	1 1/4" Square	24	34 3/4	8	27 3/8	38 1/8	25	35 3/4	6 7/8	26 5/16	37 1/16	7 15/16	
6417	6427	6437	2 1/2" Rolled	24	34 3/4	8	27 3/8	38 1/8	25	35 3/4	5 5/8*	26 5/16	37 1/16	6 11/16*	
6413	6423	6439	Surf. Mtd.	27 3/16	37 15/16	8 1/2	27 3/8	38 1/8	--	--	--	--	--	--	
6614	6624	6634	Trimless 5/8" Drywall ‡	24	38 3/4	8	27 1/8	41 7/8	25	39 3/4	8 1/8	26 5/16	41 1/16	8 11/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 125' Hose (3212 Series)
6615	6625	6635	Flat Trim	24	38 3/4	8	27 3/8	42 1/8	25	39 3/4	7 7/8	26 5/16	41 1/16	8 15/16	
6616	6626	6636	1 1/4" Square	24	38 3/4	8	27 3/8	42 1/8	25	39 3/4	6 7/8	26 5/16	41 1/16	7 15/16	
6617	6627	6637	2 1/2" Rolled	24	38 3/4	8	27 3/8	42 1/8	25	39 3/4	5 5/8*	26 5/16	41 1/16	6 11/16*	
6613	6623	6639	Surf. Mtd.	27 3/16	41 15/16	8 1/2	27 3/8	42 1/8	--	--	--	--	--	--	
6314	6324	6334	Trimless 5/8" Drywall ‡	30	30	8	33 1/8	33 1/8	31	31	8 1/8	32 5/16	32 5/16	8 11/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve , Unit Plus An Extinguisher (Except Sentinel 10-20, 272)
6315	6325	6335	Flat Trim	30	30	8	33 3/8	33 3/8	31	31	7 7/8	32 5/16	32 5/16	8 15/16	
6316	6326	6336	1 1/4" Square	30	30	8	33 3/8	33 3/8	31	31	6 7/8	32 5/16	32 5/16	7 15/16	
6317	6327	6337	2 1/2" Rolled	30	30	8	33 3/8	33 3/8	31	31	5 5/8*	32 5/16	32 5/16	6 11/16*	
6313	6323	6339	Surf. Mtd.	33 3/16	33 3/16	8 1/2	33 3/8	33 3/8	--	--	--	--	--	--	
6514	6524	6534	Trimless 5/8" Drywall ‡	32 3/4	34 3/4	8	35 7/8	37 7/8	33 3/4	35 3/4	8 1/8	35 1/16	37 1/16	8 11/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve , 100' Hose Rack Unit Plus FD Valve or Extinguisher (Not Sentinel 20, 272)
6515	6525	6535	Flat Trim	32 3/4	34 3/4	8	36 1/8	38 1/8	33 3/4	35 3/4	7 7/8	35 1/16	37 1/16	8 15/16	
6516	6526	6536	1 1/4" Square	32 3/4	34 3/4	8	36 1/8	38 1/8	33 3/4	35 3/4	6 7/8	35 1/16	37 1/16	7 15/16	
6517	6527	6537	2 1/2" Rolled	32 3/4	34 3/4	8	36 1/8	38 1/8	33 3/4	35 3/4	5 5/8*	35 1/16	37 1/16	6 11/16*	
6513	6523	6539	Surf. Mtd.	35 15/16	37 15/16	8 1/2	36 1/8	38 1/8	--	--	--	--	--	--	
7214	7224	7234	Trimless 5/8" Drywall ‡	32 3/4	38 3/4	8	35 7/8	41 7/8	33 3/4	39 3/4	8 1/8	35 1/16	41 1/16	8 11/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve , 125' Hose Rack Unit Plus FD Valve or Extinguisher (Not Sentinel 20, 272)
7215	7225	7235	Flat Trim	32 3/4	38 3/4	8	36 1/8	42 1/8	33 3/4	39 3/4	7 7/8	35 1/16	41 1/16	8 15/16	
7216	7226	7236	1 1/4" Square	32 3/4	38 3/4	8	36 1/8	42 1/8	33 3/4	39 3/4	6 7/8	35 1/16	41 1/16	7 15/16	
7217	7227	7237	2 1/2" Rolled	32 3/4	38 3/4	8	36 1/8	42 1/8	33 3/4	39 3/4	5 5/8*	35 1/16	41 1/16	6 11/16*	
7213	7223	7239	Surf. Mtd.	35 15/16	41 15/16	8 1/2	36 1/8	42 1/8	--	--	--	--	--	--	
Fire Department Cabinets															
8514	8524	8534	Trimless 5/8" Drywall ‡	18	18	8	21 /8	21 1/8	19	19	8 1/8	20 5/16	20 5/16	8 11/16	FIRE DEPARTMENT VALVE 1-1/2" or 2-1/2" Fire Department Valve with Cap and Chain
8515	8525	8535	Flat Trim	18	18	8	21 3/8	21 3/8	19	19	7 7/8	20 5/16	20 5/16	8 15/16	
8516	8526	8536	1 1/4" Square	18	18	8	21 3/8	21 3/8	19	19	6 7/8	20 5/16	20 5/16	7 15/16	
8517	8527	8537	2 1/2" Rolled	18	18	8	21 3/8	21 3/8	19	19	5 5/8*	20 5/16	20 5/16	6 11/16*	
8513	8523	8539	Surf. Mtd.	21 3/16	21 3/16	8 1/2	21 3/8	21 3/8	--	--	--	--	--	--	
8414	8424	8434	Trimless 5/8" Drywall ‡	18	18	10	21 1/8	21 1/8	19	19	10 1/8	20 5/16	20 5/16	8 11/16	
8415	8425	8435	Flat Trim	18	18	10	21 3/8	21 3/8	19	19	9 7/8	20 5/16	20 5/16	10 15/16	
8416	8426	8436	1 1/4" Square	18	18	10	21 3/8	21 3/8	19	19	8 7/8	20 5/16	20 5/16	9 15/16	
8417	8427	8437	2 1/2" Rolled	18	18	10	21 3/8	21 3/8	19	19	7 5/8*	20 5/16	20 5/16	8 11/16*	
8413	8423	8439	Surf. Mtd.	21 3/16	21 3/16	10 1/2	21 3/8	21 3/8	--	--	--	--	--	--	
8714	8724	8734	Trimless 5/8" Drywall ‡	26	26	8	29 1/8	29 1/8	27	27	8 1/8	28 5/16	28 5/16	8 11/16	DUAL SIDE BY SIDE FIRE DEPARTMENT VALVE & EXTINGUISHER OR 2 FIRE DEPARTMENT VALVES: 1-1/2" or 2-1/2" Fire Department Valve with Cap and Chain Plus Extinguisher - Cosmic & Galaxy 2 1/2 - 10, Mercury 2 1/2 - 11, Grenadier, Saturn 15-25, Sentinel 5
8715	8725	8735	Flat Trim	26	26	8	29 3/8	29 3/8	27	27	7 7/8	28 5/16	28 5/16	8 15/16	
8716	8726	8736	1 1/4" Square	26	26	8	29 3/8	29 3/8	27	27	6 7/8	28 5/16	28 5/16	7 15/16	
8717	8727	8737	2 1/2" Rolled	26	26	8	29 3/8	29 3/8	27	27	5 5/8*	28 5/16	28 5/16	6 11/16*	
8713	8723	8739	Surf. Mtd.	29 3/16	29 3/16	8 1/2	29 3/8	29 3/8	--	--	--	--	--	--	
8614	8624	8634	Trimless 5/8" Drywall ‡	26	26	10	29 1/8	29 1/8	27	27	10 1/8	28 5/16	28 5/16	10 11/16	
8615	8625	8635	Flat Trim	26	26	10	29 3/8	29 3/8	27	27	9 7/8	28 5/16	28 5/16	10 15/16	
8616	8626	8636	1 1/4" Square	26	26	10	29 3/8	29 3/8	27	27	8 7/8	28 5/16	28 5/16	9 15/16	
8617	8627	8637	2 1/2" Rolled	26	26	10	29 3/8	29 3/8	27	27	7 5/8*	28 5/16	28 5/16	8 11/16*	
8613	8623	8639	Surf. Mtd.	29 3/16	29 3/16	10 1/2	29 3/8	29 3/8	--	--	--	--	--	--	
8014	8024	8034	Trimless 5/8" Drywall ‡	16	40	9	19 1/8	43 1/8	17	41	9 1/8	18 5/16	42 5/16	9 11/16	DUAL EXTINGUISHER CABINET WITH SHELF: Extinguisher or Fire Dept. Valve - Shelf located 12" from bottom of cabinet - Any Extinguisher Except Sentinel 15-20, 272
8015	8025	8035	Flat Trim	16	40	9	19 3/8	43 3/8	17	41	8 7/8	18 5/16	42 5/16	9 15/16	
8016	8026	8036	1 1/4" Square	16	40	9	19 3/8	43 3/8	17	41	8 1/8	18 5/16	42 5/16	8 15/16	
8017	8027	8037	2 1/2" Rolled	16	40	9	19 3/8	43 3/8	17	41	6 5/8*	18 5/16	42 5/16	7 11/16*	
8013	8023	8039	Surf. Mtd.	19 3/16	43 3/16	9 1/2	19 3/8	43 3/8	--	--	--	--	--	--	

Dimensions in Inches

FOR KNOCKOUT LOCATIONS, SEE SUBMITTAL, * ADD 5/8" FOR CABINETS WITH ALUMINUM FRAMES, * KNOCKOUTS NOT AVAILABLE ON STAINLESS TUBS OR FIRE-RATED FX2 CABINETS,
‡ ‡ TRIMLESS MODELS FEATURE NEW DESIGN AND MAY BE INSTALLED BEFORE DRYWALL - SEE SUBMITTAL AND INSTALLATION INFORMATION

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

FIRE BLANKETS & ACCESSORIES

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

LOCKS & LOCK BOXES

PULLS

ALARMS



N. COMMANDER ALARM
Easy to install cabinet alarms protect against theft or tampering. The Commander Alarm (shown here) is an economical choice.

ACCESSORIES

- **A.** Security lock box 4" x 6" x 2 1/2" #LB
- **B.** Security lock box alarm cover 6" x 6" x 2 1/2" #LBAC
- **C.** Fire Dept lockbox L.A.F.D. with red decal, 16 gauge, 5" x 5" x 1 1/2" approved lockbox for L.A. county #LBLA16
- **D.** Keyed-alike Abus padlock #PL
- **E.** Samson brass keyed-alike padlock #PLB
- **F.** Break glass lock lever assembly LL24-KIT
- **G.** Fire department lock box 4" x 6" x 1 1/2" #LBFD
- **H.** Breaker bar with chain #HCM
- **L.** Futura "FIRE" handle #PUF, PUFR, PUFW
- **M.** ADAC flush pull handle
- **N.** Commander Alarm
- **O.** Standard zinc pull #PUS
- **P.** Chrome pull #PUCH
- **Q.** US10B pull
- **R.** Bronze pull
- **S.** Brass pull
- **T.** Lever Handle #LH
- **U.** Brigadier alarm (BA)
- **V.** Strobe alarm (SA)

FIRE BLANKETS AND CABINETS

Fire Blankets & Cabinet: Royal fire blanket cabinets come in two basic designs. The Royal **9519S21** is a roller type for emergency use. The enclosed blanket is attached to the vertical roller and comes with arm loops to enable a person to wrap themselves in the blanket in one continuous motion. The Royal **9613S21** is a handy "drop" type with folded blanket. Both units are surface mounted. Each comes with a nominal 62" x 80", 2.75 pound, processed wool/ synthetic fire blanket, which meets the Flammable Fabrics Act: Flammability of Clothing Textiles, Title 16, CFR1610.

9613S21

9519S21

Blanket & Extinguisher Combination Cabinet

Door & Trim Construction: CRS with white powder-coat finish, clear anodized aluminum or #4 stainless steel. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.
Trim Style & Depth: Recessed - 3/8" flat trim, Semi-recessed - 1-1/2" square trim, 2-1/2", 4" or 4-1/2" rolled edge, Surface-Mounted - square edge. Rolled edge aluminum trims formed of extrusions. 1-3/4" face trim on frame and 1-1/4" trim on door
Tub: CRS with white powder coat finish standard. Tub of surface mounted models are same material as trim.
Door Style: Full Glass, Vertical Duo, Solid Door.
Glazing: .09 Acrylic, tempered or WireShield™ filmed wire glass.
Shelf: Shelf is located 9" from the top of the cabinet, providing storage of the blanket above the extinguisher.

Blanket: Each cabinet includes a nominal 62" x 80" x 2.75 lb, processed Wool/synthetic fire blanket.
Fire Rated Option Available: Yes
Options at Additional Cost:
SAF-T-LOK™
ADAC Flush Pull
Futura "Fire" Handle in Red, White or Mill
Lettering in Black or Red Pg. 21
Optional Color Trim & Door or Tub -
Color Anodizing for Aluminum Finishes Pg. 24
Wall Signs, Labels & Alarms pg. 20-21

3616F10

TRIM & DOOR & SERIES #				TUB I.D.			FRAME O.D.		Wall Opening: Non-Rated			Wall Opening Fire-Rated			ACCOMMODATES FOLLOWING EXTINGUISHERS
Steel	Aluminum	Stainless	Trim Style	W	H	D	W	H	W	H	D	W	H	D	
3615	3625	3635	Flat Trim	12	36	8	15-3/8	39-3/8	13	37	8	14 5/16	38 5/16	8 15/16	Cosmic & Galaxy 2.5-10, Mercury 2.5-15 (FM11C & 15C), Sentinel 5, Grenadier
3616	3626	3636	1-1/2" Square	12	36	8	15-3/8	39-3/8	13	37	6-3/4	14 5/16	38 5/16	7 11/16	
3617	3627*	3637	2-1/2" Rolled	12	36	8	15-3/8	39-3/8	13	37	5-3/4*	14 5/16	38 5/16	6 11/16*	
3612	3622*	3632	4" Rolled ADA	12	36	8	15-3/8	39-3/8	13	37	4-1/4*	14 5/16	38 5/16	5 3/16*	
3618	3628*	3638	4-1/2" Rolled	12	36	8	15-3/8	39-3/8	13	37	3-3/4*	14 5/16	38 5/16	4 11/16*	
3613	3623	3633	Surface-Mtd.	15-3/16	39-3/16	8	15-3/8	39-3/8	---	---	---	---	---	---	

*Add 5/8 to depth needed for this cabinet in aluminum.

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

2.

3.

5.

4.

8.

1.

7.

6.

9.

10.

11.

12.

19.

20.

21.

13.

14.

15.

16. 17. 18.

26.

25.

27.

28.

22.

23.

24.

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

DECALS AND DIE CUT LETTERING

	DECALS		DIE CUT LETTERING & SIGNS
1	Decal: 4" x 4" - red & white, WARNING #DRWF	16	Diecut: 3/4" x 18" - vertical, red, FIRE EXT #LDCVRFE
2	Decal: 4" x 8 3/4" - horizontal, black & red, FIRE HOSE #DFFH	16R	Diecut: 3/4" x 18" - vertical, red, in reverse FIRE EXT #LDCVRRFE
3	Decal: 2 1/4" x 4" - horizontal, black & red, BREAK GLASS #DRBGR	17	Diecut: 3/4" x 18" - vertical, white, FIRE EXT#LDCVWFE
4	Decal: 1 1/4" x 4" - horizontal, red & white, FIRE EXT. #DWFE	17R	Diecut: 3/4" x 18" - vertical, white, FIRE EXT in reverse #LDCVWRFE
5	Decal: 3" x 4" - horizontal, black & red, FIRE EXT. #DRFER	18	Diecut: 3/4" x 18" - vertical, black, FIRE EXT #LDCVBFE
6	Decal: 12" x 3 1/2" - vertical, red & white, FIRE EXT. #DRFA	18R	Diecut: 3/4" x 18" - vertical, black, in reverse FIRE EXT#LDCVBRFE
7	Decal: 1" x 4 1/4"" - vertical, red & wht, IN CASE OF FIRE #PHCD-RED	19	Diecut: 2 1/4" x 7 3/4" - horizontal, red, FIRE EXT#LDCHRFE
8	Decal: 6" x 6" - octagonal, red, black & white, F.D. VALVE #FDVO	20	Diecut: 2 1/4" x 7 3/4" - horizontal, white, FIRE EXT#LDCHWFE
9	Decal: 4" x 9" - horizontal, black & red, FIRE HOSE #1403	21	Diecut: 2 1/4" x 7 3/4" - horizontal, black, FIRE EXT#LDCHBFE
10	Decal: 7 1/8" x 2 1/4" - horizontal, red & white, FIRE EXT. #LDHRFE	22	Plastic sign: 4" x 12" 3D angle FIRE EXTINGUISHER #22S
11	Decal: 7 1/8" x 2 1/4" - horizontal, FIRE EXT. #LDHWFE	23	Plastic sign: 4" x 18" 3D tent FIRE EXTINGUISHER #23S
12	Decal: 7 1/8" x 2 1/4" - horizontal, black & white, FIRE EXT. #LDHBFE	24	Plastic sign: 5" x 6" 3D tent FIRE EXTINGUISHER #24S
13	Decal: 2" x 19" - vertical, red/clear FIRE EXT. #LDVRFE	25	Plastic sign: 4" x 12" flush vertical FIRE EXT #25S
14	Decal: 2" x 19" - vertical whitet/clear FIRE EXT. #LDVWFE	26	Diecut: 7 7/8" x 1" - horizontal, red, FIRE BLANKET #LDCHRFB
15	Decal: 2" x 19" - vertical black/clear FIRE EXT. #LDVBFE	27R	Diecut: 10 1/4" x 4 3/8" - horiz., red, reverse FD VALVE #DCHFDV-R
28. Etched lettering in glass or engraved lettering in metal. Available with optional color fill as shown above.			

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

PROJECT SHOWCASE

3M Headquarters - Maplewood, MN
Advocate Lutheran General Hospital – Park Ridge, IL
American Embassy – Kathmandu, Nepal
Amsterdam Airport Schipol - Netherlands
Anaheim Convention Center - Anaheim, CA
Baltimore Hilton – Convention Center – Baltimore, MD
Bronx Mental Health Adult Behavioral Health Center - New York, NY
Caesar's Palace Forum Ship - Las Vegas, NV
California Adventure - Ultra Flight - Anaheim, CA
Centurylink Arena - Omaha, NE
Cherry Hospital - Goldsboro, NC
Choctaw Casino Resort - Durant, OK
City Place Complex - Hollywood, FL
Disney Animal Kingdom Resort - Orlando, FL
Disney Art of Animation Resort - Orlando, FL
Disney Aulani Hotel - Oahu, HI
Disney's All-Star Resort - Anaheim, CA
Exxon Mobil Campus - Houston, TX
Federal Courthouse - Boston, MA
First of America Corporation - Kalamazoo, MI
First Union Operations Bldg Soka Univ.- Los Angeles, CA
Georgia State University – Atlanta, GA
Gulf Place - Fort Walton Beach, FL
Hazeltine National Golf Club Clubhouse – Chaska, MN
Hazelton Prison - Bruceton Mills, WV
Highwoods Preserve - Tampa, FL

HAZELTINE NATIONAL CLUBHOUSE
CAVALIER BRONZE FLAT TRIM & ROLLED EDGE CABINETS

Indianapolis International Airport - Indianapolis, IN
John F. Kennedy Airport - Queens, NY
Johns Hopkins Clinical Building – Baltimore, MD
Lambeau Field Renovations - Green Bay, WI
Levi's Stadium - Santa Clara, CA
Lexington On The Green - Lithonia, GA
MaCarran Airport – Las Vegas, NV
Maryland Live Casino - Arundel Mills, MD
Medtronic Headquarters Campus - Mounds View, MN
Miami Dade Homestead Motor Sports Complex - Homestead, FL
Microsoft Data Center - Des Moines, IA
Nationals Park (Washington Nationals) – Washington, DC
Nissan North America Headquarters - Franklin, TN
NYU College of Nursing/Dental - New York, NY
Premier Automotive Group - Irvine, CA
Radisson Blu Mall of America - Bloomington, MN
Red Sox Spring Training Facility - Fort Meyers, FL
Regatta At Vanderbilt Beach - Naples, FL
Sanford Health Facilities - Fargo ND, Sioux Falls SD
Singapore Changi Airport - Singapore
Sportsplex/Natatorium - Laurel, MS
St.Jude Medical Center Addition - Memphis, TN
Target Field – Minneapolis MN
TCF Bank Stadium, University of Minnesota – Minneapolis, MN
The Pentagon – Washington, DC
UCLA Medical Center – Los Angeles, CA
United Health Group Corporate Campus - Eden Prairie, MN
University of California - Irvine, CA
University of Florida Student Union Building - Orlando, FL
Whitehead Research Facility, Emory University - Fort Stewart, GA
Willowbrook Hospital – Cumberland, MD
World Trade Center VSC Project - New York NY

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

CABINET NUMBERING

KEY TO CABINET NUMBER SYSTEM

Recessed Tub Size (I.D.)	
15	10 1/2 x 24 x 4
17	10-1/2 x 24 x 5
18	10 1/2 x 24 x 5 1/2
10 & 12	10 1/2 x 24 x 6
11	9 x 18 x 4 11/16
20	12 x 27 x 7 3/4
25	14 x 30 x 4
30	16 x 32 x 7 3/4
36	12 x 36 x 8
40	20 x 27 x 7 3/4
45	28 x 30 x 4
55	18x18x7-3/4
56	10 1/2 x 24 x 5 3/4
57	16 x 32 x 7 3/4
58	32 x 32 x 7-3/4
59	16 x 40 x 8-3/4
60	24 x 30 x 6
61	24 x 30 x 8
62	24 x 34 3/4 x 6
63	30 x 30 x 8
64	24 x 34 3/4 x 8
65	32 3/4 x 34 3/4 x 8
66	24 x 38 3/4 x 8
72	32 3/4 x 38 3/4 x 8
80	16 x 40 x 9
81	9 x 18 x 5 1/2
84	18 x 18 x 10
85	18 x 18 x 8
86	26 x 26x 10
87	26 x 26 x 8

Door/Trim Material	
1	Steel, white primer finish
2	Aluminum, #180 clear satin anodized finish
3	Stainless Steel, #4 satin finish
4	Bronze, US 10 satin clear coated finish
5	Brass, US 3 polished coated finish
7	US4 Satin Brass (priced on application)
8	US10B Oil-rubbed Bronze (priced on application)
9	Color Anodizing on Aluminum (priced on application)

Note: Bronze and brass are not available in 40, 45, or 58 tub sizes. Special materials and finishes are availble. Contact JL with your special requirements.

Trim Depth	
2	Semi-Recessed 4" rolled edge (ADAC flush pull)
3	Surface Mount (4", 6", 8" or 9"), square edge for steel and aluminum
4	Trimless recessed flange for 5/8" drywall or 3/4" plaster.
5	Full recessed 3/8", square edge
6	Semi-recessed 1 1/4", 1 1/2", square edge
7	Semi-recessed 2 1/2" or 3" rolled edge
8	Semi-recessed 4 1/2", rolled edge
9	Surface mount 4", 6", 8" or 9" rolled edge for stainless steel or steel. (May be a special order item

Note: Bronze and brass are not available in # 8 , 9 or 2 trim depths.

TOP VIEW

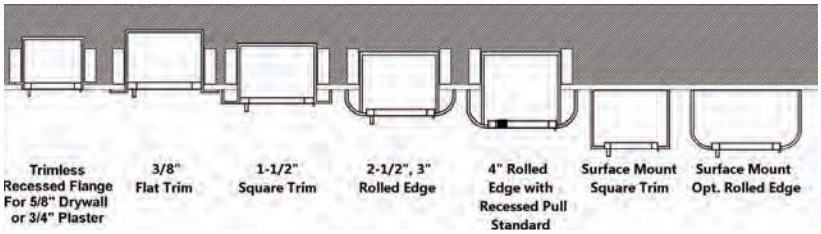

***Note:** For surface mount cabinets, add 3 3/16" to width and height measurements. See product page for wall opening dimensions

Door Style		Door Glazing	
B10	Solid with acrylic insert and SAF-T-LOK™ with pull handle	10	Clear acrylic
D	Duo panel with pull handle	13	Clear wire w/ Safety Film
E	Duo panel with SAF-T-LOK™ with pull handle	15	1/4" bronze acrylic
F	Full glass with pull handle	16	1/4" gray acrylic
G	Full glass with SAF-T-LOK™ with pull handle	17	Clear tempered glass
L22	Solid with lock, no glazing and pull handle	18	Clear safety glass
S21	Solid with pull handle, no glazing (except Embassy)	25	Clear Bubble - Clear Vu, SMB, RBC
L24	Solid with cylinder lock & no pull handle	26	Red Bubble - Clear Vu, SMB, RBC
V	Vertical Duo Panel with pull handle (except Embassy)	27	Bronze Bubble - Clear Vu, SMB, RBC
W	Vertical Duo Panel with SAF-T-LOK™ with pull handle		
Panorama Door Styles Below		**Panorama Glazing Styles Below**	
P	Colored acrylic for Panorama, with pull handle	40	3/16" Black acrylic with white "V" letter
Q	Colored acrylic for Panorama, with SAF-T-LOK™	41	3/16" Red acrylic with white "V" letter
		42	3/16" White acrylic with black "V" letter
		43	3/16" White acrylic with red "V" letter
		45	3/16" Black acrylic with white "H" letter
		46	3/16" Red acrylic with white "H" letter
		47	3/16" White acrylic with black "H" letter
		48	3/16" White acrylic with red "H" letter
		50	3/16" Black acrylic with white "A" letter
		51	3/16" Red acrylic with white "A" letter
		52	3/16" White acrylic with black "A" letter
		53	3/16" White acrylic with red "A" letter
C	Clear acrylic for Panorama, frameless	70	Clear 3/16" acrylic with pull handle
		71	Clear 3/16" acrylic with SAF-T-LOK™

1 0 1 7 W 1 0 F X 2

- Tub Size—Two Digits
- Door/Trim Material—One Digit
- Trim Depth—One Digit
- Door Style—One Digit except L22, S21 & L24 (Select from Catalog Page)
- Door Glazing—Two Digits (Select from Catalog Page)
- Fire-Rated Option—Use "FX2" here or leave blank

Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

OPTIONAL METAL FINISHES

OPTIONAL POWDERCOAT PAINT COLORS

RED (R)	BLACK (B)	BRONZE (BR)	BRASS (BRA)	SAND (S)	SC BEIGE (SB)	LIGHT ANODIZED
SILVER (SI)	GRAY HAMMERTONE (GH)	WHITE (W)	AMS BEIGE (AB)	ORANGE (O)	SAFETY YELLOW (Y)	MEDIUM ANODIZED

PLEASE REFER TO PRODUCT PAGE TO SEE WHICH COLOR OPTIONS ARE AVAILABLE

ANODIZED ALUMINUM

LIGHT ANODIZED

MEDIUM ANODIZED

DARK ANODIZED

Corner Guards

Laboratory Fume Hoods | Tables

Floor Doors

Access Panels

AED

AED Cabinets

Roof Hatches



Smoke Vents



Entrance Mat and Grating Systems

MANUFACTURING/WAREHOUSING LOCATIONS

The Activar Construction Products Group (ACPG) is a dynamic group of 5 companies that combine resources, innovation and experience to serve the commercial construction industry. For over 65 years, JL Industries, Samson Products and Thomas Enterprises have manufactured and distributed some of the leading lines of fire protection products including a full line of fire extinguishers and cabinets, AEDs and cabinets plus valve and hose cabinets. They also offer rated and non-rated access panels, roof accessories, corner guards, detention products and entrance floor mats & gratings. Air Louvers offers a wide variety of metal vision lites & louvers, specialized glass, astragals, and metal edging for both wood and hollow metal doors. Hiawatha Inc. has provided high-quality architectural door hardware and components for over 50 years. Our 8 warehouses and 2 manufacturing locations offer quick shipping of our most popular products to most major metropolitan areas of the US. We have locations in Chicago IL; Lancaster PA; Dallas TX; Fort Myers FL; Fargo ND; Omaha NE; Atlanta GA; Seattle WA; Commerce CA and Bloomington MN. Our two manufacturing locations in California and Minnesota also offer a full range of products, custom manufacturing and quick ship programs for our most popular products.

© ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

CANNONDESIGN

SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

WEBSTER UNIVERSITY ISB
PROJECT NAME

8274 BIG BEND BLVD
ADDRESS

NUMBER

WEBSTER UNIVERSITY
OWNER

CANNON DESIGN
ARCHITECT / ENGINEER

Joe Voypick
SUBMITTED BY

104413-001
CONTRACTOR / CM SUBMITTAL NO.

CANNON DESIGN SUBMITTAL NO.

DRAWING / DETAIL REFERENCE

104413
SPECIFICATION SECTION / PARAGRAPH

Self Perform
MANUFACTURER / SUPPLIER

ITEM / PRODUCT ID

REQUIRED DATE

PRIORITY

CRITICAL

ITEM BEING SUBMITTED (check only one)

- ○ Shop Drawings
- ○ Samples (_____ copies)
- ○ LEED Submittal
- ○ Certification / Qualifications
- ○ Record Documents
- ◉ Product Data
- ○ Coordination Drawing
- ○ Calculations
- ○ Schedules
- ○ O&M Manuals
- ○ Other _____

ITEM BEING SUBMITTED FOR (check only one)

◉ Action ○ Information Only ○ Record

REMARKS OR DEVIATIONS

CONTRACTOR / CM CERTIFICATION
(SUBMITTALS NOT CERTIFIED WILL BE RETURNED WITHOUT REVIEW)

PARIC

PARIC CORPORATION
SUBMITTAL STAMP

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

Subcontractor remains responsible for dimensions, quantities, coordination with other trades and compliance with contract documents.

By:
Devin D. Gates

Joe Voypick
REVIEWED BY

2/2/17
DATE

To be completed by Reviewer

10 4413-001
CANNON DESIGN SUBMITTAL NUMBER

2/2/17
RECEIVED DATE

- ◉ A. No Exceptions Taken
  No further review of submittal is required.
- ○ B. Make Corrections Noted
  Incorporate corrections in work; resubmission is not required.
- ○ C. Revise and Resubmit
  Revise as noted, and resubmit for review.
- ○ D. Rejected
  Submittal is not in compliance with Contract Documents; provide new submittal.
- ○ E. For Record / Information Only
  Submittal was reviewed for Record / Information purposes only.
- ○ F. Not Required for Review
  Submittal is not required by Contract Documents and has not been reviewed.

Review is for conformance with the design concept of this project and for general compliance with contract documents. Contractor is responsible for quantities, dimensions and compliance with contract documents and for information that pertains to fabrication processes, construction techniques and coordination of this work with all trades which will be affected thereby. This review is null and void if submittal deviates from contract documents and does not indicate or note deviations.

A/E COMMENTS

○ See attached sheet(s) for additional comments

Kelvin Patel
Digitally signed by Kelvin Patel
DN: C=US, E=kpatel@cannondesign.com, O=Cannon Design, OU=Architect, CN=Kelvin Patel
Date: 2017.02.23 17:03:18-06'00'
REVIEWED BY

2/23/17
DATE

PARIC
EXPERIENCE. EXCELLENCE.
77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0471

Paric Corporation

PROJECT: 15051-Webster University Interdisciplinary Science Building

DATE: 02/02/2017

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

Fax;
314-241-2203

RE: Fire Extinguisher Cabinets product data

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings	☑ Approval	☐ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	**SENT VIA:**	☐ Returned
☐ Specifications	☐ Attached	☐ Returned for Corrections
☑ Other: Product Data	☐ Separate Cover Via:	☑ Due Date: 01/12/2017

Item	*Package*	*Code*	*Rev.*	*Copies*	*Date*	*Description*	*Status*
Submittal		104413-001	1		02/02/2017	Fire Extinguisher Cabinets product data	Submitted

NOTES:

CC:

Signed: _____
Devin Gates