FireLock® Butterfly Valve
Style 705 with Weatherproof Actuator

Victaulic
10.81

Approvals/Listings:

c UL us LISTED · FM · VdS # G410001 · LPCB 104j/04 · CTP

See Victaulic Publication 10.01 for more details.

Product Description:

The Series 705 Butterfly Valve features a weatherproof actuator housing Approved for indoor or outdoor use, a ductile iron body and disc with EPDM seats. Designed for fire protection services only. Victaulic FireLock Series 705 Butterfly Valve is cULus Listed, LPCB Listed, FM and VdS Approved for 300 psi/2068 kPa service. Contact Victaulic for details of agency approvals.

Material Specifications:

Body: Ductile iron conforming to ASTM A-536, grade 65-45-12

End Face, 2 – 6"/50 – 150 mm: Ductile iron conforming to ASTM A-536, grade 65-45-12

Seal Retainer, 8 – 12"/200 – 300 mm: Ductile iron conforming to ASTM A-536, grade 65-45-12

Coating: Black alkyd enamel

Disc: Ductile iron conforming to ASTM A-536, grade 65-45-12, with electroless nickel coating conforming to ASTM B-733

Seat:

☐ Grade “E” EPDM

Stems: 416 stainless steel conforming to ASTM A-582

Stem Seal Cartridge: C36000 brass

Bearings: Stainless Steel with TFE lining

Stem Seals: EPDM

Stem Retaining Ring: Carbon steel

Actuator:

☐ 2 – 8"/50 – 200mm: Brass or bronze traveling nut on a steel lead screw, in a ductile iron housing

☐ 10 – 12"/250 – 300mm: Steel worm and cast iron quadrant gear, in a cast iron housing

Job/Owner

System No.	
Location	

Contractor

Submitted By	
Date	

Engineer

Spec Section	
Paragraph	
Approved	
Date	

10.81 5662 Rev F Updated 11/2014 © 2014 Victaulic Company. All rights reserved.

Approvals and Listings:

Size	Approval/Listing Service Pressures			
	Series 705 Butterfly Valve			
	cULus	FM	Vds	LPCB
2"/50 mm	up to 300psi/2068kPa	n/a	up to 300psi/2068kPa	up to 300psi/2068kPa
2 ½"/65 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	n/a	up to 300psi/2068kPa
76.1 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa
3"/80 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa
4"/100 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa
5"/125 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	n/a	up to 300psi/2068kPa
139.7 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa
6"/150 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa
165.1 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	n/a	up to 300psi/2068kPa
8"/200 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa	up to 300psi/2068kPa
10"/250 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	n/a	up to 300psi/2068kPa
12"/300 mm	up to 300psi/2068kPa	up to 300psi/2068kPa	n/a	up to 300psi/2068kPa

 © 2014 Victaulic Company. All rights reserved.

Dimensions:

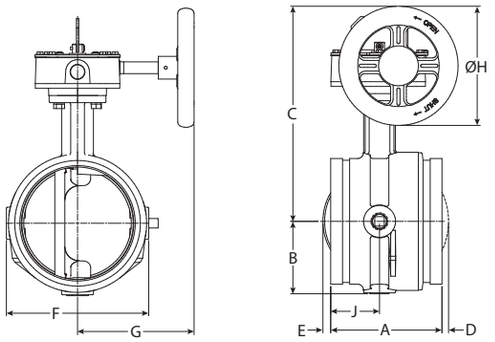

NOTE: OPTIONAL ½"/15MM TAP AVAILABLE.
CONTACT VICTAULIC FOR DETAILS.

Nominal Size	Actual Outside Diameter	Dimensions								
		E to E A	B	C	D	E	F	G	DIA H	J
inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm	inches mm
2 60.3	2.375 60.3	4.25 108.0	2.28 57.9	6.41 162.8	–	–	4.00 101.6	4.22 107.2	4.50 114.3	2.12 53.8
2½ 73	2.875 73.0	3.77 95.8	2.28 57.9	7.54 191.5	–	–	4.00 101.6	4.22 107.2	4.50 114.3	1.77 45.0
76.1 mm	3.000 76.1	3.77 95.8	2.28 57.9	7.54 191.5	–	–	4.00 101.6	4.22 107.2	4.50 114.3	1.77 45.0
3 88.9	3.500 88.9	3.77 95.8	2.53 64.3	7.79 197.9	–	–	4.50 114.3	4.22 107.2	4.50 114.3	1.77 45.0
108 mm	4.250 108.0	4.63 117.6	2.88 73.2	8.81 223.8	–	–	5.50 139.7	4.22 107.2	4.50 114.3	2.20 55.9
4 114.3	4.500 114.3	4.63 117.6	2.88 73.2	8.81 223.8	–	–	5.50 139.7	4.22 107.2	4.50 114.3	2.20 55.9
133 mm	5.250 133.0	5.88 149.4	3.35 85.1	10.88 276.4	–	–	6.56 166.6	6.19 157.2	6.30 160.0	2.58 65.5
139.7 mm	5.500 139.7	5.88 149.4	3.35 85.1	10.88 276.4	–	–	6.56 166.6	6.19 157.2	6.30 160.0	2.58 65.6
5 141.3	5.563 141.3	5.88 149.4	3.35 85.1	10.88 276.4	–	–	6.56 166.6	6.19 157.2	6.30 160.0	2.58 65.5
159 mm	6.250 159.0	5.88 149.4	3.84 97.5	11.38 289.1	–	0.41 10.4	7.52 191.0	6.19 157.2	6.30 160.0	2.58 65.5
165.1mm	6.500 165.1	5.88 149.4	3.84 97.5	11.38 289.1	–	0.41 10.4	7.52 191.0	6.19 157.2	6.30 160.0	2.58 65.5
6 168.3	6.625 168.3	5.88 149.4	3.84 97.5	11.38 289.1	–	0.41 10.4	7.52 191.0	6.19 157.2	6.30 160.0	1.90 48.3
8 219.1	8.625 219.1	5.33 135.4	5.07 128.8	13.53 343.6	0.80 20.3	1.47 37.3	10.00 254.0	6.19 157.2	8.10 205.7	2.33 59.2
10 273	10.750 273.0	6.40 162.6	6.37 161.8	15.64 397.3	1.41 35.8	1.81 46.0	12.25 311.2	8.10 205.7	9.00 228.6	–
12 323.9	12.750 323.9	6.50 165.1	7.36 186.9	16.64 422.7	2.30 58.4	2.80 71.1	14.25 362.0	8.10 205.7	9.00 228.6	–

 © 2014 Victaulic Company. All rights reserved.

Performance:

The chart expresses the frictional resistance of Victaulic Series 705 Butterfly Valve in equivalent feet/ meters of straight pipe.

Nominal Size mm inches	Outside Diameter mm inches	Equivalent Feet/m of pipe
2 50	2.375 60.3	6 1.8
2½ 65	2.875 73.0	6 1.8
76.1 mm	3.000 76.1	6 1.8
3 80	3.500 88.9	7 2.1
4 100	4.500 114.3	8 2.4
108 mm	108 mm	8 2.4
5 125	5.563 141.3	12 3.7
133 mm	133 mm	12 3.7
139.7 mm	5.500 139.7	12 3.7
6 150	6.625 168.3	14 4.2
159 mm	159 mm	14 4.3
165.1 mm	6.500 165.1	14 4.2
8 200	8.625 219.1	16 4.9
10 250	10.750 273.0	18 5.5
12 300	12.750 323.9	19 5.8

 © 2014 Victaulic Company. All rights reserved.

Performance:

C_V values for flow of water at +60°F/+16°C through a fully open valve are shown in the table below. For additional details, contact Victaulic.

Formulas for C_v values

$\Delta P = Q^2/C_v^2$

$Q = C_v \times \sqrt{\Delta P}$

Where:

Flow Coefficient	C_v
Q (Flow)	GPM
ΔP (Pressure Drop)	psi

Formulas for K_v values

$\Delta P = Q^2/K_v^2$

$Q = K_v \times \sqrt{\Delta P}$

Where:

Flow Factor	K_v
Q (Flow)	m^3/hr
ΔP (Pressure)	bar

Valve Size		Full Open
Nominal Size inches mm	**Actual Outside Diameter** inches mm	**Flow Coefficient** C_v
2 50	2.375 60.3	170
2½ 65	2.875 73.0	260
76.1 mm	3.000 76.1	260
3 80	3.500 88.9	440
4 100	4.500 114.3	820
108 mm	108 mm	820
5 125	5.563 141.3	1200
133 mm	133 mm	1200
139.7 mm	5.500 139.7	1200
6 150	6.625 168.3	1800
159 mm	159 mm	1800
165.1 mm	6.500 165.1	1800
8 200	8.625 219.1	3400
10 250	10.750 273.0	5800
12 300	12.750 323.9	9000

Valve Size		Full Open
Nominal Size inches mm	**Actual Outside Diameter** inches mm	**Flow Coefficient** K_v
2 50	2.375 60.3	147
2½ 65	2.875 73.0	225
76.1 mm	3.000 76.1	225
3 80	3.500 88.9	380
4 100	4.500 114.3	710
108 mm	108 mm	710
5 125	5.563 141.3	1040
133 mm	133 mm	1040
139.7 mm	5.500 139.7	1040
6 150	6.625 168.3	1560
159 mm	159 mm	1560
165.1 mm	6.500 165.1	1560
8 200	8.625 219.1	2940
10 250	10.750 273.0	5020
12 300	12.750 323.9	7790

 © 2014 Victaulic Company. All rights reserved.

Switch and Wiring:

1. The supervisory switch contains two single pole, double throw, pre-wired switches.
2. Switches are rated:

   10 amps @ 125 or 250 VAC/60 Hz

   0.50 amps @ 125 VDC

   0.25 amps @ 250 VDC
3. Switches supervise the valve in the “OPEN” position.
5. One switch has two #18 insulated wires per terminal, which permit complete supervision of leads (refer to diagrams and notes below). The second switch has one #18 insulated wire per terminal. This double circuit provides flexibility to operate two electrical devices at separate locations, such as an indicating light and an audible alarm, in the area that the valve is installed.
6. A #14 insulated ground lead (green) is provided.

   Switch #1 = S1

   For connection to the supervisory circuit of a UL Listed alarm control panel

   Switch #2 = S2

   Auxiliary switch that may be connected to auxiliary devices, per the authority having jurisdiction

S1
- Normally Closed: (2) Blue
- Common: (2) Yellow

S2
- Normally Closed: Blue with Orange Stripe
- Normally Open: Brown with Orange Stripe
- Common: Yellow with Orange Stripe

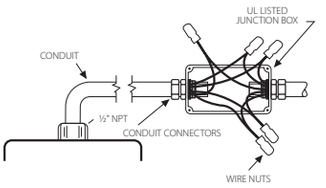

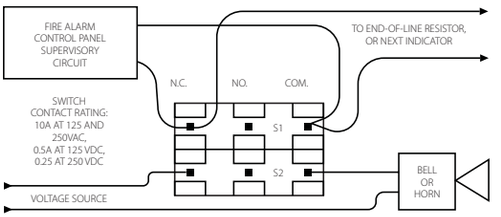

Switch 1: 2 leads per terminal
Switch 2: 1 lead per terminal

NOTE: The above diagram shows a connection between the common terminal (yellow – S1 and yellow-with-orange stripe – S2) and the normally closed terminal (blue – S1 and blue-with-orange stripe – S2). In this example, the indicator light and alarm will stay on until the valve is fully open. When the valve is fully open, the indicator light and alarm will go out. Cap off any unused wires (e.g. brown with orange stripe).

Only S1 (two leads per terminal) may be connected to the fire alarm control panel.

The connection of the alarm switch wiring shall be in accordance with NFPA 72 and the auxiliary switch per NFPA 70 (NEC).

Installation
Reference should always be made to the I-100 Victaulic Field Installation Handbook for the product you are installing. Handbooks are included with each shipment of Victaulic products for complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

Warranty
Refer to the Warranty section of the current Price List or contact Victaulic for details.

Note
This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

Trademarks
Victaulic® is a registered trademark of Victaulic Company.

 © 2014 Victaulic Company. All rights reserved.

WM TAO & ASSOCIATES
CONSULTING ENGINEERS

Shop Drawing Submittal Review

Transmitted To: Cannon Design

Date: December 15, 2016

Attention: **stl-cac@cannondesign.com**

Contact Person / WTA Field Inspector: Patrick Garner

Project Name: Webster University-**ISB**

Reviewed by: Mike Whitworth (WES)

Project No. WT 14127.01
WES 607

[ ] UPS [ ] Courier [X] **Email**

Copies	No.	Description
1 PDF	210523F01	(Submittal No.'s:)
		(Cannon #210523-002) - (Paric #15051-0353) – (WES #607)
		➢ **Valves for Fire Protection Piping Product Data**

*Remarks: See Submittal Review from Webb Enginnering.

c: **Kelvin Patel**
Kpatel@cannondesign.com

[X] ***Reviewed**

[X] ***No Exceptions Taken**

[ ]

[ ] *Make Corrections As Noted, No Resubmittal Required

Corrections or comments made on shop drawings during this review do not relieve contractor from compliance with requirements of drawings and specifications. This check is only for review of general conformance with the design concept of project and general compliance with information given in contract documents. Contractor is responsible for: confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordinating his work with that of all other trades; and performing his work in a safe and satisfactory manner.

WEBB ENGINEERING SERVICES INC.

1400 S. 3rd Street, Suite 201
St. Louis, Missouri 63104
Phone: (314) 588-0600
Fax: (314) 588-0604

Letter of Transmittal

To: wtashop@wmtao.com

From: Mike Whitworth

Date: December 11, 2016

Re: Webster University ISB

WES No: 607

☐ For your Files ☐ For Review ☐ Please Comment ☐ Please Reply

Item No.	Description	No. of Copies	Date
1	Shop Drawing Review – (210523-002) 210523 General Duty Valves for Water-Based Fire-Suppression Piping	1	12/11/16

•Signature: Mike Whitworth

WEBB ENGINEERING SERVICES INC.
1400 S. 3rd Street, Suite 201 • St. Louis, Missouri 63104 • 314.588.0600 • *fax* 314.588.0604
www.webb-engineering.com

The review of this submittal is limited to the general conformance with the designated design concept and intent of this project and with the general compliance of the information provided in the contract documents. All comments, remarks and notations made on the submittal(s) as a result of this review do not relieve the contractor from full compliance with requirements of the contract documents. Approval for a specific item shall not include approval of an assembly of which the item is not a component. The contractor is solely responsible for rough-in and installation confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordination of this work with that of other trades on this project; and in a safe and satisfactory manner. All work shall be installed in full compliance with the manufacturer's recommendation, Federal, State and Local rules and regulation and the Authority Having Jurisdiction (AHJ) and applicable adopted codes and standards.

PROJECT NAME:	Webster University ISB
LOCATION:	St. Louis Missouri
CLIENT PROJ. NO.:	N/A
WES PROJ. NO.:	607
SPECIFICATION SECTION:	210523 General Duty Valves for Water Based Fire-Suppression Piping
SUBMITTAL ITEM:	See Below -

CONTRACTOR:	J.F. Ahern Co.
CTR. SUBMITTAL #:	21 0523-002
SUBMITTAL DATE:	November 29, 2016
DATE RECEIVED:	December 07, 2016
RECEIVED VIA:	E-Mail
RECEIVED FROM:	WTA
DATE RETURNED:	DECEMBER 11, 2016
RETURNED VIA:	E-MAIL
RETRURNED TO:	WTASHOP@WMTAO.COM

STATUS KEY:

NO EXCEPTION TAKEN
MAKE CORRECTIONS NOTED, NO RESUBMITTAL:
AMEND AND RESUBMIT
REJECTED, SEE REMARKS:
REVIEWED ONLY

NEC	MCN	AAR	REJ	REV	ITEM	REMARKS
X					Iron Body Gate Valves NIBCO Model - F-607-RW	
X					Butterfly Valves Victaulic Model - Fire Lock Style 705	
X					Swing Check Valve Viking Model - D-1 & G-1	
X					Bronze Gate Valves NIBCO Model - T-104-0	
X					Bronze Angle Valves NIBCO Model - T-301-W	
X					Bronze Globe Valves NIBCO Model – KT-65-UL	
X					Bronze Globe Valves NIBCO Model – KT-211-W-UL	

WEBB ENGINEERING SERVICES INC.
1400 S. 3rd Street, Suite 201 • St. Louis, Missouri 63104 • 314.588.0600 • *fax* 314.588.0604
www.webb-engineering.com

X					Bronze Side Outlet Globe Valves NIBCO Model – KT-291-W3	
X					Bronze Check Valves NIBCO Model – KT-403-W	
X					Bronze Ball Valves NIBCO Model – KT-585-70-UL and KT-580-70-UL	
X					Fire Lock Ball Valve Victaulic Model - Fire Lock Series 728	
X					Butterball Butterfly Valves Milwaukee Valve Model - Various	
X					Calibrated Pressure Relief Valves Watts Model – Series 530C	
X					Test and Drain Valve AGF Manufacturing Model – 1011A	
X					Double Check Valve Assembly Zurn Model - 350A	
X					Forged Brass Ball Valve KITZ Model - 58	
X					Pressure Relief Valve / Pump Casing Relief Valve CLA-VAL Model – 55L-60	
X					Air Release Valve Val-Matic Valve and Manufacturing Corp. Model – 22.9	

REVIEWED BY: Michael R. Whitworth DATE: December 11, 2016

THESE COMMENTS ARE TO BE ATTACHED TO ALL COPIES OF THE SHOP DRAWING REFERENCED ABOVE.

CANNONDESIGN

SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

WEBSTER UNIVERSITY ISB
PROJECT NAME

8274 BIG BEND BLVD
ADDRESS

NUMBER

WEBSTER UNIVERSITY
OWNER

CANNON DESIGN
ARCHITECT / ENGINEER

Joe Voypick
SUBMITTED BY

210523-002
CONTRACTOR / CM SUBMITTAL NO.

CANNON DESIGN SUBMITTAL NO.

DRAWING / DETAIL REFERENCE

210523
SPECIFICATION SECTION / PARAGRAPH

Ahern Fire Protection
MANUFACTURER / SUPPLIER

ITEM / PRODUCT ID

REQUIRED DATE

PRIORITY

◯ CRITICAL

ITEM BEING SUBMITTED (check only one)

- ◯ Shop Drawings
- ◯ Samples (_____ copies)
- ◯ LEED Submittal
- ◯ Certification / Qualifications
- ◉ Record Documents
- ◯ Product Data
- ◯ Coordination Drawing
- ◯ Calculations
- ◯ Schedules
- ◯ O&M Manuals
- ◯ Other _____

ITEM BEING SUBMITTED FOR (check only one)

◉ Action ◯ Information Only ◯ Record

REMARKS OR DEVIATIONS

CONTRACTOR / CM CERTIFICATION
(SUBMITTALS NOT CERTIFIED WILL BE RETURNED WITHOUT REVIEW)

PARIC

PARIC CORPORATION
SUBMITTAL STAMP

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

Subcontractor remains responsible for dimensions, quantities, coordination with other trades and compliance with contract documents.

By:
Devin D. Gates

Joe Voypick
REVIEWED BY

11/30/16
DATE

To be completed by Reviewer

21 0523-002
CANNON DESIGN SUBMITTAL NUMBER

11/30/16
RECEIVED DATE

- ◯ A. No Exceptions Taken
  No further review of submittal is required.
- ◯ B. Make Corrections Noted
  Incorporate corrections in work; resubmission is not required.
- ◯ C. Revise and Resubmit
  Revise as noted, and resubmit for review.
- ◯ D. Rejected
  Submittal is not in compliance with Contract Documents; provide new submittal.
- ◯ E. For Record / Information Only
  Submittal was reviewed for Record / Information purposes only.
- ◯ F. Not Required for Review
  Submittal is not required by Contract Documents and has not been reviewed.

Review is for conformance with the design concept of this project and for general compliance with contract documents. Contractor is responsible for quantities, dimensions and compliance with contract documents and for information that pertains to fabrication processes, construction techniques and coordination of this work with all trades which will be affected thereby. This review is null and void if submittal deviates from contract documents and does not indicate or note deviations.

A/E COMMENTS ◯ See attached sheet(s) for additional comments

REVIEWED BY

DATE

77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0353

Paric Corporation

PROJECT: 15051-Webster University Interdisciplinary Science Building

DATE: 11/29/2016

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

Fax;
314-241-2203

RE: Valves for Fire Protection Piping Product Data

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings	☑ Approval	☐ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	**SENT VIA:**	☐ Returned
☐ Specifications	☐ Attached	☐ Returned for Corrections
☑ Other: Product Data	☐ Separate Cover Via:	☐ Due Date:

Item	*Package*	*Code*	*Rev.*	*Copies*	*Date*	*Description*	*Status*
Submittal		210523-002	1		11/29/2016	Valves for Fire Protection Piping Product Data	Submitted

NOTES:

CC:

Signed: _____

Devin Gates