

Technical Services: Tel: (800) 381-9312 / Fax: (800) 791-5500

Sprinkler Cabinets

3, 6, & 12 Sprinklers, 1/2 or 3/4 Inch NPT

6 ESFR Sprinklers, 3/4 or 1 Inch NPT

General
Description

Tyco® Sprinkler Cabinets are constructed of metal enclosures with hinged covers designed to provide on-site storage of an emergency supply of sprinklers and a sprinkler wrench.

NFPA 13 requires a representative number of each type of sprinkler used in a sprinkler system to be stored in a cabinet on-site to allow for immediate removal and replacement of sprinklers that may have operated or become damaged.

Sprinkler Cabinets are manufactured of heavy gauge steel with knock-outs to accommodate NPT threaded sprinklers and are painted an attractive red enamel.

WARNINGS


The Sprinkler Cabinets described herein must be installed and maintained in compliance with this document, as well as with the applicable standards of the National Fire Protection Association, in addition to the standards of any other authorities having jurisdiction. **Failure to do so may impair the performance of these devices.**

The owner is responsible for maintaining their fire protection system and devices in proper operating condition. The installing contractor or sprinkler manufacturer should be contacted with any questions.



Technical
Data

Material	
Carbon Steel	
Weights	
3 Sprinkler Cabinet	1.5 Lbs. (0,68 kg)
6 Sprinkler Cabinet	2.3 Lbs. (1,04 kg)
12 Sprinkler Cabinet	4.0 Lbs. (1,81 kg)
6 ESFR Sprinkler Cabinet	3.3 Lbs. (1,36 kg)

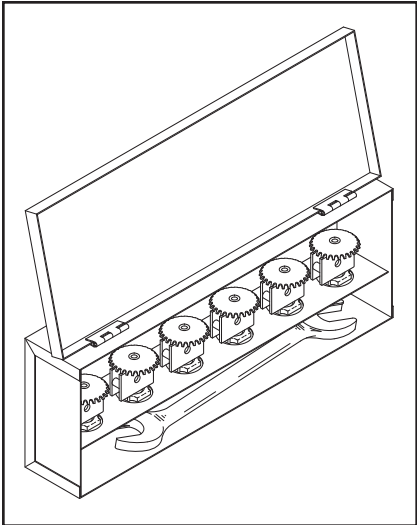

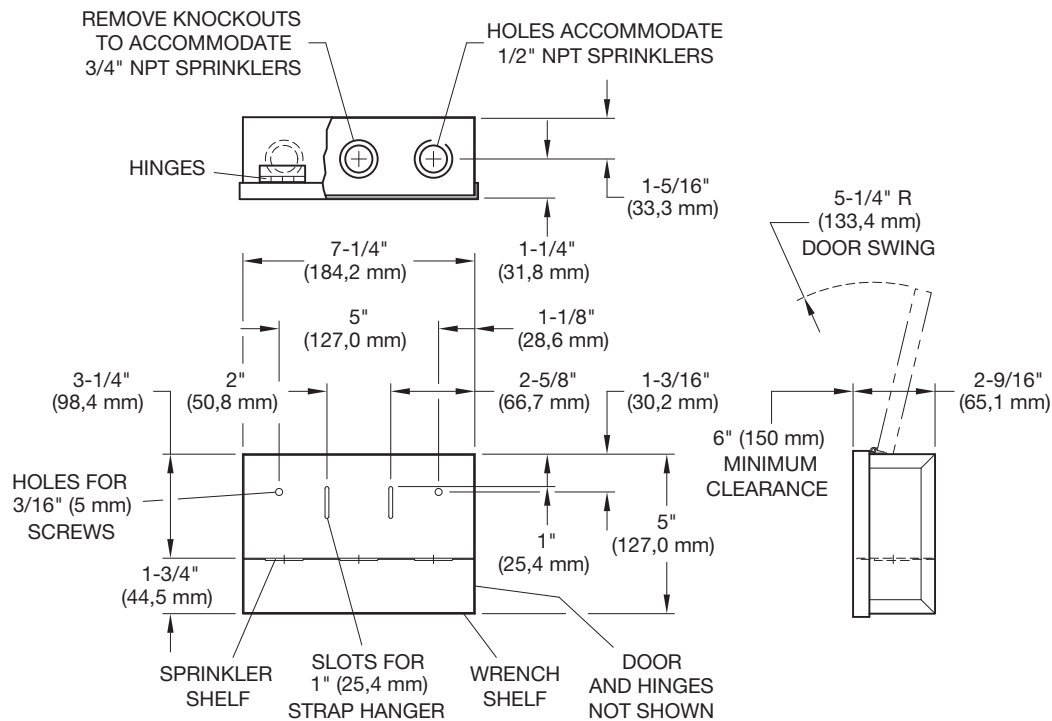


FIGURE 1
3 SPRINKLER CABINET

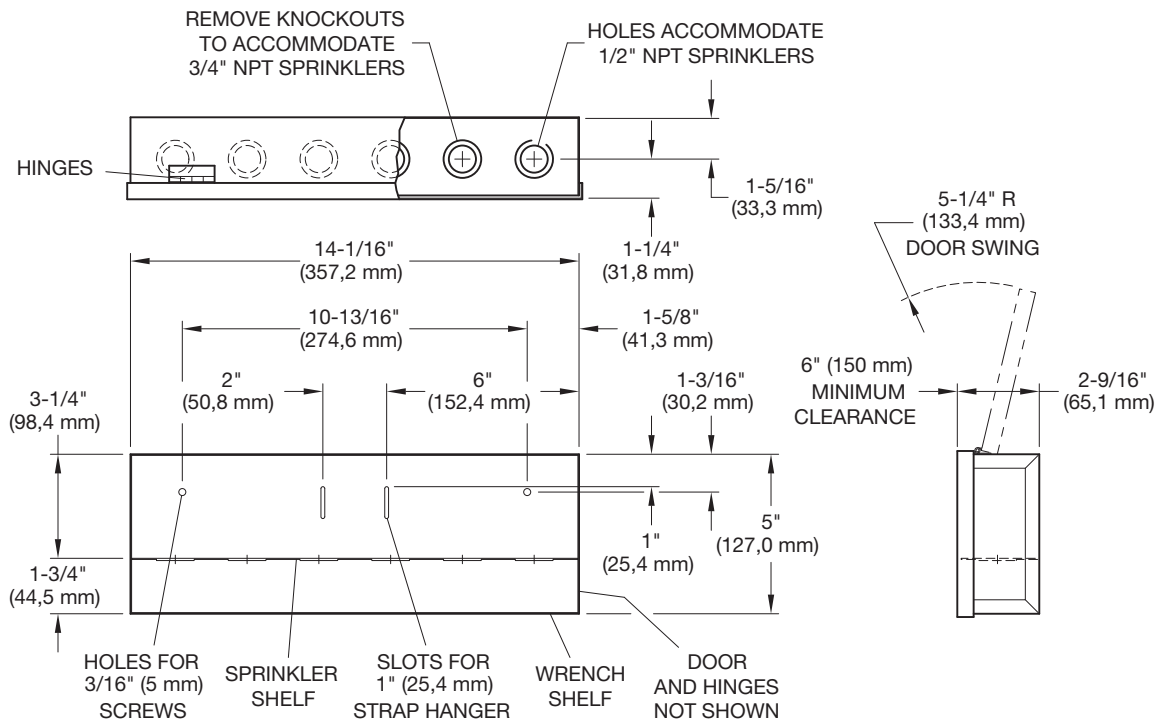


FIGURE 2
6 SPRINKLER CABINET

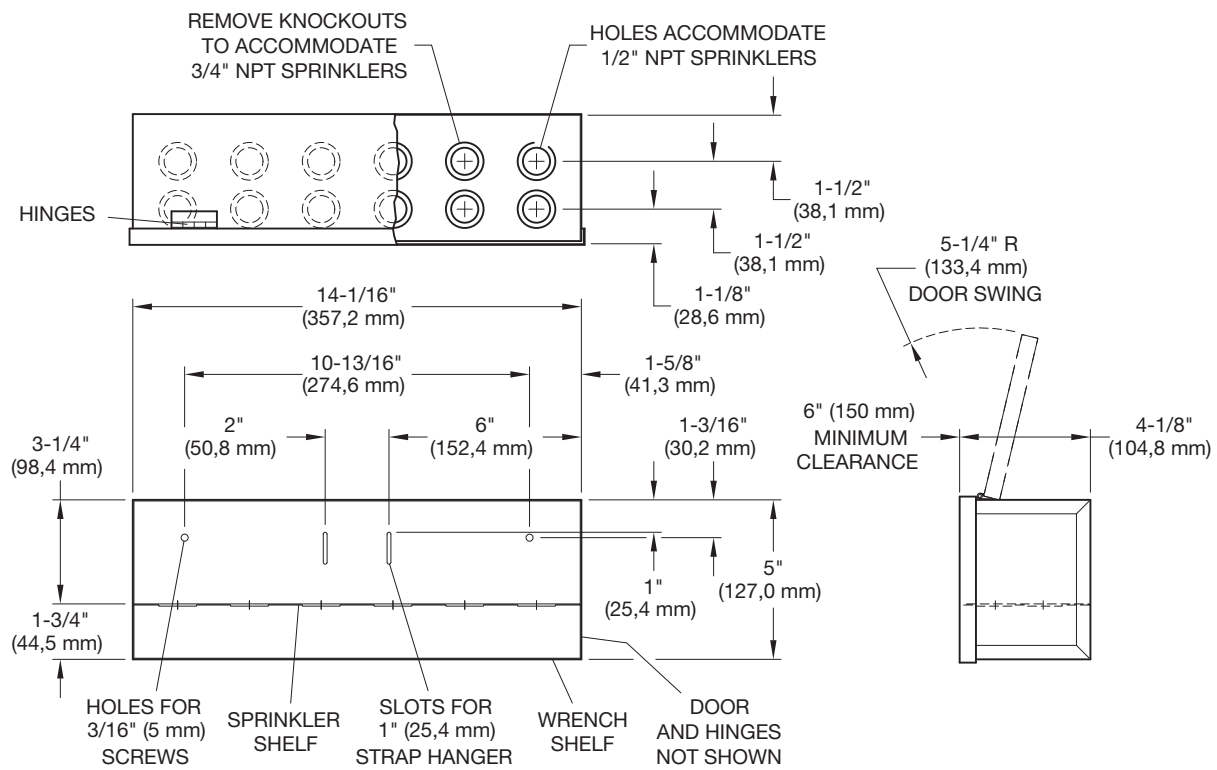


FIGURE 3
12 SPRINKLER CABINET

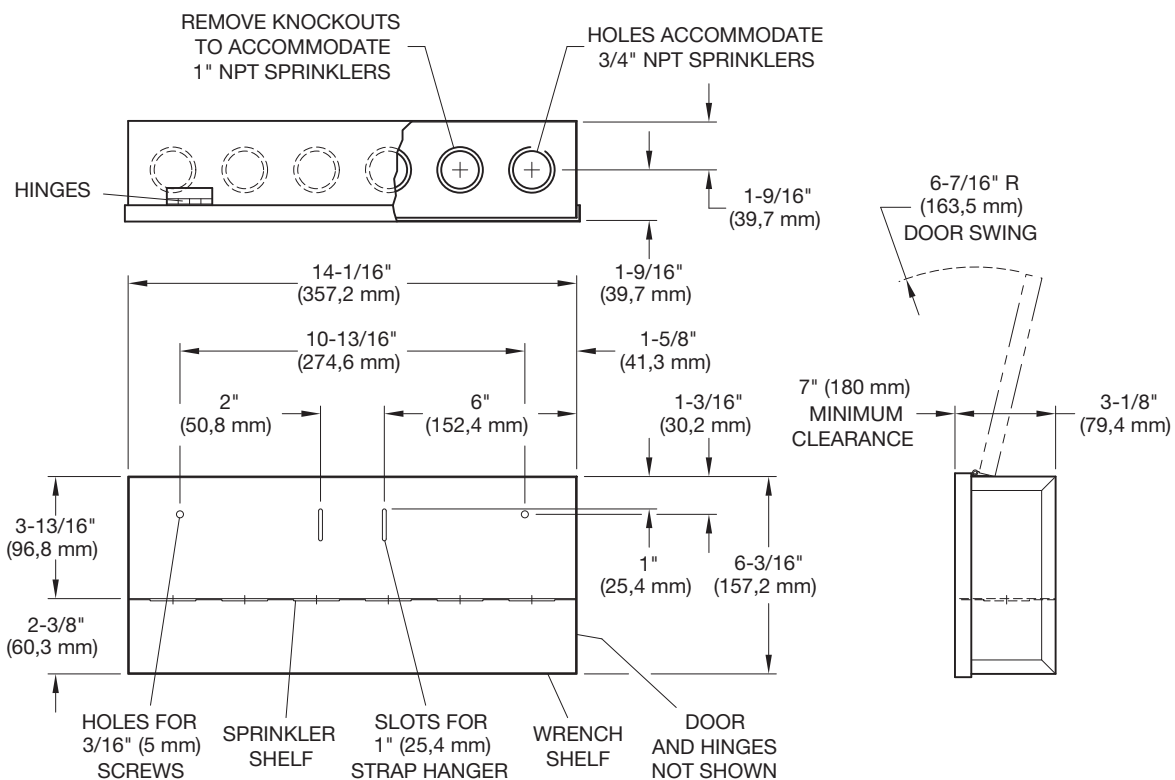


FIGURE 4
6 ESFR SPRINKLER CABINET

Installation

Sprinkler Cabinets are designed with two 3/16 Inch (4,7 mm) diameter holes for wall mounting or direct attachment to the system riser with a strap-type hanger. The Sprinkler Cabinet should be installed at or near the system control valve and must be stocked with an adequate supply of spare sprinklers and a sprinkler wrench.

The stock of spare sprinklers should include sprinklers of each type and temperature rating as are installed in the sprinkler system, in the following quantities:

Sprinklers In System	Spare Sprinklers Required
Under 300	6
300-1000	12
Over 1000	24

The 3, 6, and 12 Sprinkler Cabinets are designed to accept both 1/2 & 3/4 Inch NPT threaded sprinklers, whereas the 6 ESFR Sprinkler Cabinets are designed to accept both 3/4 & 1 Inch NPT threaded sprinklers. As necessary, insert a screwdriver blade from the front top of the shelf and under the near bottom part of the knockout annular ring. Press the screwdriver handle down to remove the knockout ring.

Care and Maintenance

The Sprinkler Cabinet, wrench, and stock of spare sprinklers should be inspected at least quarterly. The following items should be checked:

- The Sprinkler Cabinet should be readily accessible, and not exposed to a corrosive atmosphere or temperatures in excess of 100°F (38°C).
- The stock of spare sprinklers should include an adequate number of each type and temperature rating.
- The stock of sprinklers must be in good condition.
- A sprinkler wrench of the appropriate type must be included in the Sprinkler Cabinet.

Limited Warranty

Products manufactured by Tyco Fire & Building Products (TFBP) are warranted solely to the original Buyer for ten (10) years against defects in material and workmanship when paid for and properly installed and maintained under normal use and service. This warranty will expire ten (10) years from date of shipment by TFBP. No warranty is given for products or components manufactured by companies not affiliated by ownership with TFBP or for products and components which have been subject to misuse, improper installation, corrosion, or which have not been installed, maintained, modified or repaired in accordance with applicable Standards of the National Fire Protection Association, and/or the standards of any other Authorities Having Jurisdiction. Materials found by TFBP to be defective shall be either repaired or replaced, at TFBP's sole option. TFBP neither assumes, nor authorizes any person to assume for it, any other obligation in connection with the sale of products or parts of products. TFBP shall not be responsible for sprinkler system design errors or inaccurate or incomplete information supplied by Buyer or Buyer's representatives.

In no event shall TFBP be liable, in contract, tort, strict liability or under any other legal theory, for incidental, indirect, special or consequential damages, including but not limited to labor charges, regardless of whether TFBP was informed about the possibility of such damages, and in no event shall TFBP's liability exceed an amount equal to the sales price.

The foregoing warranty is made in lieu of any and all other warranties, express or implied, including warranties of merchantability and fitness for a particular purpose.

This limited warranty sets forth the exclusive remedy for claims based on failure of or defect in products, materials or components, whether the claim is made in contract, tort, strict liability or any other legal theory.

This warranty will apply to the full extent permitted by law. The invalidity, in whole or part, of any portion of this warranty will not affect the remainder.

Ordering Procedure

When placing an order, indicate the full product name. Contact your local distributor for availability.

Sprinkler Cabinet:
Specify: (Description), P/N (specify).

3 Sprinkler Cabinet	P/N 1177
6 Sprinkler Cabinet	P/N 1119
12 Sprinkler Cabinet	P/N 1124
6 ESFR Sprinkler Cabinet	P/N 1111

Shop Drawing Submittal Review

Transmitted To: Cannon Design

Date: December 20, 2016

Attention: stl-cac@cannondesign.com

Contact Person / WTA Field Inspector:
Patrick Garner

Project Name: Webster University-**ISB**

Reviewed by: Mike Whitworth (WES)

Project No. WT 14127.01
WES 607

☐ UPS ☐ Courier ☒ **Email**

Copies	No.	Description
1 PDF	211313F02	(Submittal No.'s:)
		(Cannon #211313-015) - (Paric #15051-0349) – (WES #607)
		➤ Wet Pipe Sprinkler System Product Data

***Remarks: See Submittal Review from Webb Engineering.**

c: Kelvin Patel
Kpatel@cannondesign.com

☒ ***Reviewed**

☒ ***No Exceptions Taken -**

☒ ***Amend and Resubmit**

☒ ***Make Corrections As Noted,
No Resubmittal Required**

Corrections or comments made on shop drawings during this review do not relieve contractor from compliance with requirements of drawings and specifications. This check is only for review of general conformance with the design concept of project and general compliance with information given in contract documents. Contractor is responsible for: confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordinating his work with that of all other trades; and performing his work in a safe and satisfactory manner.



1400 S. 3rd Street, Suite 201
St. Louis, Missouri 63104
Phone: (314) 588-0600
Fax: (314) 588-0604

Letter of Transmittal

To: wtashop@wmtao.com

From: Mike Whitworth

Date: December 20, 2016

Re: Webster University ISB

WES No: 607

☐ For your Files

☐ For Review

☐ Please Comment

☐ Please Reply

Item No.	Description	No. of Copies	Date
1	Shop Drawing Review – (213113-015) 211313 Wet Pipe Sprinkler System	1	12/20/16

•Signature: Mike Whitworth

The review of this submittal is limited to the general conformance with the designated design concept and intent of this project and with the general compliance of the information provided in the contract documents. All comments, remarks and notations made on the submittal(s) as a result of this review do not relieve the contractor from full compliance with requirements of the contract documents. Approval for a specific item shall not include approval of an assembly of which the item is not a component. The contractor is solely responsible for rough-in and installation confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordination of this work with that of other trades on this project; and in a safe and satisfactory manner. All work shall be installed in full compliance with the manufacturer's recommendation, Federal, State and Local rules and regulation and the Authority Having Jurisdiction (AHJ) and applicable adopted codes and standards.

PROJECT NAME: Webster University I

LOCATION: St. Louis Missouri

CLIENT PROJ. NO.: N/A

WES PROJ. NO.: 607

SPECIFICATION 211313
SECTION: Wet Pipe Sprinkler System

SUBMITTAL ITEM: See Below -

CONTRACTOR: J.F. Ahern Co.
CTR. SUBMITTAL #: 21 1313-015
SUBMITTAL DATE: November 29, 2016
DATE RECEIVED: December 07, 2016
RECEIVED VIA: E-Mail
RECEIVED FROM: WTA
DATE RETURNED: DECEMBER 20, 2016
RETURNED VIA: E-MAIL
RETRURNED TO: WTASHOP@WMTAO.COM

STATUS KEY:

NO EXCEPTION TAKEN

MAKE CORRECTIONS NOTED, NO RESUBMITTAL:

AMEND AND RESUBMIT

REJECTED, SEE REMARKS:

REVIEWED ONLY

NEC	MCN	AAR	REJ	REV	ITEM	REMARKS
Pages numbers have been added to cut sheets for referencing						
X					Page 001 Schedule 10 Pipe Various Manufacturers	
X					Page 002 Schedule 40 Pipe Various Manufacturers	
X					Pages 003 – 004 Test and Drain Valve AGF Manufacture ring Model – 1011A	
X					Pages 005 – 006 Backflow Preventer Zurn Industries Model – 350A	
X					Pages 007 – 008 Standard Duty Loop Hanger Caddy Model – 115 Series	

X				Pages 009 – 010 Universal Beam Clamp Caddy Model – 300 Series	
X				Pages 011 – 016 Carbon Steel Anchor Screw Hilti Model – 3.3.5 KWIK HUS- EZ (KH-EZ1)	
X				Page 017 Riser Clamp PHD Manufacturing Model – Fig. 550-551-553	
X				Page 018 Universal Restraining Strap Afcon Model - 162	
X				Pages 019 – 027 Sleeve Expansion Anchors Powers Fasteners Model – Lok-Bolt Hex Head and Rod Hanger	
X				Pages 028 – 031 Strut Channel Gregory Strut Products Model – G712OS, G712A, G5820S, G582A and G1320OS	
X				Page 032 Surge Restraint 115 Caddy Model – SR6	
X				Page 033 Screw Anchor/Hanger ITW Model – Sammy X-Press	
		X		Pages 034 – 039 Quick Response Dry Pendent Sprinkler Viking Model - SIN Not Specified	1. SIN numbers listed in submittal (VK172, VK176, VK180 on pages 037/038) is not listed on the FP drawings in the Sprinkler schedule.
X				Pages 040 -043 Microfast Quick Response Upright Sprinkler Viking Model – SIN VK300	
		X		Pages 044 -049 Microfast Quick Response Pendent Sprinkler Viking Model – SIN VK302	1. SIN number listed in submittal (VK302 on pages 047/048) is not listed on the FP drawings in the Sprinkler schedule.

X				Pages 050 – 055 Microfast Quick Response Horizontal Sidewall Sprinkler Viking Model – SIN VK305	
X				Pages 056 – 059 Microfast Quick Response Upright Sprinkler Viking Model – SIN VK350	
		X		Pages 060 – 065 Microfast Quick Response Pendent Sprinkler Viking Model – SIN VK352 (K8.0)	1. SIN number listed in submittal (VK352 on pages 063/064) is not listed on the FP drawings in the Sprinkler schedule.
		X		Pages 066 – 071 Microfast Quick Response Pendent Sprinkler Viking Model – SIN VK352 (K8.0)	1. SIN number listed in submittal (VK352 on pages 069/070) is not listed on the FP drawings in the Sprinkler schedule.
X				Pages 072 – 077 Mirage Standard and QR Concealed Pendent Sprinkler Viking Model – SIN VK462	
X				Page 078 Spare Sprinkler Head Cabinet FPPI Model – Not indicated	
X				Page 079 – 089-091 Spare Sprinkler Head Cabinet TYCO Model – Not Indicated	
X				Pages 080 – 088 Sprinkler Escutcheons Viking Model -	
X				Pages 092 – 094 Sprinkler Guards Viking Model – D-1	
X				Pages 095 – 100 Standard / QR Extended Coverage Upright Sprinkler Viking Model – SIN VK532	
X				Pages 101 – 106 Standard / QR Extended Coverage Pendent Sprinkler Viking Model – SIN VK534	

X				Pages 107 – 112 Mirage QR Extended Coverage Concealed Pendent Sprinkler Viking Model – SIN VK634	
		X		Pages 113 – 120 Concealed Dry Pendant Sprinkler Reliable Model – G5-56 Dry (SIN RA5114)	1. Manufacturer and model/SIN number listed in submittal is not listed on the FP drawings in the Sprinkler schedule. 2. Color/finish of cover plate to be submitted to the Architect for review and approval.
X				Pages 121 - 124 Flexible Coupling Victaulic Model – Style 75	
X				Pages 125 - 128 Reducing Coupling Victaulic Model – Style 750	
X				Pages 129 – 131 FireLock Fittings Victaulic Model – Fire lock	
X				Pages 132 – 134 FireLock Rigid Coupling Victaulic Model – Style 005H	
X				Pages 135 – 136 Fire lock Flange Adapter Victaulic Model – Style 744	
X				Pages 137 – 144 Mechanical T Bolted Branch Outlets Victaulic Model – Styles 920 and 920N	
X				Pages 145 – 149 Firelock Rigid Coupling Victaulic Model – Style 009N	
X				Pages 150 – 151 Threaded Mechanical Branch Tee Anvil Model – Fig. MT-30	
X				Pages 152 – 153 Grooved Welded Steel Pipe Outlets Vandewater International Inc. Model - Various	
X				Pages 154 – 155 Welded Steel Pipe Outlets Vandewater International Inc. Model - Various	

X					Page 156 DI Threaded Fitting – 90 Elbow Anvil Model – Fig 3201	
X					Page 157 DI Threaded Fitting – 45 Elbow Anvil Model – Fig 3202	
X					Page 158 DI Threaded Fitting – Reducing 90 Elbow Anvil Model – Fig 3201R	
X					Page 159 DI Threaded Fitting – Straight T Anvil Model – Fig 3205	
X					Pages 160 - 161 DI Threaded Fitting – Reducing T Anvil Model – Fig 3205R	
X					Page 162 DI Threaded Fitting Anvil Model – Bull Head T	
X					Page 163 DI Threaded Fitting Cross Anvil Model - 3207	
X					Page 164 DI Threaded Fitting Anvil Model – 3221R	
X					Page 165 DI Threaded Fitting Anvil Anvil Model - 3121	
X					Page 166 DI Threaded Fitting Cap Anvil Model - 3224	
X					Page 167-168 DI Threaded Fitting Bushing Anvil Model - 3283	

				X	Pages 169 – 183 Flexible Sprinkler Hose Victaulic Model – Series AH2 Bracket AB1, AB7 and AB7 Adjustable	1. This product is not listed in the construction documents for use on this project. Contractor has elected to incorporate into the delegated design.
X					Pages 184 – 185 Water Flow Detector System Sensor Model – WFD Series	
X					Pages 186 – 192 Supervisory Switch Potter Electrical Model – PCVS Series	
	X				Pages 193 – 194 Electric Bell Potter Electric Model – Not Indicated	1. Specified to be 10 inch diameter. Refer to specification section 211313, part 2.6, B4 and B-7.
X					Page 195 Service Gauge Ashcroft Model – 35W1005PH02LXUL300	
X					Pages 196 – 199 Intumescent Sealant STI Model - Series LCI	
X					Page 200 Fire Pump Suction and Discharge Gauges Alenco Series AG-1000L	
X					Page 201 Suction and Discharge Gauge Assembly A-C Fire Pump systems Model – Not Indicated	
	X				Pages 202 – 203 Fire Pump Test Header Potter Roemer Model – 5864-x-x-6-D- NST	1. Assembly to be mounted vertically, in space available.
Note: Fire protection drawings list sprinkler Viking model Mirage, SIN VK464 (31 total) and Viking model Dry, Sin VK194, (24 total) in the Sprinkler Schedule. These two sprinkler heads are not included in this submittal.						

REVIEWED BY: Michael R. Whitworth DATE: December 20, 2016

THESE COMMENTS ARE TO BE ATTACHED TO ALL COPIES OF THE SHOP DRAWING REFERENCED ABOVE.

SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

PROJECT NAME	
ADDRESS	
NUMBER	
OWNER	
ARCHITECT / ENGINEER	
SUBMITTED BY	
CONTRACTOR / CM SUBMITTAL NO.	CANNON DESIGN SUBMITTAL NO.
DRAWING / DETAIL REFERENCE	SPECIFICATION SECTION / PARAGRAPH
MANUFACTURER / SUPPLIER	ITEM / PRODUCT ID
REQUIRED DATE	PRIORITY
CRITICAL	☐

To be completed by Reviewer

CANNON DESIGN SUBMITTAL NUMBER
RECEIVED DATE

- ☐ **A. No Exceptions Taken**
No further review of submittal is required.
- ☐ **B. Make Corrections Noted**
Incorporate corrections in work;
resubmission is not required.
- ☐ **C. Revise and Resubmit**
Revise as noted, and resubmit for review.
- ☐ **D. Rejected**
Submittal is not in compliance with Contract Documents;
provide new submittal.
- ☐ **E. For Record / Information Only**
Submittal was reviewed for Record / Information
purposes only.
- ☐ **F. Not Required for Review**
Submittal is not required by Contract Documents
and has not been reviewed.

Review is for conformance with the design concept of this project and for general compliance with contract documents. Contractor is responsible for quantities, dimensions and compliance with contract documents and for information that pertains to fabrication processes, construction techniques and coordination of this work with all trades which will be affected thereby. This review is null and void if submittal deviates from contract documents and does not indicate or note deviations.

ITEM BEING SUBMITTED (check only one)

- ☐ Shop Drawings ☐ Certification / Qualifications ☐ Coordination Drawing
☐ Samples ☐ Record Documents ☐ Calculations
 (_____ copies) ☐ Product Data ☐ Schedules
☐ LEED Submittal ☐ O&M Manuals
☐ Other

ITEM BEING SUBMITTED FOR (check only one)

- ☐ Action ☐ Information Only ☐ Record

REMARKS OR DEVIATIONS

CONTRACTOR / CM CERTIFICATION
(SUBMITTALS NOT CERTIFIED WILL BE RETURNED WITHOUT REVIEW)



PARIC CORPORATION
SUBMITTAL STAMP

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

Subcontractor remains responsible for dimensions, quantities, coordination with other trades and compliance with contract documents.

Ry:

By:
Devin D. Gates

REVIEWED BY	DATE

A/E COMMENTS

- ☐ See attached sheet(s) for additional comments

REVIEWED BY	DATE



77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0349

Paric Corporation

PROJECT: 15051-Webster University Interdisciplinary Science Building

DATE: 11/29/2016

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

Fax;
314-241-2203

RE: Wet Pipe Sprinkler System Product Data

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings	☒ Approval	☐ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	SENT VIA:	☐ Returned
☐ Specifications	☐ Attached	☐ Returned for Corrections
☒ Other: Product Data	☐ Separate Cover Via:	☐ Due Date:

Item	Package	Code	Rev.	Copies	Date	Description	Status
Submittal		211313-015	1		11/29/2016	Wet Pipe Sprinkler System Product Data	Submitted

NOTES:

CC:

Signed: _____
Devin Gates