

WEIL**2-Inch Submersible Wastewater Pump****1411**

Heavy duty pump for residential and commercial wet wells, elevator pits, etc.
Pump clear water and gray water with solids up to 3/4-inch diameter.

Disch. Size 2 Inch
Disch. Type NPT
Solids Max. 3/4 Inch
Mounting Style Floor

Pump

Case - Cast Iron
Impeller - Cast Iron
Strainer - 304 Stainless Steel
Stainless Steel Hardware

Options

Stainless Steel Lifting Cable

Motor**Single Seal**

- Carbon against Ceramic

Air-Filled Hermetically Sealed**Shaft - Stainless Steel Series 300**

Motor Shell - Cast Iron

Insulation - Class F

Ball Bearings - 2 - Double Sealed

Three-phase motor

- 1750 RPM

- 60 Hz, 208-230 or 460 volts

- Power Cable Length - 20 ft.

Single-phase capacitor start motor

- 1750 RPM

- 60 Hz, 115 volts

- Power Cable Length - 15 ft. with
3 conductor grounded plug

- Automatic reset thermal and
overload protection

**Flow - To prevent
solids from settling out**


Discharge Pipe Size Dia Inches	Minimum Flow GPM
1 1/2	15
2	25
3	50

Capacities - Wet Wells


Dia or Side Inches	Gallons per Foot of Depth	
	Round	Square
18	13	17
24	24	30
30	37	47
36	53	67
48	94	120
60	147	187
72	212	269

Good wet well design

Maximum 10 starts per hour.
Minimum run time - 1 1/2 minutes.

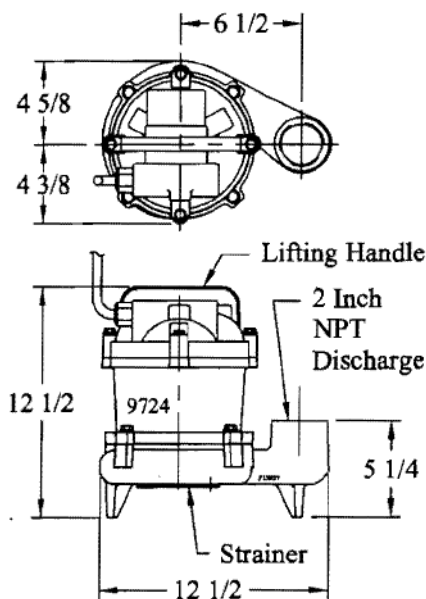

Impeller curve is Non-Overloading at any point on curve.

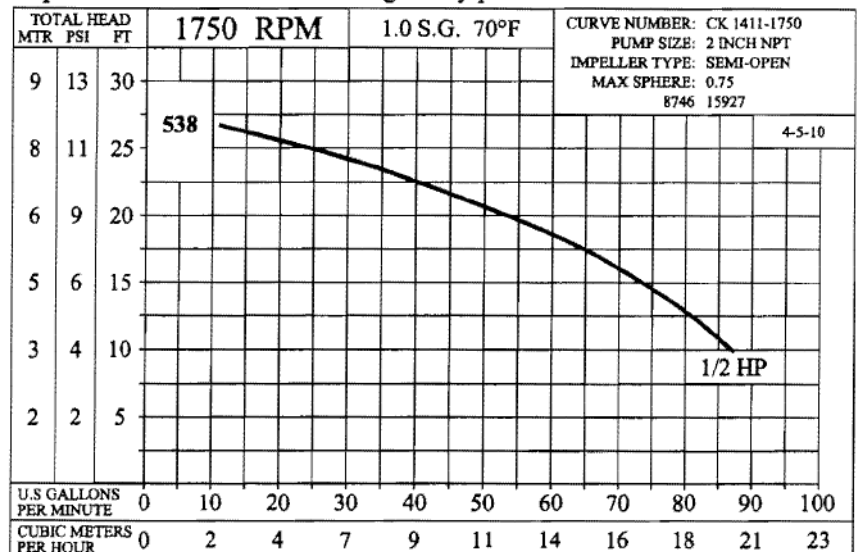

How to Order: Specify Model, Phase and Volts.

SN-1411-A-3




Replaces SN-1411, Jan. 1, 2009

SN-1411

APRIL 1, 2010

1411



Engineered Equipment Sales

Division of Debco Equipment Company, Inc.

1814 South Third Street
Saint Louis, MO 63104-4040

Submittal

314.646.0074 Phone
314.646.0078 Fax

May 11, 2016

To: Ferguson

Project: Webster University Science

We are pleased to submit the following equipment for your approval

SP-3

One (1) **Weil 1411** submersible 2" wastewater pumps. The pump will be capable of handling 1/2" solids, will have a capacity of 25gpm at 25tdh, and will be powered by a 1/2hp, 1750rpm, 115/1 motor. The pump will be controlled off/on by a differential float switch with a piggy back three prong grounded plug. A Weil 8341K1011 high water alarm and includes a Weil 8233K1006 tethered float. The basin will be fiberglass and will be 36" in diameter and 108" deep. We will provide a H600R ringer grommet for the 6" inlet pipe (field installed). The basin cover will be a Topp C36SSA.

Sincerely,

Mike Busse

Michael D. Busse

This proposal incorporates our standard terms and conditions by reference. If you do not have a copy contact us immediately.

Subject to Factory Standard Warranty

Proposals good for 30 days



W1411

WEIL

SP-3
WEIL SUMP PUMP SYSTEM

Shop Drawing Submittal Review

Transmitted To: Cannon Design

Date: June 3, 2016

Attention: stl-cac@cannondesign.com

Contact Person / WTA Field Inspector:
Patrick Garner

Project Name: Webster University-**ISB**

Reviewed by: Mike Whitworth (WES)

Project No. WT 14127.01
WES 607

☐

UPS

☐

Courier

☒

Email

Copies	No.	Description
1 PDF	221429P01	(Submittal No.'s:
		(Cannon #-22 1429-003) - (Paric #15051-) - (WES #607)
		➤ Sump Pumps Product Data:
		• Sump Pumps SP-1, SP-2 & SP-3
		• Elevator Sump Pumps ESP-1 & ESP-2

***Remarks: See Submittal Review from Webb Engineering.**

c: Kevin Patel
Kpatel@cannondesign.com

☒

***Reviewed**

☒

***No Exception Taken -**

☐☒

***Make Corrections as
Noted, No Resubmittal
Required**

Corrections or comments made on shop drawings during this review do not relieve contractor from compliance with requirements of drawings and specifications. This check is only for review of general conformance with the design concept of project and general compliance with information given in contract documents. Contractor is responsible for: confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordinating his work with that of all other trades; and performing his work in a safe and satisfactory manner.



1400 S. 3rd Street, Suite 201
St. Louis, Missouri 63104
Phone: (314) 588-0600
Fax: (314) 588-0604

Letter of Transmittal

To: wtashop@wmtao.com

From: Mike Whitworth

Date: June 03, 2016

Re: Webster University ISB

WES No: 607

☐ For your Files

☐ For Review

☐ Please Comment

☐ Please Reply

Item No.	Description	No. of Copies	Date
1	Shop Drawing Review – 22 1429-003 Sump Pumps	1	06-03-2016

•Signature: Mike Whitworth

The review of this submittal is limited to the general conformance with the designated design concept and intent of this project and with the general compliance of the information provided in the contract documents. All comments, remarks and notations made on the submittal(s) as a result of this review do not relieve the contractor from full compliance with requirements of the contract documents. Approval for a specific item shall not include approval of an assembly of which the item is not a component. The contractor is solely responsible for rough-in and installation confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordination of this work with that of other trades on this project; and in a safe and satisfactory manner. All work shall be installed in full compliance with the manufacturer's recommendation Federal, State and Local rules and regulation and the Authority Having Jurisdiction (AHJ) and applicable adopted codes and standards.

PROJECT NAME: WU-ISB
 LOCATION: St. Louis, MO
 CLIENT PROJ. NO.: NA
 WES PROJ. NO.: 608
 SPEC SECTION: 22 1429-003
 SUBMITTAL ITEM: See Below -

CONTRACTOR: DeLuca Plumbing LLC
 CTR. SUBMITTAL #: 221429-003
 SUBMITTAL DATE: May 25, 2016
 DATE RECEIVED: May 26, 2016
 RECEIVED VIA: E-Mail
 RECEIVED FROM: WTA
 DATE RETRND: June 03, 2016
 RETURNED VIA: E-Mail
 RETURNED TO: wtashop@wmtao.com

STATUS KEY:

NO EXCEPTION TAKEN							
NEC	MCN	MAKE CORRECTIONS NOTED, NO RESUBMITTAL IS REQUIRED:					
		AMEND AND RESUBMIT					
		AAR	REJ	REJECTED, SEE REMARKS:			
				REVIEWED ONLY			
				REV	ITEM	REMARKS	
X					Sump Pump SP-1 and SP-2 Weil Pump Co. Model 2224 – 4 Inch Vertical Wastewater Pump Model 8211K2014 Pedestal Switch Model 8211K7015 Auxiliary Switch for High Water Alarm Model 8155T-100 Control Panel Fiberglass Basin – 36 x 108 Model 8805K1316S Basin Cover		
X					Sump Pump SP-3 Weil Pump Co. Model 1411 - 2 Inch Submersible Wastewater Pump Model 8341K1011 High Water Remote Alarm Panel Model 8233K1006 Tethered Float Fiberglass Basin – 36 x 108 Model 8805K1316K Basin Cover		
	X				Elevator Sump Pumps ESP-1 and ESP-2 Weil Pump Co. Model 1411-OSS Elevator Pump System	There are two separate elevator sump pump systems required. One for each of the hoistway pits	

REVIEWED BY: Mike Whitworth DATE: June 03, 2016

THESE COMMENTS ARE TO BE ATTACHED TO ALL COPIES OF THE SHOP DRAWING REFERENCED ABOVE.

SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

PROJECT NAME	
ADDRESS	
NUMBER	
OWNER	
ARCHITECT / ENGINEER	
SUBMITTED BY	
CONTRACTOR / CM SUBMITTAL NO.	CANNON DESIGN SUBMITTAL NO.
DRAWING / DETAIL REFERENCE	SPECIFICATION SECTION / PARAGRAPH
MANUFACTURER / SUPPLIER	ITEM / PRODUCT ID
REQUIRED DATE	PRIORITY
CRITICAL	☐

To be completed by Reviewer

CANNON DESIGN SUBMITTAL NUMBER
RECEIVED DATE

- ☐ **A. No Exceptions Taken**
No further review of submittal is required.
- ☐ **B. Make Corrections Noted**
Incorporate corrections in work;
resubmission is not required.
- ☐ **C. Revise and Resubmit**
Revise as noted, and resubmit for review.
- ☐ **D. Rejected**
Submittal is not in compliance with Contract Documents;
provide new submittal.
- ☐ **E. For Record / Information Only**
Submittal was reviewed for Record / Information
purposes only.
- ☐ **F. Not Required for Review**
Submittal is not required by Contract Documents
and has not been reviewed.

Review is for conformance with the design concept of this project and for general compliance with contract documents. Contractor is responsible for quantities, dimensions and compliance with contract documents and for information that pertains to fabrication processes, construction techniques and coordination of this work with all trades which will be affected thereby. This review is null and void if submittal deviates from contract documents and does not indicate or note deviations.

ITEM BEING SUBMITTED (check only one)

- ☐ Shop Drawings ☐ Certification / Qualifications ☐ Coordination Drawing
☐ Samples ☐ Record Documents ☐ Calculations
 (_____ copies) ☐ Product Data ☐ Schedules
☐ LEED Submittal ☐ O&M Manuals
☐ Other _____

ITEM BEING SUBMITTED FOR (check only one)

- ☐ Action ☐ Information Only ☐ Record

REMARKS OR DEVIATIONS

CONTRACTOR / CM CERTIFICATION
(SUBMITTALS NOT CERTIFIED WILL BE RETURNED WITHOUT REVIEW)



PARIC CORPORATION
SUBMITTAL STAMP

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

Subcontractor remains responsible for dimensions, quantities, coordination with other trades and compliance with contract documents.

Ry:

By:
Devin D. Gates

REVIEWED BY	DATE

A/E COMMENTS

- ☐
- See attached sheet(s) for additional comments

REVIEWED BY	DATE



77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0051

Paric Corporation

PROJECT: Webster University Interdisciplinary Science Building

DATE: 05/25/2016

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

RE: Sump Pumps Product Data

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:		SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings		☒ Approval	☒ Approved as Submitted
☐ Letter		☐ Your Use	☐ Approved as Noted
☐ Prints		☐ As Requested	☐ Returned After Loan
☐ Change Order		☐ Review and Comment	☐ Resubmit
☐ Plans			☐ Submit
☐ Samples		SENT VIA:	☐ Returned
☐ Specifications		☐ Attached	☐ Returned for Corrections
☒ Other: Product Data		☐ Separate Cover Via:	☐ Due Date:

Item	Package	Code	Rev.	Copies	Date	Description	Status
Submittal		221429-003	1		05/25/2016	Sump Pumps Product Data	Submitted

NOTES:

CC: Paric Corporation, Kathy Bathe

Project Coordinator: Paric Corporation, Kathy Bathe

Signed: _____
Devin Gates

Shop Drawing Submittal

Project Name: WEBSTER ISB

Specification # **221429-01**

Specification Description: SUMP PUMPS
SP1-SP3 & ESP-1 – ESP-2

Date: 05-23-16

General Contractor / Construction Manager: PARIC

ARCHITECT: KWA

ENGINEER: William Tao

Contractor: DeLuca Plumbing, L.L.C.
8465 Delport Drive
St. Louis, MO 63114

Supplier: FERGUSON

Manufacturer: Various

Reviewed & Approved by: DeLuca Plumbing 05-23-16

Action: Forward to GC/CM for Review & Approval

--