

HVL™ 5–38 kV Load Interrupter Switchgear

The Standard for Performance, Protection
and Dependability



SQUARE D™

by Schneider Electric



For a generation of engineers, Square D™ High Voltage Load (HVL™) Interrupter Switchgear by Schneider Electric has set the standard for performance, protection and dependability in metal-enclosed switchgear. From the beginning, we've had a reputation for quality, service and technical innovation.

Today, Schneider Electric continues to engineer, supply and service all the components of a unit substation.

[We believe in giving you choices]

Setting the Standard for Metal-enclosed Switchgear

Square D HVL 5–38 kV load interrupter switchgear from Schneider Electric is the most popular ANSI-rated switchgear in its class in America. Among medium voltage interrupter switchgear, both the switch and the enclosure stand as industry benchmarks in the areas of design, manufacturing and performance.

Load interrupter switchgear must perform a number of critical functions in a unit substation – protecting equipment and disconnecting faulted lines and transformers. Designed and tested to the latest applicable standards, HVL has been engineered to provide superior protection for your distribution system. That's why HVL switchgear is chosen for more installations than any other ANSI-rated load interrupter equipment.

HVL switchgear is available for various applications and configurations:


- Individual service entrance bays
- Multiple-bay lineups incorporating HVL load interrupters and optional VISI-VAC circuit interrupters
- Substation primaries
- Main-Tie-Main VISI-VAC circuit interrupters with HVL load interrupter switches as feeders

Square D metal-enclosed switchgear has become an industry standard for its superior system performance, low maintenance cost, easy system expansion and reduced system expense.

The Square D medium voltage current limiting fuse sets the standard for features and protection. The extended travel blown fuse indicator provides more travel to positively operate the optional FuseLogic™ protection system.

The FuseLogic protection system prevents closing of the HVL switch if a fuse is blown or has not been installed. This reduces operator error and the potential of equipment damage due to single phasing. The FuseLogic protection system can be used to operate auxiliary contacts for optional local and/or remote indication.

FuseLogic Direct Acting Fuse Tripping Sequence

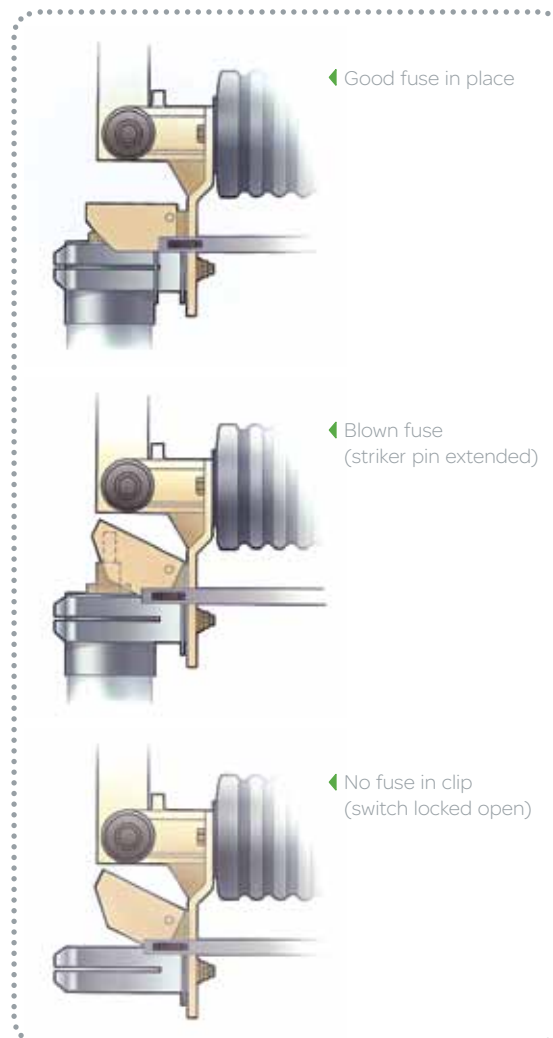


HVL Switch

Square D HVL 5–38 kV Load Interrupter Switch

Solutions

When it came time to choose a contractor for a new joint-venture steel plant, the purchasing manager gave the \$4 million contract to Schneider Electric.

"I wanted the best engineering support, proven ability to meet schedules, technical contacts, open lines of communication and thorough follow-up," he said. "I wanted the best value." Schneider Electric provided 13.8 kV metal-clad and HVL load interrupter switchgear, 13.8 kV single-ended indoor unit substations, 13.8 kV three-phase, dry-type and oil-filled transformers and all the other equipment needed to handle more than fifty megawatts of electricity. The Schneider Electric reputation for quality was what made the difference, the purchasing manager said. "Our lines run 24 hours a day, seven days a week. The entire power distribution system has to work perfectly all the time."

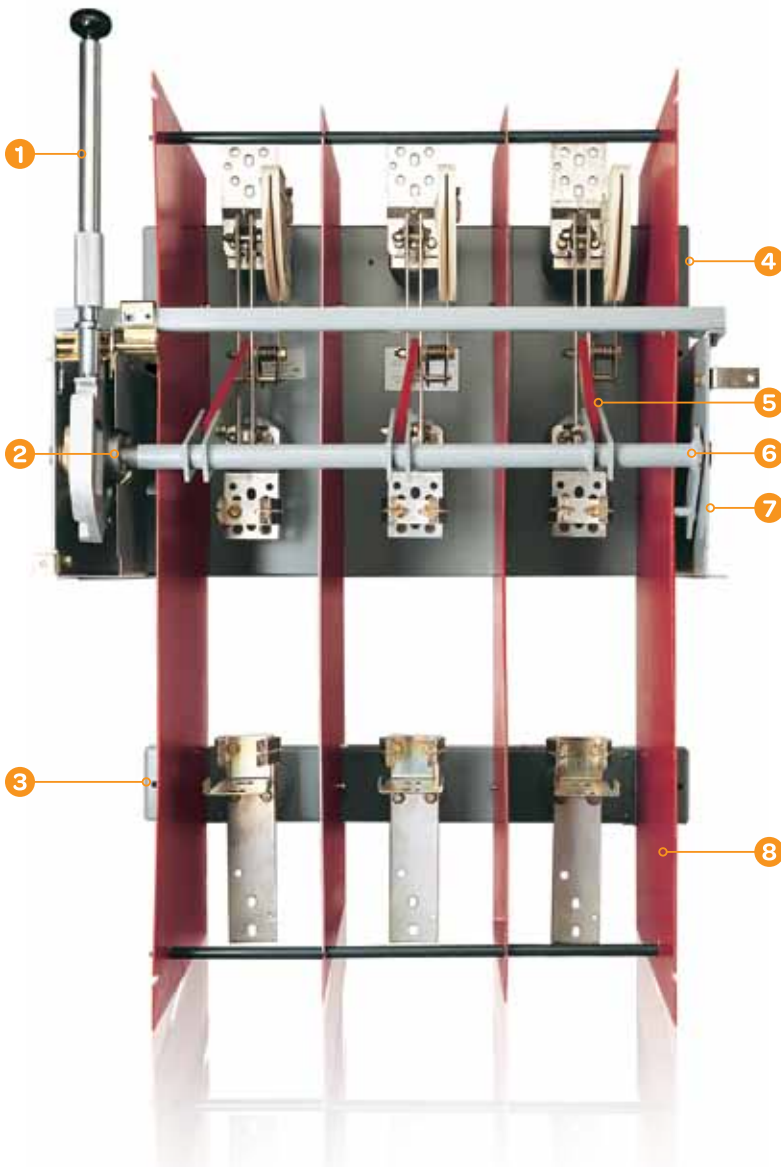

- 1 Permanently attached direct-acting handle with padlocking provisions in open and closed positions
- 2 Stored energy switch operating mechanism
- 3 Lower fuse clip assembly mounting channel
- 4 One-piece switch frame supports entire switch assembly
- 5 High strength glass-polyester insulating links with track resistant coating
- 6 Switch drive shaft and connecting linkage
- 7 Travel stop
- 8 Full length glass fiber reinforced polyester phase barriers

◀ Open style switch shown. The HVL switch is also available for OEM customers.

The Best Engineered Enclosure

The enclosure for the HVL 5–38 kV load interrupter switch is as carefully designed as the switch itself. It features the same rigorous engineering that goes into all Square D switchgear products. In fact, it's the same compact enclosure that's used for VISI-VAC switchgear.

Our common enclosure, modular in construction, bolted and riveted for strength, allows for significant flexibility in configuring metal-enclosed switchgear. More flexibility gives you more options. For example, you can specify a duplex HVL configuration, and also include the increased function of a VISI-VAC circuit interrupter. In the same lineup, this common construction allows standardization of the cubicle and its associated components. It also permits the integration of the HVL load interrupter switch and the VISI-VAC circuit interrupter into a continuous, modular, space-efficient lineup.




Indoor NEMA
Type 1, 5/15 kV (left)

Outdoor NEMA
Type 3R, 5/15 kV (right)



The Best Engineered Switch

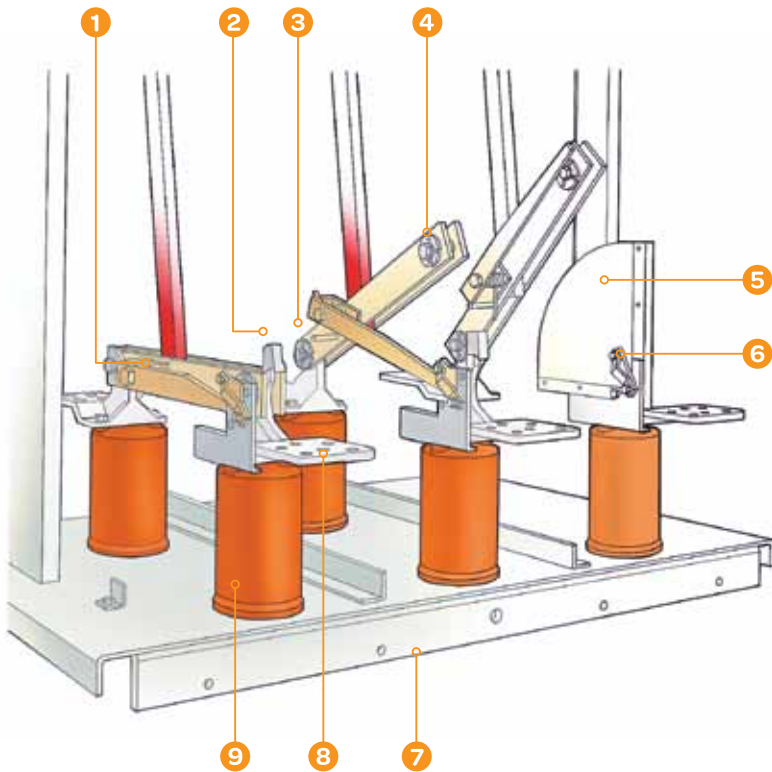




- | | |
|--|---|
| <p>1 Arcing blade with copper tungsten tip</p> <p>2 Stationary switch main contact with arcing tip which endures the closing arc</p> <p>3 Limit stop to insure proper contact latch</p> <p>4 Main movable contact consists of two silvered copper blades. Closing arc occurs at the blade ends – not in the main contact area</p> <p>5 Arc chutes which help extinguish the arc</p> | <p>6 Copper tungsten tipped stationary arcing contacts. Heat-resistant cantilever springs constantly maintain correct contact pressure</p> <p>7 One-piece frame supports the entire assembly</p> <p>8 Switch terminal connectors suitable for cable lugs or a bus connection</p> <p>9 NEMA Class A-20/A-30 Supertrack (1500 min track resis) insulators</p> |
|--|---|

An important design feature is the HVL load interrupter's direct-drive operating mechanism. Our engineers concluded that chain-drive systems were simply too unreliable, so they created a chainless direct drive. The result is one of the most dependable and consistent load interrupter switches in the industry.

The same spirit of engineering innovation can be seen in the way arc interruption is handled by the HVL switch. There are separate paths for current and for arcing. During the opening operation, the main blades completely disconnect and transfer the current to the arcing path. The arc is then forced to travel through the arc chute, where it is extinguished. This sequence of operation prevents erosion of the main contacts caused by arcing during the interruption of the load current.

To minimize the potential of catastrophic phase-to-phase faults, all live parts of HVL switchgear are mounted on insulators attached to the grounded sheet metal of the enclosure.

HVL Arc Interruption Sequence

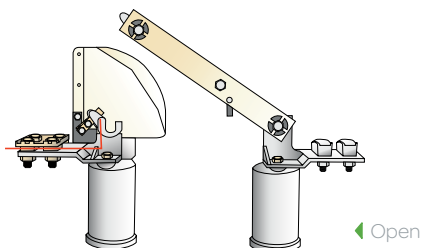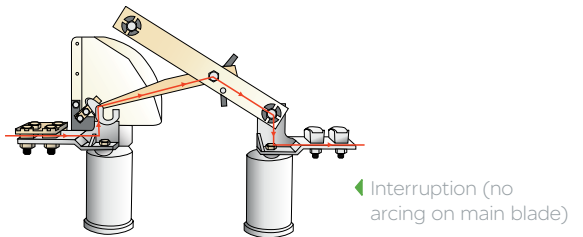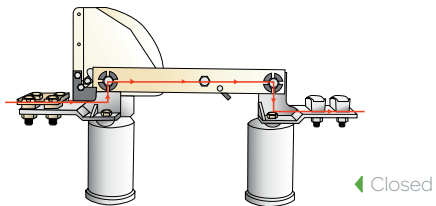

Note: Red line indicates load current.

The enclosure containing the HVL load interrupter is available in single- or multiple-bay configurations. It can be close-coupled to a transformer for unit substation applications or to HVL/cc™. There are HVL enclosures (including walk-in enclosures) for both indoor (NEMA Type 1) and outdoor (NEMA Type 3R) applications.

The optional low voltage compartment mounted on the medium voltage door can contain power metering, pilot lights and customer LV terminal points.

The enclosures are constructed of 11-gauge formed steel and have the toughest finish in the industry – TGIC polyester powder paint. TGIC resins offer excellent mechanical properties, corrosion and exposure protection, edge coverage and are also environmentally friendly. TGIC polyester powder paint has proven to be superior to any other paint system available today. In addition, the enclosure door of HVL switchgear gives access only to the fuses when the switch is open. The blades can be viewed through a Lexan window mounted in the permanently attached upper panel.

Optional System Features

Transparent Ready™: Web-enabled Power and Control

HVL 5–38 kV load interrupter switchgear with PowerLogic™ circuit monitors and web-enabled Ethernet communication devices is a part of Square D by Schneider Electric's Transparent Ready power equipment family.

When specified as Transparent Ready, the power equipment is provided with a factory configured “plug and play” communications system that allows the authorized user access to equipment status and monitoring information using only a standard web browser. Ask your local Schneider Electric field sales representative for details about Transparent Ready power distribution equipment.



◀ Duplex configuration (transformer connection on right)

▶ The PowerLogic Series 4000 circuit monitor (CM4000) features all basic and advanced metering functions while providing a 0.04% typical accuracy rate



▶ The H.VIR COMET infrared inspection window




Optional Infrared Inspection Window

Ideal for installation in HVL 5–38 kV load interrupter switchgear, the H.VIR COMET™ infrared inspection window enables permanent access for electrical component inspection without disturbing operations. Specially developed for infrared inspections and distributed exclusively by Schneider Electric, the window is made of a glass-like material that is transparent for infrared rays. This product is a UL-recognized component for NEMA Type 3 and Type 12 equipment, and is available in 2 in., 3 in. and 4 in. diameters for either shortwave or longwave transmission.

The Best Service

Since a medium voltage load interrupter is essential to the dependable operation of a power distribution system, service and support are vital elements of a successful installation and continuing operation. Schneider Electric has one of the largest engineering and service teams in the industry to provide a level of support unmatched by any other manufacturer.

Dimensions

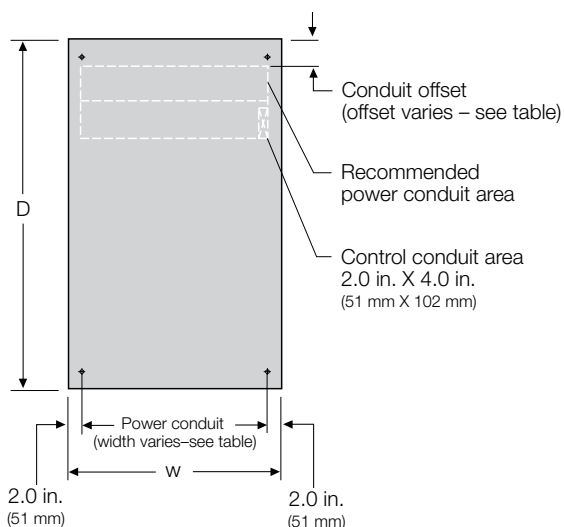

Layout Dimensions

kV	Height in. (mm)	Width (W) in. (mm)	Depth (D) in. (mm)	Weight in. (mm)
5/15 Indoor	90.0 (2286)	38.0 (965)	54.5 (1384)	1200 (545)
5/15 Outdoor	90.0 (2286)	38.0 (965)	46.5 (1181)	1000 (454)
25 Indoor	97.5 (2477)	38.0 (965)	60.0 (1524)	1400 (636)
25 Outdoor	114.0 (2896)	48.0 (1219)	80.0 (2032)	2000 (908)
29 Indoor	121.0 (3073)	48.0 (1219)	86.0 (2184)	2500 (1135)
29 Outdoor	121.0 (3073)	48.0 (1219)	86.0 (2184)	2500 (1135)
38 Indoor	127.0 (3226)	60.0 (1524)	80.0 (2032)	2200 (999)
38 Outdoor	127.0 (3226)	60.0 (1524)	86.0 (2184)	2700 (1226)

Recommended Power Conduit Area

kV Rating	Conduit Width in. (mm)		Conduit Offset in. (mm)	
	Indoor (NEMA 1)	Outdoor (NEMA 3)	Indoor (NEMA 1)	Outdoor (NEMA 3)
5–15 kV	34 (864)	34 (864)	4 (102)	6 (152)
25 kV	44 (1118)	40 (1016)	4 (102)	4 (102)
38 kV	56 (1422)	52 (1321)	4 (102)	4 (102)

HVL Load Interrupter Switch Ratings

Nominal Voltage (kV) ^[1]	4.16			13.8			16.5	24.9		29.0		34.5
Maximum Design Voltage (kV)	4.76			15.0			17.0	25.8		29.0		38.0
BIL (kV)	60			95			95	125		125		150
Frequency (Hz)	50/60			50/60			50/60	50/60		50/60		50/60
Continuous Amperes	600	1200	1200	600	1200	1200	600	600	1200	600	1200	600
Interrupting Amperes	600	1200	1200	600	1200	1200	600	600	1200	400		400
Fault Close (kA asymmetrical rms)	40	61	61	40	61	61	40	28		28		20
Fault Close (kA symmetrical rms)	25	38	38	25	38	38	25	17.5		17.5		12.5
Momentary Current (kA asymmetrical 10 Cycle)	40 ^[2]	61	80	40 ^[2]	61	80	40	40	61	40	61	40
Capacitor Switching (kVAR)	2400	2400	—	2400	2400	—	—	—		—		—
Short-Time Current (kA 2 seconds)	25	38	48	25	38	48	25	25		25		25
Dielectric Withstand (kV 1 minute)	19			36			36	60		60		80

^[1] 5–15 kV switches are UL Listed

^[2] 61 kA momentary current rating is available as an option

Note: Grayed areas are not UL Listed

 For additional information on HVL 5–38 kV load interrupter switchgear, contact your local Schneider Electric sales representative, or call 1-888-SQUARED.

Schneider Electric USA, Inc.

1415 S. Roselle Road
Palatine, IL 60067
Tel: 847-397-2600
Fax: 847-925-7500
www.schneider-electric.us

As standard specifications and designs change from time to time, please ask for confirmation of the information given in this publication

 This document has been printed on recycled paper

Shop Drawing Submittal Review

Transmitted To: Cannon Design

Date: July 19, 2016

Attention: stl-cac@cannondesign.com

Contact Person / WTA Field Inspector:
Patrick Garner

Project Name: Webster University-**ISB**

Reviewed by: Bill Shaw

Project No. WT 14127.01

☐

UPS

☐

Courier

☒

Email

Copies	No.	Description
1 PDF	264000E01	(Submittal No. 264000-001) Electrical Distribution

Submittal Review Comments

Circuit breaker size and position shall match panel schedules on sheets E0503, 504, 505, & 506.

c: Kelvin Patel
Kpatel@cannondesign.com

☐ Furnish as Submitted

☐ Furnish as Noted

☐ Rejected

☒ ***Revise & Resubmit**

☐ Reviewed

☐

Corrections or comments made on shop drawings during this review do not relieve contractor from compliance with requirements of drawings and specifications. This check is only for review of general conformance with the design concept of project and general compliance with information given in contract documents. Contractor is responsible for: confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordinating his work with that of all other trades; and performing his work in a safe and satisfactory manner.

WTASHOP - Webster ISB - 26 4000-001

From: STL-CAC <STL-CAC@CANNONDESIGN.COM>
To: 'Patrick Garner' <pgarner@wmtao.com>, WTASHOP <wtashop@wmtao.com>
Date: 7/5/2016 11:40 AM
Subject: Webster ISB - 26 4000-001
Cc: "Patel, Kelvin" <kpatel@CANNONDESIGN.COM>, "Grossman, Lynn" <lgrossman@C...>
Attachments: 264000-001 Electrical Distribution.pdf

Attached for review.

Melissa Pirtle

Construction Admin

CANNONDESIGN

1100 Clark Ave
St. Louis, Missouri 63102
T [314.425.8797](tel:314.425.8797) • M
cannondesign.com

SUBMITTAL IDENTIFICATION SHEET

To be completed by Contractor/CM

PROJECT NAME	
ADDRESS	
NUMBER	
OWNER	
ARCHITECT / ENGINEER	
SUBMITTED BY	
CONTRACTOR / CM SUBMITTAL NO.	CANNON DESIGN SUBMITTAL NO.
DRAWING / DETAIL REFERENCE	SPECIFICATION SECTION / PARAGRAPH
MANUFACTURER / SUPPLIER	ITEM / PRODUCT ID
REQUIRED DATE	PRIORITY
CRITICALITY	

To be completed by Reviewer

CANNON DESIGN SUBMITTAL NUMBER
RECEIVED DATE

- ☐ **A. No Exceptions Taken**
No further review of submittal is required.
- ☐ **B. Make Corrections Noted**
Incorporate corrections in work;
resubmission is not required.
- ☐ **C. Revise and Resubmit**
Revise as noted, and resubmit for review.
- ☐ **D. Rejected**
Submittal is not in compliance with Contract Documents;
provide new submittal.
- ☐ **E. For Record / Information Only**
Submittal was reviewed for Record / Information
purposes only.
- ☐ **F. Not Required for Review**
Submittal is not required by Contract Documents
and has not been reviewed.

Review is for conformance with the design concept of this project and for general compliance with contract documents. Contractor is responsible for quantities, dimensions and compliance with contract documents and for information that pertains to fabrication processes, construction techniques and coordination of this work with all trades which will be affected thereby. This review is null and void if submittal deviates from contract documents and does not indicate or note deviations.

ITEM BEING SUBMITTED (check only one)

- ☐ Shop Drawings ☐ Certification / Qualifications ☐ Coordination Drawing
☐ Samples ☐ Record Documents ☐ Calculations
 (_____ copies) ☐ Product Data ☐ Schedules
☐ LEED Submittal ☐ O&M Manuals
☐ Other

ITEM BEING SUBMITTED FOR (check only one)

- ☐ Action ☐ Information Only ☐ Record

REMARKS OR DEVIATIONS

CONTRACTOR / CM CERTIFICATION
(SUBMITTALS NOT CERTIFIED WILL BE RETURNED WITHOUT REVIEW)



PARIC CORPORATION
SUBMITTAL STAMP

THIS SHOP DRAWING HAS BEEN REVIEWED BY PARIC CORPORATION

Subcontractor remains responsible for dimensions, quantities, coordination with other trades and compliance with contract documents.

Ry:

By:
Devin D. Gates

REVIEWED BY	DATE

A/E COMMENTS

- ☐
- See attached sheet(s) for additional comments

REVIEWED BY	DATE



77 Westport Plaza
Suite 250
St. Louis, MO 63146

TRANSMITTAL

No. 15051-0114

Paric Corporation

PROJECT: 15051-Webster University Interdisciplinary Science Building

DATE: 07/05/2016

TO: Cannon Design
1100 Clark Ave
St Louis MO 63102

RE: Electrical Distribution

ATTN: Kelvin Patel

JOB: 15051

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings	☒ Approval	☐ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	SENT VIA:	☐ Returned
☐ Specifications	☐ Attached	☐ Returned for Corrections
☒ Other: Product Data	☐ Separate Cover Via:	☐ Due Date:

Item	Package	Code	Rev.	Copies	Date	Description	Status
Submittal		264000-001	1		07/05/2016	Electrical Distribution	Submitted

NOTES:

CC: Paric Corporation, Kathy Bathe

Project Coordinator: Paric Corporation, Kathy Bathe

Signed: _____
Devin Gates

Transmittal

To Paric Corporation

Date 7/1/16

Job Number 11317

Job Name Webster Univ. ISB Building

Attention Devin Gates

Transmittal Number 11317-005

We are sending you:

☒ Attached

☐ Under separate cover, the following:

☐ Preliminary Drawings

☐ Samples

☐ Construction Drawings

☐ Copy of Letter

☐ Specifications

☐ Other _____

Quantity	Drawing #	Date/Revision	Description
1			Submittal for Distribution - Spec Section
			26 40 00

These are transmitted as checked:

☒ For Your Review & Comment

☐ Approved As Noted

☒ For Approval

☐ Returned For Corrections

☐ For Your File

☐ Approved As Submitted

☐ As Requested

☐

Copy:

Transmittal

Enclosure

Rick Branstetter

Signed: Rick Branstetter, Project Manager

Webster University ISB

Approval Drawing Package

Factory Order #: 37999262

06/13/2016

Distributor:
Graybar

Contractor/Installer:
Guarantee Electric / TD4

Consulting Engineer:
Wm Tao & Associates

Lou Feldhaus
Sales Representative

Jake Kaufman
Project Manager
North American Operating Division
(636) 329-2265
jacob.kaufman@schneider-electric.com

Life Is On



TABLE OF CONTENTS

UNIT SUBSTATIONS

BILL OF MATERIALS AND DRAWINGS

UNIT SUBSTATION 1: US-1

METAL-ENCLOSED SWITCHGEAR: US-1

POWER-DRY II TRANSFORMER: US-1

SWITCHBOARD: US-1

UNIT SUBSTATION LITERATURE

Unit Substation Brochure

HVL 5...38 kV Load Interrupter Switchgear - Brochure

Power Dry II- Dry-Type, Small Power Transformer Brochure

Model 98A Digital Temperature Controller For Medium Voltage Transformers

Power-Style QED-2 Switchboard Brochure

Internal Modular SPD Brochure

PowerLogic PM8000 Series Intermediate Metering Technical Data Sheet

NW Breaker Brochure

Micrologic Trip Units for Masterpact Circuit Breakers Brochure

INTEGRATED POWER CENTERS

BILL OF MATERIALS AND DRAWINGS

SB1

SB2

1EH1 - 1EL1

1EL1

1SH1 - 1SL1

LITERATURE

Integrated Power Center 2 (IPC2)

PANELBOARDS

PANELBOARD SCHEDULE AND DRAWINGS

LITERATURE

I-Line Panelboard Handout

NF Panelboard Handout

NQ Panelboard Handout

I-Line SPD

Internal Modular SPD Brochure

SurgeLoc SPD for NQ Panelboards

CONTACTORS AND STARTERS

BILL OF MATERIALS AND DRAWINGS

8538SCG

8538SCA - EF-1

8538SCA - KEF-1

2510FG

LITERATURE

Manual Starters - Type F

Manual Starters - Type M and T

8538 Combination Starter Catalog

SAFETY SWITCHES

BILL OF MATERIALS AND DRAWINGS

D211N

H365

HU361

H361

HU362

POWER MONITORING AND CONTROL

BILL OF MATERIALS

LITERATURE

MCTAS-485 Terminator

FUSE

BILL OF MATERIALS

LITERATURE

LPJ Fuses 1 - 60 Amps

LPJ Fuses 70 - 600 Amps