

**Job Name:**

WEBSTER UNIVERSITY INTERDISCIPLINARY
SCIENCE BUILDING - FIXTURE QUOTE
Engineer: WILLIAM TAO AND ASSOCIATES
(SAINT LOUIS)

Catalog Number:

V3SKID-GRO-LED-80-500-30-15'6"-
277-D (.1% ELDO LED)-1-DTL-W
Notes:

Type:**RC15-6-.1%**

LAI16-104794

VIA SKIM 3 LED

RECESSED



LUMENWERX
WWW.LUMENWERX.COM



Via skim recessed deep

DESCRIPTION

Via Skim is designed to illuminate textured or polished vertical surfaces with a grazing light from the wall/ceiling intersection. Via Skim provides continuous illumination across the wall surface.

The intense light distribution is achieved with our Grazing Reflector Optic (GRO) oriented to project light with maximum luminous intensity at 5° from nadir.

The Via Skim is available with two depth options: shallow and deep. Total recessed depth ranges from 4 3/4" to 7".

PROJECT: _____

TYPE: _____

NOTES: _____


ORDER GUIDE**IC RATED**

LUMINAIRE ID	GRO	LED	CRI	LUMEN PACKAGES	COLOR TEMP.
OPTICS	LIGHT SOURCE				
V3SKIS - via skim 3 recessed shallow	GRO - grazing reflector optic	LED - high performance LED	80 - 80CRI	350 - low output 350lm/ft	30 - 3000k
V3SKID - via skim 3 recessed deep			90 - 90CRI	500 - med output 500lm/ft	35 - 3500k
				750 - high output 750lm/ft	40 - 4000k

LUMINAIRE LENGTH	VOLTAGE	DRIVER	ELECTRICAL	MOUNTING
Standard sections - 2', 3', 4', 5', 8' & 12'	120 - 120V	D - dimming 0-10V	1 - 1 circuit	TG9 - tegular 9/16"
For all other specify length	277 - 277V	DA - Dali	+EB - emergency battery pack (for min 4' fixture)	TG15 - tegular 15/16"
#FT - nominal length in feet	UNV - 120V-277V	LA2 - Lutron Hi-Lume A - 2 wires 120V	+EM - emergency light circuit	TB9 - t-bar 9/16"
#IN - length in inches	347 - 347V	LA3 - Lutron Hi-Lume A - 3 wires/EcoS	+NL - night light circuit	TB15 - t-bar 15/16"
Continuous Run - for luminaires over 12'		LEH - Lutron EcoSystem H	+GTD - generator transfer device	ST - screw slot t-bar
Minimum Individual section 2'		LE5 - Lutron EcoSystem 5		DTL - drywall trimles
		OTH - other (consult factory)		

See page 2 for ordering code detailed information

FINISH	OPTIONS
W - matte white	FU - fuse
CF# - custom finish specify RAL#	FWC - flexible whip cable (6' std)
	CP - Chicago Plenum
	CU - custom


CROSS SECTION

V3SKIS - via skim shallow

V3SKID - via skim deep

OPTICS

GRO - Grazing Reflector Optic

LIGHT DISTRIBUTION

V3SKIS - via skim shallow

TECHZONE™ & USG Compatible with 4" ceiling

File Name: VIA-SKIM3-RECESSED-SPEC

Page: 1 / 4

October 31, 2016

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to LumenWerx ULC.
LumenWerx ULC. reserves the right to change or modify product specifications without notification



**Job Name:**

WEBSTER UNIVERSITY INTERDISCIPLINARY
SCIENCE BUILDING - FIXTURE QUOTE
Engineer: WILLIAM TAO AND ASSOCIATES
(SAINT LOUIS)

Catalog Number:

V3SKID-GRO-LED-80-500-30-15'6"-
277-D (.1% ELDO LED)-1-DTL-W
Notes:

Type:**RC15-6-.1%**

LAI16-104794

VIA SKIM 3 LED

RECESSED

LUMENWERX
WWW.LUMENWERX.COM

OPTICS

GRAZING REFLECTOR OPTIC (GRO) - The intense light distribution is achieved with our Grazing Reflector Optic oriented to project light with maximum luminous intensity at 5° from nadir.


LIGHT SOURCE - LED

Custom linear array of mid-flux LED's are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

PERFORMANCE PER 4' AT 4000K

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	4000K	19	1400	75
medium output	4000K	27	2000	74
high output	4000K	42	3000	71

LIGHT DISTRIBUTION

VSKI3D-GRO-LED-80-750-NA-40-20

Wall Luminaires: 20' run

Lumen Output: 750 lm/ft

Watts: 10.5 watts/ft

Ceiling Height: 10'

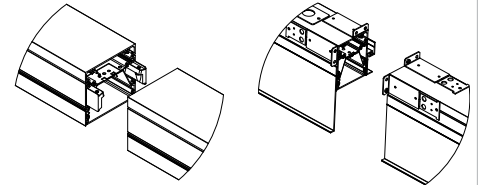
Efficacy: 71 lpw

Foot Candles on 20' wide wall, 10' ceiling

128	135	153	144	131	126	134	154	146	136
25.4	24.4	23.5	23.7	23.7	23.8	23.8	23.7	24.8	27.8
12.6	12.6	12.0	11.8	12.1	11.9	12.2	12.2	12.7	14.6
11.5	10.4	9.6	9.8	9.9	9.9	10.0	9.8	10.5	11.7
11.3	10.1	9.7	10.3	10.9	11.0	10.5	9.8	10.3	11.5

LUMINAIRE LENGTH

All individual sections are joined together onsite using the joiner kits provided. LumenWerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

Joining system

Drywall joining

Grid joining

ELECTRICAL

Factory-set adjustable output current electronic driver with 120-277V AC line input. Dimmable from at least 100%-5% with 0-10V control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume A (specify 2, 3 or 4 wires), EcoSystem H (100%-1%, fade-to-black) and EcoSystem 5 (100%-5%) dimmable drivers and DALI protocol drivers.

EMERGENCY

Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation, up to 1000 lumens per 4ft (25°C) emergency lighting output. Recharge time of 24 hours.

**Job Name:**

WEBSTER UNIVERSITY INTERDISCIPLINARY
SCIENCE BUILDING - FIXTURE QUOTE
Engineer: WILLIAM TAO AND ASSOCIATES
(SAINT LOUIS)

Catalog Number:

V3SKID-GRO-LED-80-500-30-15'6"-
277-D (.1% ELDO LED)-1-DTL-W
Notes:

Type:**RC15-6-.1%**

LAI16-104794


VIA SKIM 3 LED

RECESSED

LUMENWERX
WWW.LUMENWERX.COM

MOUNTING OPTIONS

Recess mount into exposed or concealed T-Bar or Tegular grid ceiling.
Trimless mounting detail is available for drywall ceilings.

**FINISH**

Interior - 95%, reflective matte powder coated white paint

Exterior - matte white or silver powder coating.

Custom finishes are also available.

CONSTRUCTION

Housing - Extruded Aluminum (0.095" nominal) up to 90% Recycled Content

Interior brackets - Die formed cold rolled sheet steel 18 gauge thick

Joining system - Die cast Zinc (0.95" nominal) and die Formed galvanized sheet 18 gauge

Reflectors - Extruded Aluminum (0.070" nominal) up to 90% Recycled Content.

Recessed flanges - Extruded Aluminum (0.075" nominal) up to 90% Recycled Content

End plate - Die formed cold rolled sheet steel 18 gauge thick

MAINTENANCE

LED boards are housed in a removable cartridge for easy replacement. Driver is accessible from below.

WEIGHT

Via Skim 3 4ft - 11.23lbs - 5.1kg

Via Skim 3 8ft - 22.47lbs - 10.2kg

Via Skim 3 12ft - 33.70lbs - 15.3kg

CERTIFICATIONS

ETL - Rated for Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Chicago plenum - City of Chicago Approved (CCEA)

IC rated - suitable for direct contact with insulation.

WARRANTY

LumenWerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. LumenWerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

**Job Name:**

WEBSTER UNIVERSITY INTERDISCIPLINARY
SCIENCE BUILDING - FIXTURE QUOTE
Engineer: WILLIAM TAO AND ASSOCIATES
(SAINT LOUIS)

Catalog Number:

V3SKID-GRO-LED-80-500-30-15'6"-
277-D (.1% ELDO LED)-1-DTL-W
Notes:


Type:**RC15-6-.1%**

LAI16-104794


VIA SKIM 3 LED

RECESSED


LUMENWERX
WWW.LUMENWERX.COM

350 LUMEN AT 80CRI - LOW OUTPUT**PERFORMANCE PER 4'**

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	3000K	20	1400	71
low output	3500K	19	1400	73
low output	4000K	19	1400	75

500 LUMEN AT 80CRI - MEDIUM OUTPUT**PERFORMANCE PER 4'**

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
medium output	3000K	28.5	2000	70
medium output	3500K	28	2000	72
medium output	4000K	27	2000	74

750 LUMEN AT 80CRI - HIGH OUTPUT**PERFORMANCE PER 4'**

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
high output	3000K	45	3000	67
high output	3500K	43.5	3000	69
high output	4000K	42	3000	71