



Rev. 10/16/12

DS6R - Dry Switch Monitor

G13


ETA Line

Overview

The DS6R module monitors six dry switch closure devices and provides one resistive output to the controller.

Each switch closure subtracts a precise resistance from the output so a simple subtraction algorithm at the controller decodes which switches are set. Each switch terminates on an independent plug on the front of the DS6R module and an LED associated with each input indicates switch closure for simple troubleshooting.

The DS6R plugs into the BP2, BP4 or BP8 backplane.

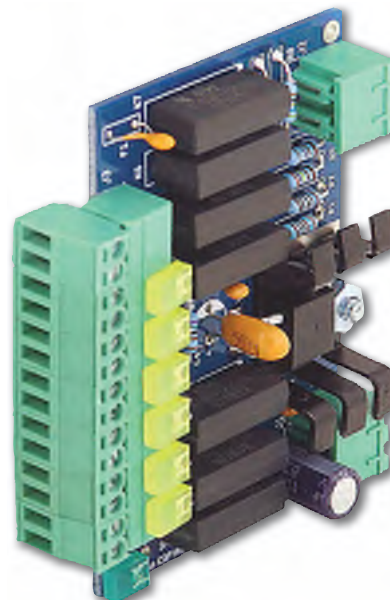


DS6R - Dry Switch Monitor

<u>Part Number</u>	<u>Description</u>
BA/DS6R	Dry Switch Monitor, 30K Output
BA/DS6R-10K	Dry Switch Monitor, 10K Output

See end of Section G for list pricing.

Associated Products

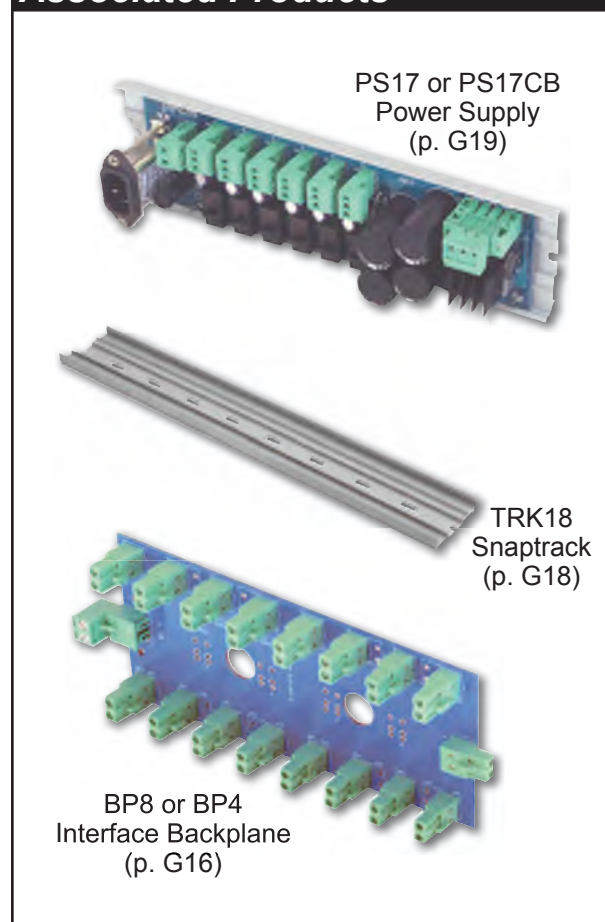

Specifications

