


[illegible]

Cable Legend

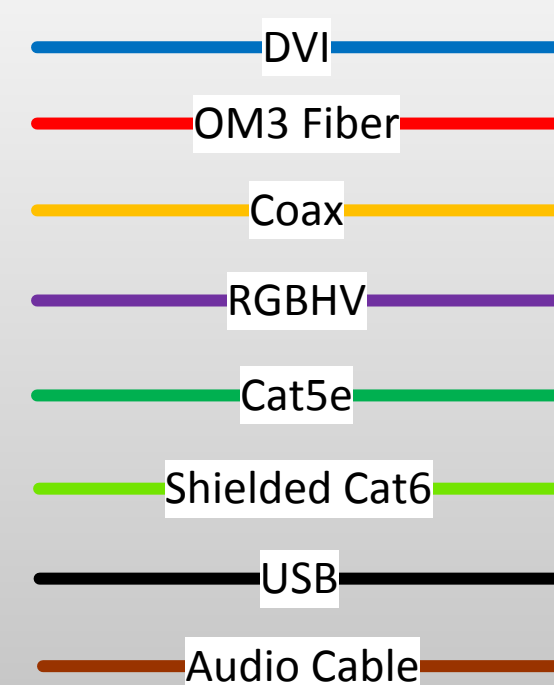


RGB Options

OSS-D1D

OSS-D2D

MS MCMS

Page #	RGB1
--------	------

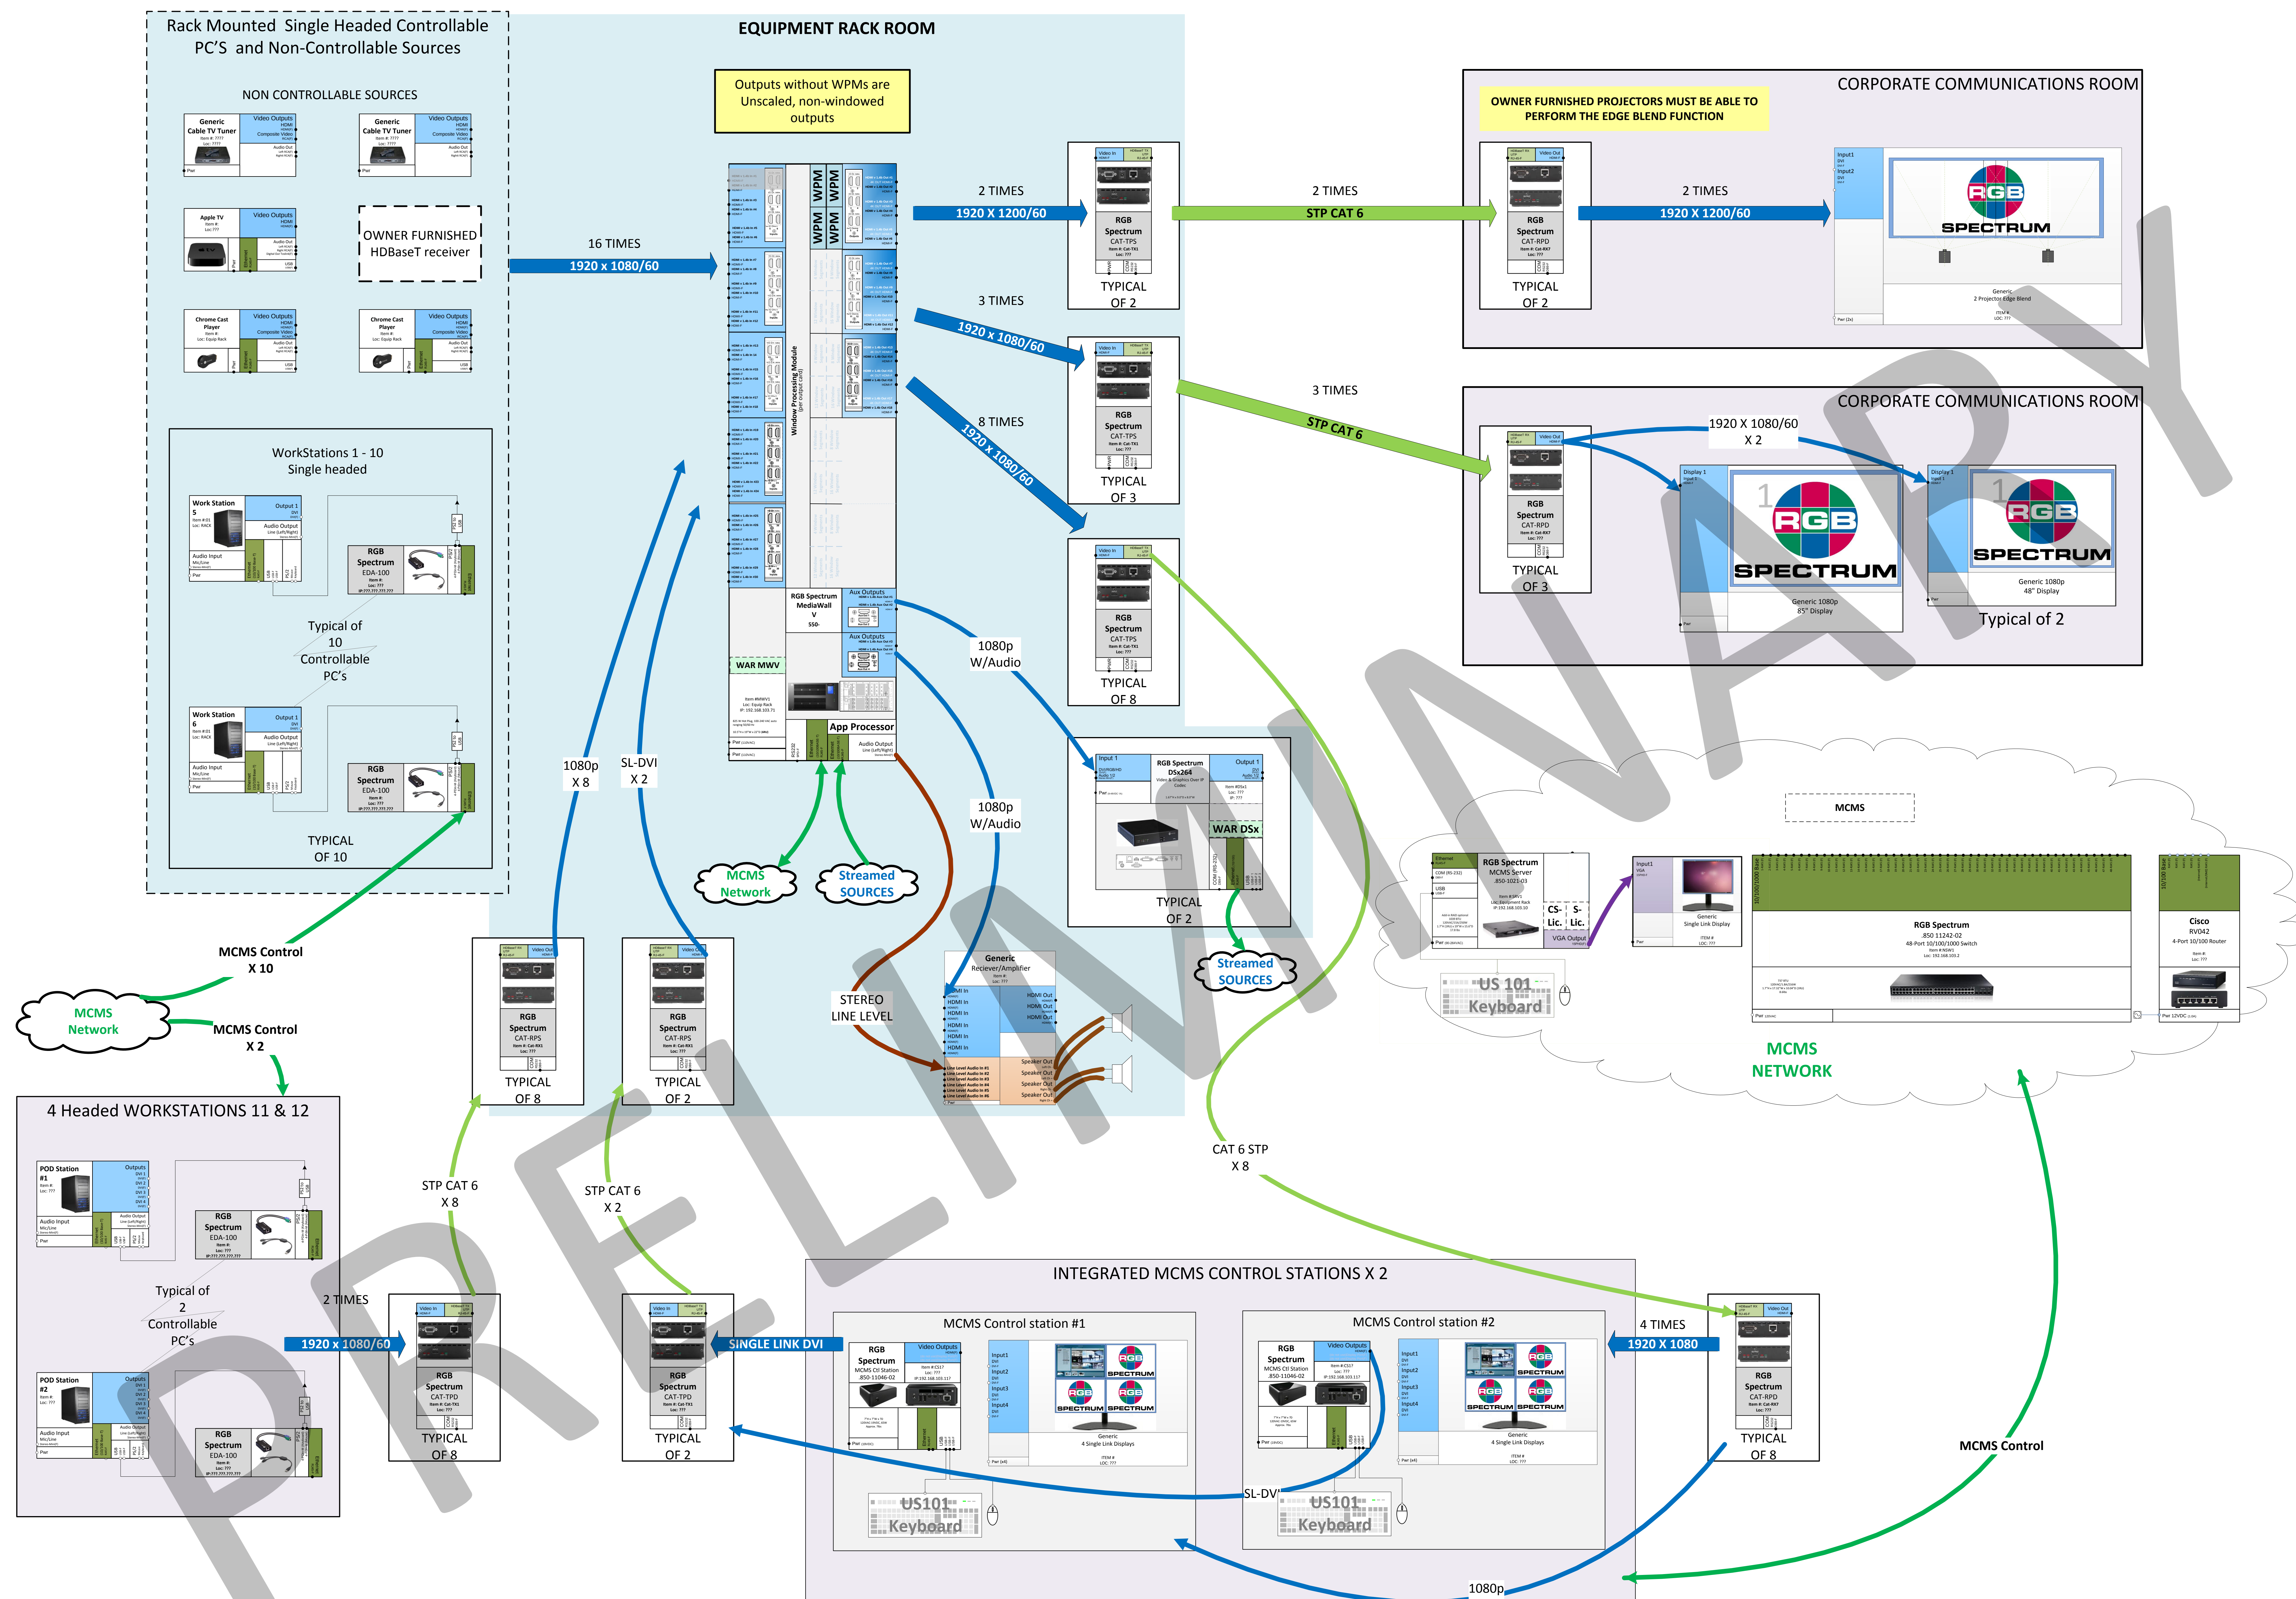

RGB Spectrum is not a system integrator or consultant on this project. Based upon limited knowledge, the company provides this conceptual system drawing as a design aid only. The bidding contractor / system integrator is solely responsible for meeting all specified project functionality and operational requirements. It is recommended that you verify this conceptual drawing with your own design team and end user. Unless otherwise noted, this drawing assumes maximum 5 meter analog and/or digital video cable lengths. Longer cable runs will require the appropriate type of signal extender to maintain image integrity and signal compliance. Any use of HDBase-T assumes high-quality shielded CAT-6 cable. CAT-5 cable is not recommended, especially for longer runs.

SPECTRUM

204600838_GeorgiaPower_CorpComm_Avyve_REV 01.01 ROM

Quantity	Part Number	Description
2	850 11046	MCMS Control Station, Microsoft Windows 7 embedded
13	CAT RPD	Single channel CAT-Linx HDBaseT receiver; HDCP compliant; HDMI and RS-232; powered by Linx TPO output card or CAT TPS
10	CAT RPS	Single channel CAT-Linx HDBaseT receiver; HDCP compliant; HDMI and RS-232; externally powered (PSE); for stand alone pair with CAT TPD or CAT WPD. (For use with CAT 6 cabling only.)
10	CAT TPD	Single channel CAT-Linx HDBaseT transmitter; HDCP compliant; HDMI and RS-232; powered by CAT RPS
13	CAT TPS	Single channel CAT-Linx HDBaseT transmitter; HDCP compliant; HDMI and RS-232; externally powered (PSE); for stand alone pair with CAT RPD; includes universal power supply. (For use with CAT 6 cabling only.)
2	DSx 264	DSx 264 IP Video and graphic streaming codec
12	EDA 100	MultiPoint Control Room Management System External Desktop Agent (EDA) includes one PS2 to USB adapter
1	MCMS	Basic MCMS hardware package including server, router, switch, and software. Required for each MCMS system
2	MCMS CS-License	Software license for each control station used in an MCMS system (hardware sold separately).
24	MCMS S-License	Software license for each source used in an MCMS system.
1	MS MCMS	One Year software maintenance and support for MCMS2.0. Price is 20% of the list price of the purchased MCMS product.
1	MWV-550-AP-2K-28/18/9-16	6 RU chassis. System provides (28) Available 2K input ports, (18) 2K or (9) 4K output ports, 16 windows per scaled output card/row and an Application Processor
1	OSS-D1D	Day 1 OnSite Support and/or Training during regular business hours for North America Locations, includes all Travel Expenses
1	OSS-D2D	Day 2 OnSite Support and/or Training during regular business hours for North America Locations, includes all Travel Expenses - OSS-D2D is required for each additional Support Day after Day 1
2	WAR DSx	1 year extended warranty - DSx all models
1	WAR MW V	Extended Hardware Warranty for years two through five. Percentage of total hardware price: one additional year = 5%, two additional years = 12.5%, three additional years = 22.5%, four additional years = 35%.