


ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Corning ALTOS® cable with FastAccess® technology is an all-dielectric gel-free cable designed for outdoor and limited indoor use for campus backbones in lashed aerial and duct installations. The innovative FastAccess technology feature combined with the all-dielectric gel-free loose tube design simplifies removal of the cable jacket reducing cable end access time by at least 50 percent. Equally important is the overall reduction in risk of inadvertent fiber damage and risk to installers from sharp cable access tools. The cable is fully waterblocked using craft-friendly, water-swellaable materials, which means no clean up is required. The flexible buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy mid-span access. The all-dielectric gel-free cable construction requires no bonding or grounding, and these cables have a medium-density polyethylene jacket that is rugged, durable and easy to handle. A variety of fiber types are available including 62.5 μm and 50 μm , single-mode and hybrid versions, as well as fibers with Gigabit and 10 Gigabit Ethernet performance.

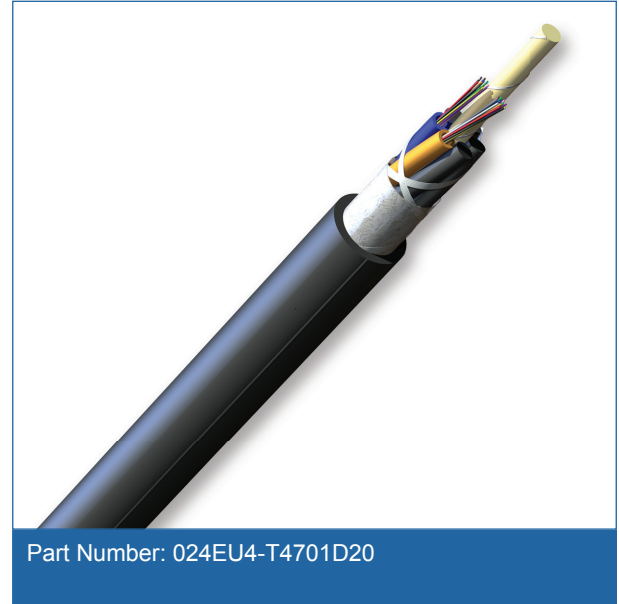

Features and Benefits

Contains FastAccess® technology

Innovative cable jacket feature reduces cable end access time by at least 50 percent and reduces overall risk of inadvertent fiber damage as well as risk to installers from sharp cable access tools

Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Fully waterblocked loose tube all-dielectric gel-free design


Simple access and no clean up

Industry-standard performance

Meets the requirements of Telcordia GR-20, Issue 3 and ICEA S-87-640

Available in 62.5 μm , 50 μm , single-mode and hybrid versions

Ready for any application including Gigabit Ethernet and 10 Gigabit Ethernet

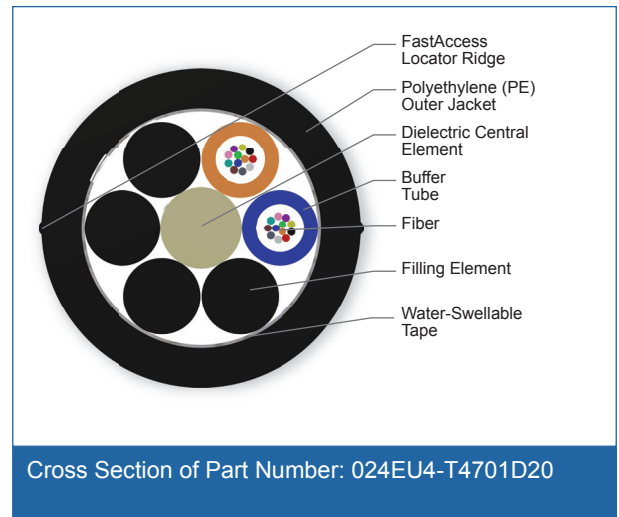

ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Standards

Common Installations Outdoor lashed aerial and duct; indoor when installed according to National Electrical Code® (NEC®) Article 770

Design and Test Criteria ANSI/ICEA S-87-640

Specifications

General Specifications

Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	24
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	2
Buffer Tube Color Coding	Blue, Orange
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	4
Tape	Water-swellaable
Number of Ripcords	1

CORNING

ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Cable Design

Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	73 kg/km (49 lb/1000 ft)
Nominal Outer Diameter	10.5 mm (0.41 in)
Min. Bend Radius Installation	158 mm (6.2 in)
Min. Bend Radius Operation	105 mm (4.1 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	SMF-28e+® fiber
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Typical attenuation	0.33 dB/km / 0.33 dB/km / 0.19 dB/km

* Typical attenuation values match the attenuation values listed in the optical fiber specifications. See www.corning.com/opticalfiber for Corning optical fiber specifications. Better attenuation performance options are available for some fiber and cable types. Contact Customer Care for additional fiber options.

* * SMF-28® Ultra and ClearCurve® XB fiber deliver up to 10x better macrobend loss performance compared to the G.652.D standard and up to 33 percent better macrobend loss performance than the G.657.A1 standard for 10mm radii bends.

CORNING

ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Ordering Information

Part Number	024EU4-T4701D20
Product Description	ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology, 24 F, Single-mode (OS2)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2014 Corning Optical Communications. All rights reserved.

CORNING

Shop Drawing Submittal Review

Transmitted To: Cannon Design

Date: January 19, 2017

Attention: stl-cac@cannondesign.com

Contact Person / WTA Field Inspector:
Patrick Garner

Project Name: Webster University-**ISB**

Reviewed by: Tom Becker (Faith Group)

Project No. WT 14127.01
FG 235-001

☐ UPS

☐ Courier

☒ **Email**

Copies	No.	Description
1 PDF	271300T05	(Submittal No.'s:)
		(Cannon #271300-006) - (Paric #15051-) - (FG #)
		➤ Backbone Cabling Product Data

***Remarks: See Submittal Review from Faith Group.**

c: Kelvin Patel
Kpatel@cannondesign.com

☒ ***Reviewed**

☒ ***Revise and Resubmit**

Corrections or comments made on shop drawings during this review do not relieve contractor from compliance with requirements of drawings and specifications. This check is only for review of general conformance with the design concept of project and general compliance with information given in contract documents. Contractor is responsible for: confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordinating his work with that of all other trades; and performing his work in a safe and satisfactory manner.

